


Please note:

- Do not shine the LED directly at people's eyes at short distances. This can cause short-term vision issues. Use at distances of at least 1m from subject – or use a reflector/diffuser to soften the light.
- Do not place the LED close to alcohol or flammable objects.
- Do not place liquids on or near the LED. The product is not water, splash or dust resistant.
- Use a soft cloth and neutral cleaner to clean the LED light. Do not use strong cleaning agents or solvents such as thinners, gasoline or alcohol to clean the LED light.
- Do not store the LED at temperatures of +40°C as high temperatures may damage the product components.
- Do not use the LED in outdoors in direct sunlight for an extended period of time to prevent the product from overheating and possible damage.

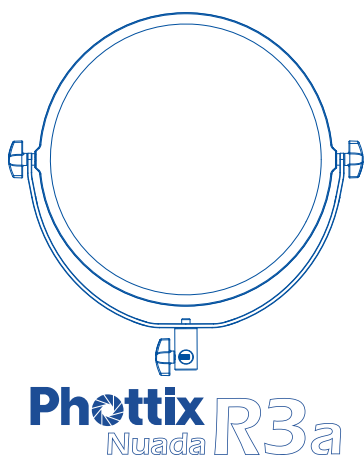

Features


The Phottix Nuada R3a is a powerful light source for still and video photography. It uses the latest in flicker-free LED technology, making it efficient and durable. Built-in Bluetooth remote control system adjusts LED functions at mobile devices.

The Nuada R3a features:

- Softlight design for 50W of flattering light
- Excellent color - CRI rating of 95+
- Phottix mobile Apps of bluetooth remote control
- Digital brightness and temperature control
- Battery and AC power modes
- Compact size — 13mm thick
- 2500K-8500K color temperature


Parts

- Battery Ports
- LCD Display
- Brightness Button
- Color Temperature Button
- Channel / Group Button (CH/Grp)
- Adjustment Dial
- AC Adapter Port
- Power / Battery / AC modes Switch
- Battery Release Button



Mounting and Adjusting the Nuada R3a

- Use the mounting bracket to mount the Nuada R3a to a light stand or other mount. The Nuada R3a can be mounted horizontally or vertically.
- Ensure the mounting bracket Locking nut is securely fastened.
- Loosen and tighten the locking nuts on the mounting bracket to adjust the Nuada R3a angle.

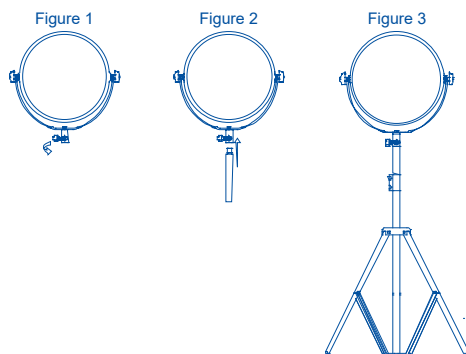

To use NP-style Batteries

- Align the battery with the battery port.
- Push the battery until locked into position.
- Move the Power / Battery / AC Modes switch to the battery position.

Please Note:

The Nuada R3a will operate with 2 pcs NP-F750 or NP-F960 batteries being used only.

Removing Batteries

Push the battery release button and remove battery from the battery chamber.

Using AC Power

- Connect the AC adapter to the AC adapter port on the Nuada R3a
- Plug the other end of the AC adapter into mains power.
- Move the Power / Battery / AC Modes switch to the AC position.

Power OFF Nuada R3a

Move the Power / Battery / AC Modes switch to the center position.

The LCD Display On the Nuada R3a LCD Display



- Brightness displayed from 01-100%.
- Color Temperature is displayed from 2500K-8500K.
- Channel (CH) from 01-40
- Group A/B/C
- The estimated remaining battery power is indicated by the battery icon.
- The bluetooth connecting signal status display.

Adjusting Brightness and Temperature

- Press the Brightness button and turn the Adjustment Dial to adjust output from 01-100%.
- Press the Color temperature button and turn the Adjustment Dial to adjust color temperature from 2500K-8500K.

How to connect the device of Bluetooth by Phottix apps

- Start on "Bluetooth" and "GPS" on the mobile device.
- Open the Phottix apps.
- Press the [+] icon to add LED equipment on the list. (PIC. 1)
- When the device success in searching the LED items, the apps will show the item model. Then press "Add" button. (PIC. 2)

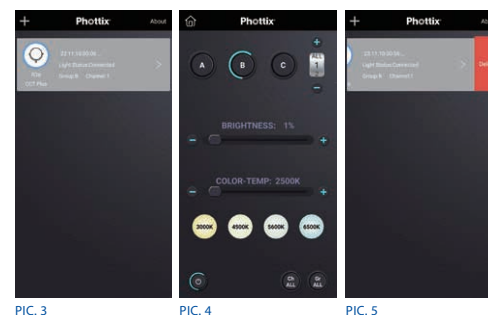

- Press the LED model in the LED list that will enter the control interface. (PIC. 3)
- In interface, set the group and channel that is same on LED light setting. (PIC. 4)
- Delete the LED model in the list, left slide and press the delete button. (PIC. 5)

Setting the Group on the Nuada R3a LED

- Press the Channel Button (CH/Grp) on Nuada R3a.
- Use the adjustment dial to set the group between A/B/C.

Setting the Channel on the Nuada R3a LED

- Press the Channel Button (CH/Grp) twice on Nuada R3a.
- Use the adjustment dial to set the channel from 1-40.

Please note:

The Channel / Group on Phottix mobile apps and Nuada R3a needs to be the same to remote control the Nuada R3a.

APP installation:

Phottix Lighting Control APP Download Center

www.phottix.com/phottix-app-center/



Technical Specs

Nuada R3a LED

Color temperature :	2500K- 8500K (±200K)
Brightness range :	01% - 100%
Max. brightness / illuminance @ 1m (±150LUX) :	2500K - 951 LUX / 88 fc 5500K - 1140 LUX / 106 fc 8500K - 1020 LUX / 95 fc
Max.Power :	50W (±3W) 2500K – 49.4W 5500K – 51.4W 8500K – 49.6W
Color rendering index :	CRI 95+ / TLCI 96+
AC/DC adaptor operation voltage :	100-240VAC
Battery operation :	NP-F750 or NP-F960 battery x2
Apps remote distance :	15m
LED numbers :	136 PCS Cool color 136 PCS Warm color
Dimension :	430mm x 433mm x 42mm
Weight :	1995g (not include battery)

What's included

- Nuada R3a LED panel
- AC adapter
- UK plug
- US plug
- EU plug
- SAA plug
- Carrying bag

Phottix® Warranty Card


Phottix Warranty Card

Phottix offers warranty service and/or replacement that comply with local regulations. For full information see: phottix.com/warranty

Keep this card – do not lose.

安全須知

- 避免用本產品於近距離對人眼直接照射以避免短暫性影響視力。建議近距離使用時加上柔光罩
- 請勿將本產品存放在酒精或易燃物品附近，以免發生危險
- 請勿將本產品放置於液體附近，本產品沒有防水，防濺及防塵功能。
- 不要使用稀釋劑，酒精等有機溶劑來清潔產品表面，以免損壞外殼。
- 請勿將本產品存放於攝氏40度以上的地方，避免對內部元件造成損壞。
- 在戶外使用本產品時，請勿長時間在被陽光直射的環境下使用本產品，以免因過熱而造成損壞。

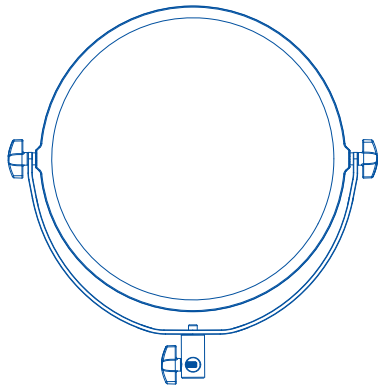

Phottix
Nuada R3a

產品功能


Phottix Nuada R3a 是一款適用於攝影和攝錄的強大光源。它採用最新的無閃爍 LED 技術，使其高效且耐用，內置藍牙遙控系統可透過流動裝置調校LED功能。

Nuada R3a的特點：

- 柔光設計可提供50W功率強度的迷人光線
- 出色的色彩 - CRI 值達到95+
- 可透過Phottix流動應用程式以藍牙控制的
- 可透過數位亮度和色溫控制
- 可用電池和交流電源模式來使用
- 色溫可在範圍2500K - 8500K調節
- 輕巧尺寸—厚度為13mm

部件


1. 電池倉
2. LCD 顯示屏
3. 亮度按鍵
4. 色溫按鍵
5. 頻道 /組別按鍵 (CH/Grp)
6. 調整轉輪
7. DC插座
8. 電源開關選擇
9. 電池拆卸按鍵



產品安裝及使用

a. 產品安裝

1. 取出柔光燈，將固定座旋鈕逆時針擰出 (圖 1)。
2. 將三腳架的固定杆插入到固定座的孔位內 (圖 2)。
3. 順時針擰緊固定座旋鈕，將柔光燈固定於三腳架上 (圖 3)。

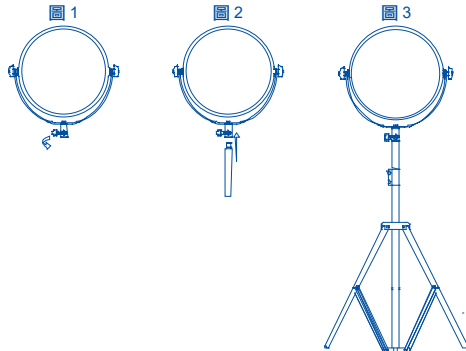

b. 角度調節

1. 將柔光燈左右兩側的角度調節旋鈕逆時針擰鬆至燈面可以前後轉動
2. 將燈面調節至所需角度
3. 將左右兩側的角度調節旋鈕順時針擰緊

使用NP電池供電

1. 將兩顆索尼NP-F系列的電池卡入到電池倉內
2. 將電池推進電池倉
3. 將電源開關撥動到電池端，即可使用電池供電及開啟LED

註：本產品需安裝兩顆NP-F750或NP-F960電池才可以使用

移除電池

按下電池固定鎖並將電池推出

使用外接電源

1. 將外置電源轉接器插入電源插孔
2. 將電源轉接器另一端連接電源插頭
3. 將電源開關撥動到AC端，即可使用適配器供電及開啟LED

開機

在開機狀態下，將電源開關撥動到中間端開機

Nuada R3a 顯示屏顯示


- 亮度顯示由1-100%
- 色溫顯示由2500K- 8500K
- 頻道CH01-40
- 組別A/B/C
- Nuada R3a電池電量估計資訊
- 藍牙連接狀態顯示

調整亮度及色溫


1. 按下亮度按鍵後轉動調整轉輪，調節亮度由01-100%。
2. 按下色溫按鍵後轉動調整轉輪，調節色溫由2500K-8500K。

如何在Phottix流動應用程式透過藍牙來連接設備

1. 啟動流動設備上的 "藍牙"和"GPS"程式。
2. 開啟Phottix 應用程式。
3. 按 [+] 圖示在清單中新增 LED 設備。(PIC. 1)




PIC. 1



PIC. 2

4. 當程式成功搜尋 LED 設備後，程式將顯示該設備型號。然後按 [Add] 按鈕加入在設備清單。(PIC. 2)

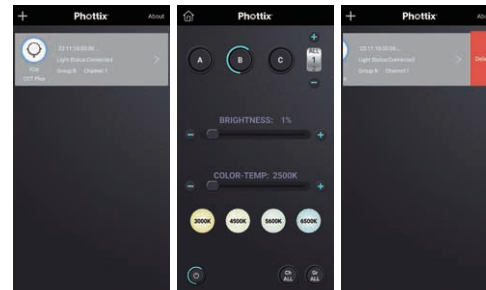

PIC. 3

PIC. 4

PIC. 5

5. 在LED清單中點選LED型號，即可進入控制介面。(PIC. 3)
6. 在介面中設定與LED燈設定相同的組別和頻道。(PIC. 4)
7. 刪除清單中的LED型號，向左滑動並按下 [Delete] 按鈕。(PIC. 5)

在Nuada R3a上設置組別

1. 在Nuada R3a按下頻道/組別按鍵 (CH/Grp)。
2. 轉動調節旋鈕選擇組別A/B/C。

在Nuada R3a上設置頻道

1. 在Nuada R3a按下兩次頻道/組別按鍵 (CH/Grp)。
2. 轉動調整轉輪選擇組別頻道CH 1-40。

註：Nuada R3a主機跟Phottix流動應用程式的頻道和組別必須一樣才可遙控。

安裝應用程式：

請瀏覽Phottix燈光控制應用程式下載中心
www.phottix.com/phottix-app-center/



技術規格

Nuada R3a主機

色溫：	2500K- 8500K (±200K)
亮度範圍：	01% - 100%
最大照度 @ 1m (±150LUX)：	2500K - 951 LUX / 88 fc 5500K - 1140 LUX / 106 fc 8500K - 1020 LUX / 95 fc
最大功率：	50W (±3W) 2500K – 49.4W 5500K – 51.4W 8500K – 49.6W
顯色指數：	CRI 95+ / TLCI 96+
交流/直流適配器工作電壓：	100-240VAC
電池操作：	NP-F750 或 NP-F960 電池 x2
應用程式遙控距離：	15m
LED 數量：	136 顆冷色，136 PCS顆暖色
尺寸：	430mm x 433mm x 42mm
重量：	1995g (不包括電池)

附件

- Nuada R3a 補光燈本體 • 電源適配器 • 便攜袋
- 插頭(英規) • 插頭(美規) • 插頭(歐規) • 插頭(澳規)

Phottix®
保 修 卡

Phottix 保修卡

Phottix 將會按當地法規提供保修 / 更換服務。

請小心保存此卡，不要遺失