



Phottix®
Proffix®



We are living in an extreme age of content creation and sharing.

Around the world, millions of photographers, videographers, content creators, and livestreamers are all creating a huge variety of content while doing everything they can to get their work noticed.

On top of that, millions more people are now working and studying at home with videoconferences becoming the de-facto way for people in business and in school to communicate.

Being seen, heard and noticed has become increasingly challenging as billions of new creations are shared each day.

That’s where we come in.

At Phottix, we believe that “**creators**” should spend much less time worrying about or figuring out their gear, and much more time being creative with their gear.

We believe gear shouldn’t get in the way. It should clear the way.

We believe that the creative process shouldn’t be a process; at least when it comes to your gear.

The present times are challenging. SO, we have challenged ourselves to expand to meet the changing needs of our diverse community of Creators with gear that is adaptable, affordable and ultimately, makes it easier to create whatever it is they need to create. With over 40 patents, numerous awards and a team of passionate engineers and designers, we offer a range of LEDs, Studio Lights, Shoe-Mount Flashes, Softboxes, Light Stands, and Wireless Remotes.

Our commitment is simple:
no matter what story you want to tell, you’ll have the right gear at hand.





helping creators
BE MORE CREATIVE

Phottix
Academy

Established for promotes photography arts and culture in Hong Kong, Over 1,000 sq ft, our studio is equipped with professional shooting equipment, Suitable for product shoots, high-end portraits, pets, fashions, commercials, chroma key and videos etc.



We also can be set flexibly change to a workshop space, events or lecture format functions.

We are provide comprehensive support for All community groups and organizations, artists and tutors.



FULLY EQUIPPED

- Phottix professional flash and LED lighting system
- 18 plus 3m wide background colors
- Independent dressing room
- Separate toilet
- Spacious reception room
- 65-inch ultra HD LED TV
- Free Wi-Fi
- Wireless microphone and audio system
- Podium
- Projector and projection screen

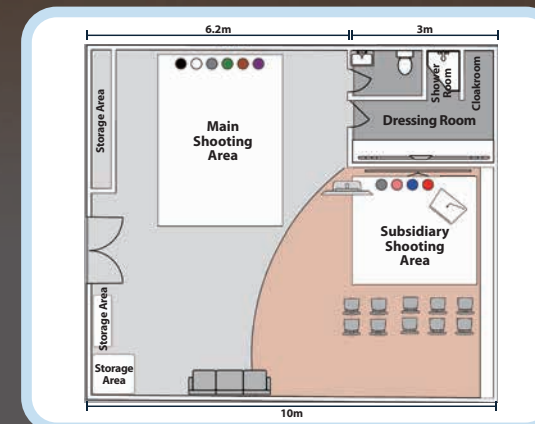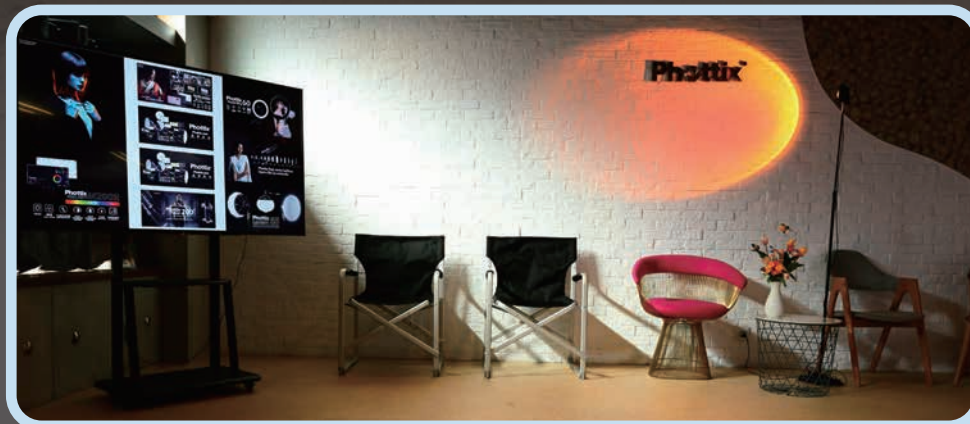

Commodious space

- Dual shooting area can be shot at the same time
- Over 1,000 sq ft of practical space can accommodate a large number of guest

Superior location

- Located in Kwun Tong
- Near to MTR
- Convenient transportation



Phottix X600

COB DAYLIGHT LED

UNLEASH THE ULTIMATE POWER

- DAYLIGHT COB LED
- EXTERNAL CONTROL BOX
- 500 W
- 95+
- 99 CHANNELS
- POWER CONTROL
- CCT
- 5600K
- 5 SCENARIO EFFECTS
- V MOUNT BATTERY
- AC POWER
- 2.4G REMOTE CONTROL
- SUPPORT DMX 512
- SUPPORT BOWENS MOUNT

The new Phottix X600 COB Daylight LED creates a new trend of LED continuous lighting that broadens the limits of classic flash strobe lighting. The X600 COB Daylight LED light has a ultimate output power of 500W brightness and provides excellent light quality within 5600K daylight.

The Phottix X600 LED light is equipped with a Bowens mount making it possible to be used with a wide range of popular light modifiers. The brightness in lumens is up to 28000lux@2m with the standard reflector.

The X600 LED light features a separate external controller with an LCD display where you can adjust the brightness, using the built-in 5 scenario effects modes, DMX mode. The X600 LED light can also be controlled from a 2.4G Remote control with 99 channels. This light can be powered by AC power or V-mount lithium battery.

SKU of Phottix X600 COB Daylight LED Light
• 81456 (EU) • 81457 (US) • 81458 (UK) • 81459 (AU)

Features

- 500W of flattering light
- Excellent color rendering – CRI 95+ (TLCI 97+)
- Separate design of LED body and controller box
- Color temperature 5600K
- Build-in super-silent cooling module
- Digital brightness control
- 5 Scenario effects
- 2.4G Remote control with 99 channels
- Support DMX 512
- V-Mount battery and AC Power
- Support Bowens mount light modifiers
- Durable Carry Bag



To use V-mount Battery



Using AC Power



Pull and hold fasten release lever for Install & remove light modifiers

What's included



X600 Light • X600 Control box • Remote control • Standard reflector
Connection cable • AC power cable • Carrying bag

Ultra-Quiet Cooling Module

Build-in Ultra-quiet cooling module, it's including 2 quiet cooling fan and dense beehive pattern vents, it can prevent the LED light from over-heating and extend the life of the LED.

3 ways remote control methods



Remote Control Box



2.4G Remote Control



DMX networks Control

Technical Spec

Color Temperature:	5600K
Brightness Range:	0% – 100%
Max. Brightness / Illuminance:	28000Lux @ 2m / 5600K (with standard reflector)
Max. Power:	With AC input: 500W @ full power With batteries or DC input: 300W @ full power
Led Type:	COB
Color Rendering Index:	95+ / TLCI 97+
Input Power AC/DC Adaptor Operation Voltage:	100-240VAC
Dc Power Operation:	36VDC 10A
Battery Operation:	14.8V / 180W min. V-Mount battery x 4
Dmx Sockets:	RJ-45
Dimension:	LED Light – 183 x 140 x 340mm Control box – 264 x 156 x 245mm
Weight:	LED Light – 2700g, Control box – 2950g



Phottix X160

Bi-COLOR LED


Meet the new X160 COB Bi-Color LED light by Phottix.

The new Phottix X160 LED creates a new trend of LED continuous lighting that broadens the limits of classic flash strobe lighting.

The X160 LED light has a strong output power of 150W brightness and provides excellent light quality within 2800-6800K range of colour temperature. The Phottix X160 LED light is equipped with a Bowens mount making it possible to be used with a wide range of popular light modifiers. The brightness in lumens is up to 37000lux@1m with the standard reflector.

The X160 LED light features a separate external controller with an LCD display where you can adjust the brightness and colour temperature, using the built-in 5 scenario effects modes, DMX mode. The X160 LED light can also be controlled from a smartphone app via Bluetooth connection available for Android and IOS. This light can be powered by AC power or V-mount lithium battery.

SKU of Phottix X160 COB Bi-Color LED Light
81451 (EU) 81452 (US) 81453 (UK) 81454 (AU)

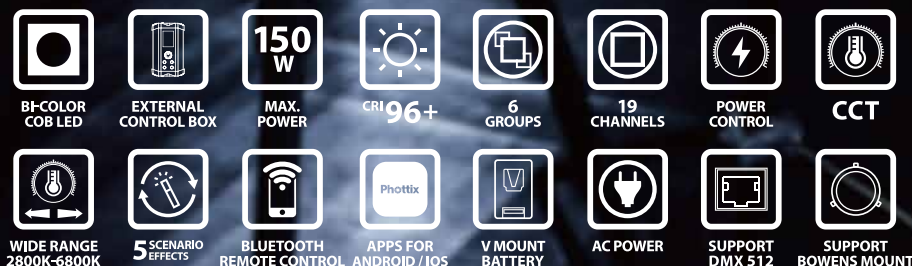

Features

- 150W of flattering light
- Excellent color rendering – CRI 96+ (TLCI 98+)
- Separate design of LED body and controller box
- Wide range of color temperature 2800K – 6800K
- Smartphone APP bluetooth remote control with 6 groups and 19 channels
- Support DMX 512
- Digital brightness control
- 5 Scenario effects
- V-Mount battery and AC Power
- Support Bowens mount light modifiers
- Build-in super-silent cooling module
- Durable Carry Bag
- Apps for Android and iOS



To use V-mount Battery



Using AC Power



Pull and hold fasten release lever for Install & remove light modifiers

What's included



X160 Light • X160 Control box • Standard reflector • Connection cable
AC/DC adaptor • AC power cable • Control Box bracket • Carrying bag

Ultra-Quiet Cooling Module

Build-in Ultra-quiet cooling module including quiet cooling fan and vents, it can prevent the LED light from over-heating and extend the life of the LED.

Wide Range Of Color Temperature



2800K



5500K



6800K

Color temperature photo are reference only*

3 ways remote control methods



Remote Control Box



Mobile APP Control



DMX networks Control

Technical Specs

Color temperature:	2800K - 6800K
Brightness range:	0% - 100%
Max. brightness / illuminance:	37000Lux @ 1m / 5600K (with standard reflector)
Max. Power:	150W @ full power
LED type:	COB
Color rendering index:	96+ / TLCI 98+
Input power AC/DC adaptor operation voltage:	100-240VAC
Battery operation:	V-Mount battery
Dimension:	342 x 193 x 183mm
Weight:	1770g (not included battery)



Phottix POP One

Snoot Optical Condenser

PROJECTION YOUR CREATIVE IMAGERY

Phottix Pop One Snoot Optical Condenser get creative with your gobo projections for Bowens mount COB LED Light or spotlight.

- INTERCHANGEABLE LENS
- MODELLING BLADE
- MANUAL FOCUS
- BUILD-IN BRIGHTENING LENSES
- BRIGHTNESS ASCENSION
- COLOR GEL FRAME
- GOBOS & PROJECT FILTER
- HEAT DISSIPATION MODULE
- NEAREST FOCUSING DISTANCE
- SUPPORT BOWENS MOUNT

Features

- Aluminum alloy Snoot body
- Build-in Brightening Lenses
- Large projection size, focus at close range
- Manual adjustment focus
- Build-in 4 pieces geometry Modelling Blade
- Color gel frame mount clips on top of lens
- Drop-in slot acceptable the Gobos and Project Filter with Gobo holder
- Interchangeable lens (40° / 20° **[Purchased Separately]**)
- Support Bowens mount LED or Strobe Lights

Drop-in slot for Gobos & Project Filter



Cooling System



Color Gel Frame Mount Clips



Manual Adjustment Focus





Build-in Geometry Modelling Blade



Projection size at the same distance



- Gobos items (SKU: 82331 included) :**
- Mixletter
 - Wave
 - Wave Point
 - Zebra Marking
 - Space
 - Dream
 - Dots
 - Orb
 - Louvre
 - Foam
 - Tree
 - Dense Palm

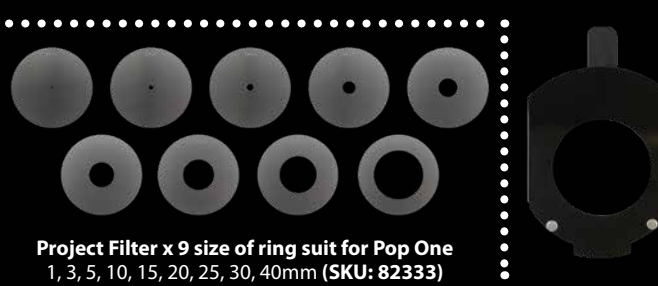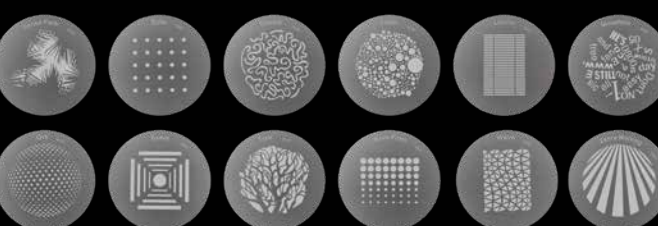

Technical Spec

Dimension:	335mm Height (Body with Lens) Lens: 118 mm / Body: 195 mm (diameter)
Mount System:	Bowens
Weight:	2.1 kg
Material:	Aluminum (Body and screws) Brightening Lenses (glass)
Lens Nearest Focusing Distance	
40° Lens:	25 cm (SKU: 82331)
20° Lens:	63 cm (SKU: 82332)

What's included

Pop One Snoot body (40° Lens) x 1, Gobos x 12, Gobo holder x 1, Color Gels x 5, Color Gel frame (SKU: 82331)

- 82331 Phottix Pop One Snoot Optical Condenser
- 82332 Phottix Pop One 20° Lens
- 82333 Project Filter for Pop One (9 size of ring suit)

Photo: HKDI | Students Project: 伙記 (Waiter)

*Image composed with two sets of lights.
Package contains one set.


HOT ONES

PROFESSIONAL PHOTOGRAPHER



Rainbow Effect Lens

Sunset Effect Lens

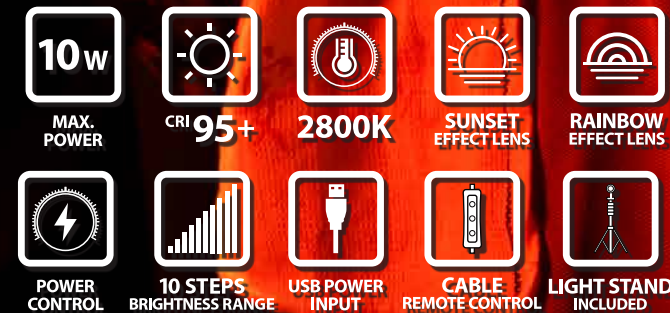

Input Power via Powerbank
(M200R NOT included*)

81300 Phottix Solar BG Magic Light Kit Set

Phottix Solar BG MAGIC LIGHT Kit Set

Just install the effect lens that comes with the package, connect to the USB power supply, then you can enjoy the magic light.

It is suitable for any occasion, whether indoor or outdoor. which is completely DIY to freely set the projection light at different distances and any angles, that it's can create an infinitely changeable, creative and romantic lighting atmosphere for a boring space.

If two effect lenses are used at the same time, an additional set can be purchased for use together to create a richer, even more unexpected lighting atmosphere.

*Image composed with two sets of lights.
Package contains one set.

Features

- Portable available only 340g
- Inter-changeable lens with Sunset Effect and Rainbow Effect
- Magic light head can be rotated 180 degrees
- Easy to use via Cable Remote Control
- 10 steps Brightness range
- Power supply from USB-C input
- Magic Light bottom 1/4" screw hole to light stand
- Light Stand included



USB-C power Cable with Remote Control

What's included

Solar BG Magic Light x 1, Sunset Effect Lens x 1, Rainbow Effect Lens x 1, USB-C power Cable with Remote Control x 1, Light Stand x 1



180 Degrees Rotatable Head



Power supply from USB-C input



Technical Specs

Projection angle:	84°
Brightness range:	10 steps
Max. brightness:	180Lux @ 1m (Sunset) 340Lux @ 1m (Rainbow)
Max. power:	10W
Input power:	5V 2.5A USB-C
Color temperature:	2800K (without lens)
Color rendering index:	95+ (without lens)
Dimension:	Ø85mm x 56mm x 126mm
Weight:	340g

Light Stand for Solar BG Magic Light

Sections	5
Extended Height:	1415 mm
Collapsed Height:	345 mm
Stand Weight:	450 g
Tube Diameters:	25, 22.5, 19.5, 16.5, 13mm
Thread:	1/4" Thread



Nuada R4 II LED light

Features

Softlight design for 70W of flattering light

Excellent color - CRI rating of 96+/TLCI 98+


Phottix LED Ecosystem (ECO1) via 2.4G remote control with 3 groups and 40 channels

Digital Power and Temperature Control

Battery and AC Powered

Compact size – 12mm thick

Anti-scratch surface panel

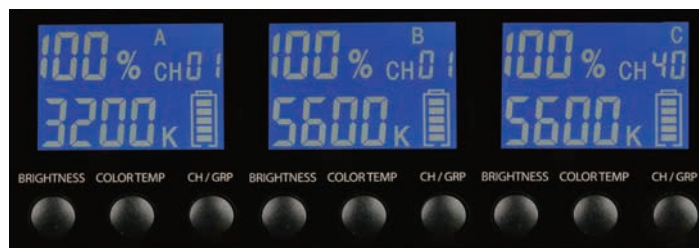

3200K-5600K color temp., Channels (1-40) and grouping (3 Group A/B/C)

Nuada R4 II LED light series is a large circular soft light built-in **Phottix LED Ecosystem (ECO1)** with 180 warm color and 180 cool color LED bulbs (3200K-5600K), ultra bright 70W full power output, mounted on the edge of the light body frame. **Phottix LED Ecosystem (ECO1)** easy to setup the lighting only via one 2.4G wireless remote control and control panel with 3 groups and 40 channels.



Our build-in diffuser and uses the latest in flicker-free LED technology to provide a uniformly illuminated area light which is soft and glareless. It's suitable for both novice and professional photographers, videographers, Youtuber and vlogger etc.



Nuada R4 II runs on Sony-compatible V-mount battery (not included) which can be used for on-location work.



What's included

Nuada R4II LED Panel • Remote control • AC Adapter • AC Power Cable • AC Adapter Hanging Bag • Carrying Bag

Phottix Nuada LED Family:

Nuada R4 II LED Light * :
81481 (EU) 81482 (US)
81483 (UK) 81484 (AU)

81428 Nuada R3 II LED Light Twin Kit *

81429 Nuada R3 II LED Light *

81422 Nuada S3 II LED Light **

81423 Nuada S3 II LED Light Twin Kit **

81430 Nuada P LED Light

Nuada Ring60 LED Light

81461 (EU) 81462 (US)

81463 (UK) 81464 (AU)

Nuada Ring60C LED Light ***
81501 (EU) 81502 (US)
81503 (UK) 81504 (AU)

Nuada Ring40C LED Light ***

81491 (EU) 81492 (US)

81493 (UK) 81494 (AU)

81470 Nuada Ring10 LED Light Go Kit

Compatible with Phottix LED Ecosystem:

ECO1 - 2.4G Remote *

ECO3 - 2.4G Remote **

ECO2 - IR Remote ***



Nuada R3 II LED Light & Twin Kit Set

Build-in Phottix LED Ecosystem (ECO1)

The new Nuada R3 II LED features the remote control and remains committed to the flicker-free technology and leading colour high accuracy of CRI96+ (TLCI 98+). The upgraded power is 50W, soft light in 12mm thick ultra-thin circular panel as well as scratch-resistant illuminated diffusion.

Features

Softlight design for 50W of flattering light

Excellent color - CRI rating of 96+/TLCI 98+

Phottix LED Ecosystem (ECO1) via 2.4G remote control with 3 groups and 40 channels

Digital Power and Temperature Control

AC adapter and 2 x Sony NP Series battery (not included battery)


Compact size – 12mm thick

Anti-scratch surface panel



The AC adapter for indoor use, or 2 pieces of Sony NP-F type battery (NP-F750 or NP-F970) for on-location use.

*Batteries not included.

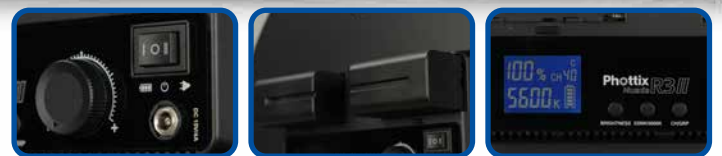

What's included

Nuada R3II LED Panel x 2 • Remote control x 1 • AC Adapter x 2 • UK plug x 2
US plug x 2 • EU plug x 2 • SAA plug x 2 • P-220 Light Stand x 2 • Carrying Bag • User manual



Nuada R3 II Twin Pack Kit Dimensions:
800mm x 400mm x 130mm

Nuada R3 II Twin Pack Kit Weight :
9430g (not include battery)

Nuada LED Light series Technical Specs:

Model:	Phottix Nuada Ring 60	Phottix Nuada R4 II	Phottix Nuada R3 II	Phottix Nuada S3 II	Phottix Nuada P
Color rendering index (CRI / TLCI):	CRI 96+	CRI 96+ / TLCI 98+	CRI 96+ / TLCI 98+	CRI 96+ / TLCI 98+	CRI 96+
Color Temp. (adjustable):	3200K~5600K	3200K~5600K	3200K~5600K	2500K~8500K	3300K~5600K
Max Brightness:	1200Lux @ 1m	1800Lux @ 1m	1400Lux @ 1m	1000Lux @ 1m	830Lux @ 0.5m
Power:	60W with USB 5V2A output	70W	50W	40W	16.2W
Battery:	NP Series	V-mount	NP Series	NP Series	NP Series
Battery Life: 5600K at Max Power	2 x NP-F750 75min 2 x NP-F970 120min	-	2 x NP-F750 70min 2 x NP-F970 90min	2 x NP-F750 110min 2 x NP-F970 175min	1 x NP-F750 225min 1 x NP-F970 320min
AC/DC adaptor:	100-240VAC	100-240VAC	100-240VAC	100-240VAC	100-240VAC
Dimensions:	dia 487mm x 47mm	548 x 539 x 38mm	430 x 433 x 32mm	376 x 266 x 25mm	255 x 100 x 30mm
Weight (not include battery):	1250g	3300g	2140g	1170g	290g

Battery Type: 20500 NP-F550 (7.4V 2000mAh) | 20502 NP-F750 (7.4V 4400mAh) | 20503 NP-F970 (7.4V 6600mAh)

Battery life data are reference only.*



Phottix Kali50 LED LIGHT Twin Pack Kit

Features

- Maximum brightness of 1800Lux (50W)
- Phottix LED Ecosystem (ECO1) via 2.4G remote control
- Excellent color rendering - CRI 96+ (TLCI 98+)
- Digital Brightness and Temperature Control
- AC adapter and 2 x Sony-compatible battery (not included battery)
- Durable aviation-grade Aluminum shell

Phottix Kali50 LED build-in Phottix LED Ecosystem (ECO1) features the remote control and remains committed to the latest in Flicker-free LED technology and leading colour high accuracy of CRI96+ with 300pcs warm color and 300pcs cool color LED bulbs (3200K-5600K). it provides a maximum brightness of 1800Lux (50W) output power in a durable aviation-grade aluminum shell.

Phottix Kali50 LED

Technical Specs

Color temperature	3200K - 5600K
Brightness range	01% - 100%
Max. brightness / illuminance	1800Lux @ 1m
Max.Power	50W @ full power
Color rendering index / TLCI	96+ / 98+
AC/DC adaptor operation voltage:	100-240VAC
Battery operation	2 x NP-F750 or NP-F960 battery
Battery Life:	2 x NP-F750 (7.4V 4600mAh) 70 min
5600K at Max Power	2 x NP-F970 (7.4V 6600mAh) 105 min
LED numbers	300 PCS Cool color
	300 PCS Warm color
Dimension	274mm x 259mm x 64mm
Weight	1180g (not include battery)
Kali50 Twin Kit carry bag Dimension	525mm x 525mm x 175mm
Kali50 Twin Kit carry bag Weight	7700 g (not include battery)



Dimmable color temperature and brightness with the two parameters can be adjusted from the Phottix LED Ecosystem (ECO1) easy to setup the lighting only via one 2.4G wireless remote control and R3 II control panel within A/B/C groups and 40 channels, Phottix LED Ecosystem (ECO1) compatible with Nuada R4 II and Nuada R3 II LED light.



What's included

Kali50 LED Panel x 2 • Remote control x 1 • AC Adapter x 2 • UK plug x 2
US plug x 2 • EU plug x 2 • SAA plug x 2 • F-180 Light Stand x 2 • Carrying Bag
User manual

ECO1 Remote Control

Technical Specs

Remote Control	40 channels 2.4G wireless remote control
Remote Control Range	<50m
Battery operation	AAA x 2

81444 Phottix Kali50 LED Light Twin Kit Set
81443 Phottix Kali50 LED Light

Phottix LED Ecosystem (ECO1) compatible with :
SKU of the Phottix Nuada R4 II LED Light :
81481 (EU) 81482 (US) 81483 (UK) 81484 (AU)
81443 Phottix Kali50 LED Light | 81444 Phottix Kali50 LED Light Twin Kit Set



Phottix Nuada S3 II LED LIGHT Twin Pack Kit

Features

- Softlight design for 40W of flattering light
- Excellent color – CRI rating of 96+/TLCI 98+
- Phottix LED Ecosystem (ECO3) via 2.4G remote control with 3 groups and 40 channels
- Wide range color temperature 2500K-8500K
- Digital brightness and temperature control panel
- AC adapter and NP batteries operation (not included battery)
- Compact size – 25mm thick




Channels (1-40) and grouping(3 Group A/B/C)

Phottix Nuada S3 II LED

Technical Specs

Color temperature	2500K - 8500K
Brightness range	01% - 100%
Max. brightness / illuminance	1000Lux @ 1m
Max.Power	40W @ full power
Color rendering index / TLCI	96+ / 98+
AC/DC adaptor operation voltage:	100-240VAC
Battery operation	2 x NP-F750 or NP-F960 battery
Battery Life:	2 x NP-F750 (7.4V 4600mAh) 70 min
5600K at Max Power	2 x NP-F970 (7.4V 6600mAh) 90 min
LED numbers	144 Pcs Cool color
	144 Pcs Warm color
Dimension	376mm x 266mm x 25mm
Weight	1170 g (not include battery)
Nuada S3 II Twin Kit carry bag Dimension	525mm x 525mm x 175mm
Nuada S3 II Twin Kit carry bag Weight	6200 g (not include battery)

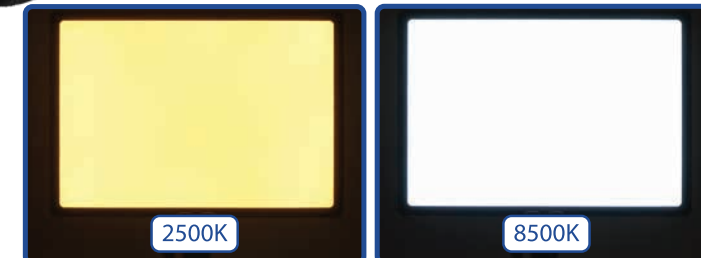

Wide range color temperature 2500K -8500K



What's included

Nuada S3 II LED Panel x 2 • Remote control ECO3 • AC Adapter x 2 • UK plug x 2
US plug x 2 • EU plug x 2 • SAA plug x 2 • F-180 Light Stand x 2 • Carrying Bag
Mounting bracket x 2 • User manual

ECO3 Remote Control

Technical Specs

Remote Control	40 channels 2.4G wireless remote control
Remote Control Range	<50m
Remote battery operation	AAA x 2

81422 Phottix Nuada S3 II LED Light
81423 Phottix Nuada S3 II LED Light Twin Kit Set

Phottix Nuada Ring 10 LED LIGHT Go Kit




81470 Phottix Nuada Ring10 LED Light Go Kit

Features:

- Softlight design for 10W of flattering light
- Excellent color - CRI rating of 96+
- Handy portable 10inch dia sizes
- Easy "Touch & Slide" brightness and color temp. control
- Foldable 90°/180° compact design
- Micro USB 5V2.1A Power input
- MT-one mini tripod easy for outdoor or flexible live stream




CRI 96+ Phottix Nuada Ring 10 is a perfect light for live streaming, photography, videography, beauty makeup and smartphone content creation. The Ring dia. 10 inches (25.4cm) as a lightweight, portable and dimmable LED that satisfying different environmental shooting needs.



180 DEGREE FOLDABLE DESIGN

Phottix Nuada Ring 10 unique 90°/180° foldable design. This is a space-saving feature.

Furthermore, lighting up 2 users face-to-face online meeting in different cameras.

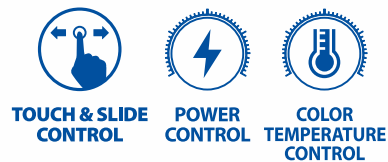

The control panel is "Touch & Slide" bar that easily finger touch from left to right turning the brightness and color temperature.

It can assemble Phottix MT-One mini tripod with cold shoes mount for selfie and video recording with an external microphone. One micro USB power input port that allows you making the content everywhere with power-bank.



Phottix Nuada Ring10 LED Light Technical Specs:

Color Rendering Index:	96+
Color Temperature:	2600K - 5800K
Max. Brightness / Illuminance:	450Lux @ 0.5m (@5800K)
Power Consumption:	10W @ LED full power
Input Power Operation Voltage:	DC 5V 2.1A
LED Number:	5800K cool color 60 PCS 2600K warm color 60 PCS
Dimension:	dia 260mm x 15mm (without stand)
Weight:	217g (without stand)

Phottix Nuada Ring 60



The 19 inch(49cm) ring design of the Phottix Nuada Ring 60 LED is made up of 216 pieces of 5600K cool color LED beads and 216 pieces of 3200K warm color LED beads, with a total output of 48W.

It is the perfect light setup for photography, videography, Makeup Artists, livestream shooting and smartphone content creation.



Features


- Softlight design for 48W of flattering light
- Excellent color - CRI rating of 96+
- Easy Brightness and Color Temperature Control from front and rear
- USB 5V2.1A output for recharge smartphone
- Battery and AC adapter Modes
- 5 cold shoe mounts for smartphone, mic, etc
- Camera bracket easy for youtuber / live steaming

The Phottix Nuada Ring 60 includes a Light-weight collapsible light stand and a carry bag for easy travel and on-location setup.

The LED body has 5 cold-shoe mounts, which includes a camera Bracket and a smartphone clip. The back panel also has 1 x USB output which can provide power to a smartphone or a camera.



The Nuada Ring 60 runs on Two Sony-compatible NP-F750/960 batteries (not included), which makes it perfect for on-location work. An AC adapter is also included.

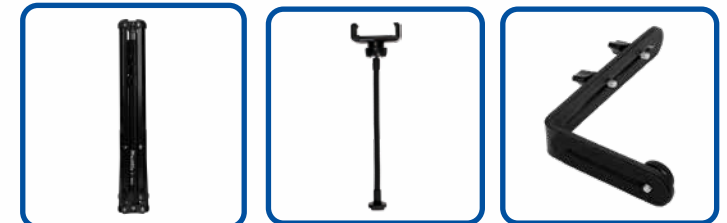

What's included

- Nuada Ring 60 LED Panel • Light stand • Camera Bracket • Smartphone clip
- AC Adapter • AC Power Cable • Carrying Bag
- 81461 Nuada Ring60 LED Light (EU)
- 81462 Nuada Ring60 LED Light (US)



Phottix M200R

RGB LIGHT
CRI 96+ RGB 21 MULTI-SCENE LIGHTING EFFECT HUE & SATURATION CONTROL COLOR TEMPERATURE CONTROL POWER CONTROL



HSI 0-360°
RGB FULL COLOR



81419 Phottix M200R RGB Light



CCT 3200K-5600K
COLOR TEMP CONTROL

5600K

3200K



21 MULTI-SCENE
LIGHTING EFFECT



Phottix M200R RGB Light Technical Specs:

Color temperature: 3200K - 5600K
Color model: 0-360° full color control (HSI)
Brightness range: 1% - 100%
Max. brightness / illuminance: 1200 Lux @ 0.5m (5600K)
Max. Power: 10W
Color rendering index: 96+
Battery Capacity: 3.7V 4000mAh
Charging / Input power: 5V 2A USB-C
External Output power: 5V 2A USB
Dimension: 151 x 80 x 11.5mm
Weight: 200g



POWER BANK
DC OUTPUT

4000 mAh
POWERBANK

*Product images are for reference only
and may differ from the actual product.



Lighting: Phottix M1000R RGB LED
Phottix M500R RGB LED
Photo: MDR Foto | Mdrfoto.com
Models: @pocketsize_cosplay
Location: @4825warehouse



18.5
W
MAX.
POWER

96
CRI
COLOR BULB

90
WARM
COLOR BULB

90
COLD
COLOR BULB



Phottix M500R
RGB LIGHT



Phottix M1000R
RGB LIGHT



24
W
MAX.
POWER

132
CRI
COLOR BULB

132
WARM
COLOR BULB

132
COLD
COLOR BULB

Features



RGB
MULTI COLORS



21
SCENARIO
EFFECTS



HSI



CCT



POWER
CONTROL



POWER BANK
DC OUTPUT

Excellent color rendering - CRI 96+ (TLCI 98+)

Full 0-360° color hue and saturation adjustment

21 present scenario effects

Adjustable brightness and color temperature

Use as a power bank to charge other devices

Compact size - 13.7mm thick (M500R / M1000R)

Long-life, Low-Heat LEDs

Long-Life Built-In Battery

Technical Specs

SKU / Model	81439 M1000R	81438 M500R	81419 M200R
Color temperature:	3200K - 5600K		
Color model:	0-360° full color control (HSI)		
Brightness range:	1% - 100%		
Max. brightness / illuminance:	3200Lux @ 0.5m (5600K) 750Lux @ 1m (5600K)	2000Lux @ 0.5m (5600K) 550Lux @ 1m (5600K)	1200 Lux @ 0.5m (5600K) 300Lux @ 1m (5600K)
Max. Power:	24W	18.5W	10W
Color rendering index:	CRI 96+ / TLCI 98+		
Battery Capacity:	3.7V 20000mAh	3.7V 10000mAh	3.7V 4000mAh
Battery Life: (with 100% power @ 5600K)	about 200min	about 120min	about 90min
Recharging power:	5V 3A USB-C	5V 2A USB-C	5V 2A USB-C
Recharge time:	about 8hrs (5V 2.4A)	about 8hrs (5V 2A)	about 4hrs (5V 2A)
External Output power:	5V 3A (Max) USB / USB-C*	5V 2A USB	5V 2A USB
Dimension:	280 x 180 x 13.7mm	200 x 121 x 13.7mm	151 x 80 x 11.5mm
Weight:	992g	508g	200g



1/4" threaded mounting
lug (Top, Bottom, Side)



User-friendly control knob



External Output power
Use as a power bank*



3200K - 5600K
Color Temperature



Full 0-360° Color Hue &
Saturation Adjustment



21 Present
Scenario Effects



1



2

What's included

1. Light stand adaptor use for handle grip
2. Light stand adaptor use with light stand

RGB LED Panel unit • USB-C recharge cable
Light stand adaptor • Pouch bag • User manual

MOBILE

RGB LED Family

Phottix

RGB LIGHT M100R

Wide Range Color Temperatures 2500K - 8000K

RGB MULTI-COLORS

CRI 96+

30 WARM COLOR BULB

30 COLD COLOR BULB

36 RGB COLOR BULB

6.5 W MAX. POWER

21 SCENARIO EFFECTS

HSI

CCT

POWER CONTROL

Features

0° 60° 120° 180° 240° 300° 360°

Features

- Excellent color rendering - CRI 96+ (TLCI 98+)
- Full 0-360° color hue and saturation adjustment
- 21 present scenario effects
- Wide range of color temperature 2500K – 8000K
- Pocket size – 110 x 61 x 11.5mm thick
- Adjustable brightness and color temperature
- Long-life, Low-Heat LEDs
- Long-Life Built-In Battery




What's included

M100R LED Panel unit • USB-C recharge cable • Cold shoe adaptor • Mini stand Smartphone Clip • Printed user manual • RGB round label

Technical Specs

SKU / Model	81439 M1000R	81438 M500R	81419 M200R	81418 M100R
Color temperature:	3200K - 5600K			2500K - 8000K
Color model:	0-360° full color control (HSI)			
Brightness range:	1% - 100%			
Max. brightness / illuminance:	3200Lux @ 0.5m (5600K) 750Lux @ 1m (5600K)	2000Lux @ 0.5m (5600K) 550Lux @ 1m (5600K)	1250 Lux @ 0.5m (5600K) 300Lux @ 1m (5600K)	600 Lux @ 0.5m (5600K) 160Lux @ 1m (5600K)
Max. Power:	24W	18.5W	10W	6.5W
Color rendering index:	CRI 96+ / TLCI 98+			
Battery Capacity:	3.7V 20000mAh	3.7V 10000mAh	3.7V 4000mAh	3.7V 1500mAh
Battery Life: (with 100% power @ 5600K)	about 200min	about 120min	about 90min	about 55min
Recharging power:	5V 3A USB-C	5V 2A USB-C	5V 2A USB-C	5V 1.3A USB-C
Recharge time:	about 8hrs (5V 2.4A)	about 8hrs (5V 2A)	about 4hrs (5V 2A)	about 2hrs (5V 1.3A)
External Output power:	5V 3A (Max) USB / USB-C	5V 2A USB	5V 2A USB	-
Dimension:	280 x 180 x 13.7mm	200 x 121 x 13.7mm	151 x 80 x 11.5mm	110 x 61 x 11.5mm
Weight:	992g	508g	200g	117g



TINY but POWERFUL

CRI 90+

50 COLD COLOR BULB

3.5 W MAX. POWER

Actual Size (1:1)

81401 Phottix M5 LED Light

Actual Size (1:1)




Features

- Tiny size - 72 x 41 x 10.5mm
- Light-weight - 44g
- 5 steps Brightness range
- Color temperature - 6600K (±500K)
- Monitor clip compatible for Notebook and Mobile Phone
- 1/4" screw mounting



How to mount the Notebook monitor clip

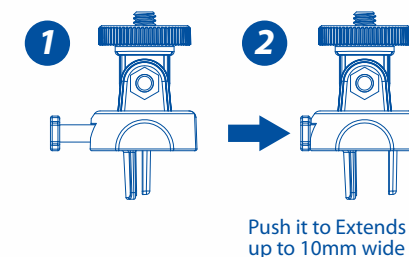

Technical Specs

Color temperature:	6600K (±500K)
Brightness range:	5 steps
Max. brightness / illuminance:	440 Lux @ 0.5m
Max. Power:	3.5W
Color rendering index:	90+
Battery Capacity:	3.7V 500mAh
Charging / Input power:	5V 500mA Micro USB
Dimension:	72 x 41 x 10.5mm
Weight:	44g

What's included

M5 LED Panel unit • Micro USB recharge cable • Cold shoe adaptor • Notebook monitor clip (installed on M5 unit)

Phottix PE98

Table LED



CRI 97




Your Study Lighting
Right Choice

PE98 Table LED Features

- CRI 97
- Reducing the effects of blue light
- Uses the latest in Flicker-Free LED technology
- 5 presets color temperature
- Brightness Control
- Wireless charger for smartphone
- USB power output
- Foldable lamp head

Why Need High Color Rendering Index (CRI)?

Color rendering index (CRI) demonstrates a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with an ideal or natural light source. Light sources with a higher CRI are more desirable to human eyes for comfort and vision protection.

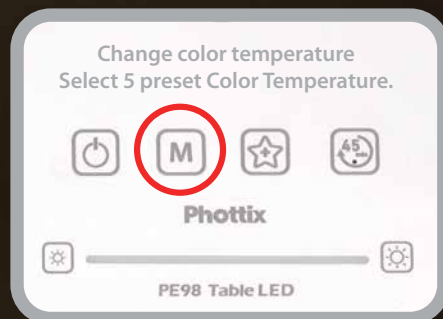

Specification

Color Rendering Index :	97
5 preset Color Temperature :	4000K > 3500K > 4500K > 3000K > 5500K
Max. Brightness :	800lm
Power Consumption :	24W
LED numbers :	48PCS LED
Wireless charger :	10W
USB power output :	5VDC 1A
AC / DC adaptor operation voltage :	100-240VAC
Unit size :	520 x 133 x 65mm
Weight :	1210g

What's included

PE98 Table LED Lamp • AC / DC adaptor • User manual
SKU: 81601 (EU) 81602 (US) 81603 (UK) 81604 (AU)



Live Stream series



99944 Phottix PC-60 4K Ultra HD Webcam

Phottix PC60

4K ULTRA HD WEBCAM



Features

4K UHD resolution 3840x2160p 30fps

Auto Focus

Auto Exposure

Auto White Balance

Build-in Microphone

Privacy Cover

USB plug & play no driver needed

360 Degree Rotation

Webcam Stand Included

1/4" thread Mount

Support Windows / Mac OS



Slide the lens Cover
Keep close for privacy



Forward & Backward Adjustment
of the webcam head



Build-in Microphone
for Voice Pickup



USB plug & play



1.4" threaded mount



Webcam Head
360 degrees rotatable

Technical Specs

PC60 4K Ultra HD Webcam

Resolution:	3840x2160 / 2592x1944 / 2160x1440 / 1920x1080 / 1280x720 / 640x480
Sensor:	1/3.2" with 8 Megapixel CMOS
Frame rate:	30fps
Field of view:	80 degrees
Focus:	Auto focus
Minimum focusing distance:	2mm
Microphone:	Omnidirectional
Connection:	USB 2.0
Video Encoding:	MJPEG
Systems support:	Windows XP SP2 / 7 / 8 / 10 / 11 or above; Mac OSx10.6 or above
USB cable length:	1.5m
Unit dimension:	90 x 56 x 54mm
Weight:	110g

Webcam Stand

Stand Base dia	114mm
Height: (only stand)	178mm - 252mm (Maximum)
Height: (webcam with stand)	220mm - 295mm (Maximum)
Weight:	310g

What's included

1. PC60 4K Ultra HD Webcam
2. Webcam Stand
3. Instruction Manual



Mount on laptop



Mount on monitor



Mount on Phottix AR35 boom arm stand
SKU 99930 (Sold Separate)



The MC20 Kits included cardioid microphone, MT-one smartphone tripod with an anti-fall wrist lanyard, which specially designs to improve the sound quality of smartphone or camera of the built-in microphones.

With both TRS cable and TRRS output cable included is compatible with Smartphones, cameras, camcorders, audio recorders, PCs, and other audio/video recording devices.



Features

Cardioid microphone with smartphone tripod

No batteries required for camera or smart phone

Support both TRS and TRRS system

Furry windshield and Sponge Mic muff for reduce the wind noise

Anti-shock mount reduce unwanted vibration and noise

Fast rotate switching between camera / selfie mode

Cold shoe & 1/4" screw mounting

The MC20 comes out in compact size and light-weight with rugged ABS structure, it will not be a heavy burden while shooting. Plug and play design, no need to worry about battery status.



Included an shock mount, which can effectively reduce unwanted vibration, cable and handling noise. Also included a furry windshield muff and Sponge Mic muff is designed to minimize the wind noise when recording in high wind conditions.


Live Stream series

Phottix MC20 Kit

Universal Cardioid




99918 Phottix MC-20 Kits

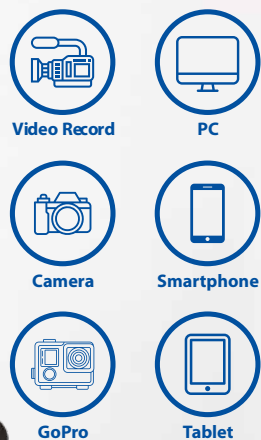

What's included



MC-20 Micphone • Shock mount • Sponge Mic muff • Furry windshield muff
TRS cable (for camera) • TRRS cable (for smartphone) • Storage pouch

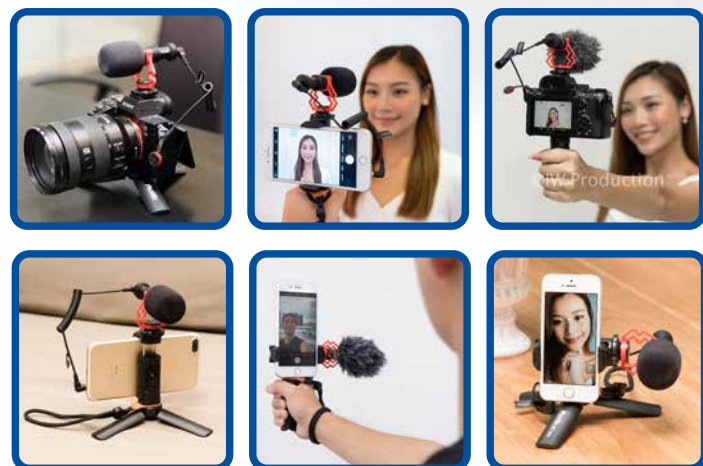

Technical Specs

Polar Pattern:	Cardioid
Frequency Response:	50Hz-20KHz
Sensitivity:	-34dB ±2dB (0dB = 1V / Pa @ 1kHz)
Signal to Noise Ratio:	>70dB
Maximum SPL:	110dB
Output impedance:	0.68K
Weight:	50g
Dimensions:	21x 88mm

Frequency Response

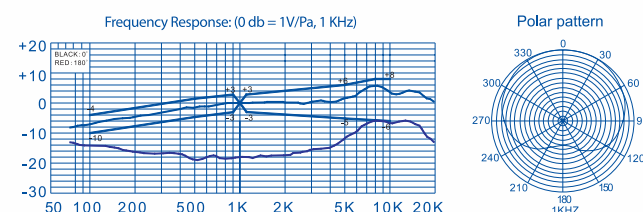

The Phottix MC-10 is an omnidirectional condenser lavalier microphone for wide range applications. The MC-10 is compatible with camera and smartphone.

It is designed for most recording devices with 3.5mm Jack TRS or TRRS microphone input, applied to video recording, live streaming, vloggers, podcasting, garageband, Interviews, online tutorial, video meeting and more.

Features

Superior audio quality

Plug and play no drivers needed for camera or smart phone

Support both TRS and TRRS system

Built-in noise reduction circuit

No batteries required



Adopts good-performance pickups with high sensitivity and wide frequency response, omnidirectional acoustic technology design and acoustic signals collection Performs significantly better than the majority of the built-in microphones.

Features with superior protection from interference ability, free windshield together and Built-in noise reduction circuit design to effectively suppress environmentally noise. Besides, the windscreen eliminates unwanted breath and wind noises. Camera / Phone function switching used for which device switch to the icon position.



NO BATTERIES REQUIRED with Plug and play will allow you to use whenever and wherever.

***For Apple lighting to 3.5mm adapter is NOT INCLUDED with MC-10**

Live Stream series

Phottix MC10

Omnidirectional Lavalier




99916 Phottix MC-10 lavalier microphone



Technical Specs

Element:	Back Electret Condenser
Polar Pattern:	Omni-Directional
Microphone Connector:	3.5mm (TRS / TRRS)
Frequency Response:	30Hz-20KHz
Sensitivity:	-32dB ±3dB (0dB = 1V / Pa @ 1kHz)
Equivalent noise level:	22dBA
Maximum SPL:	130dB
Output impedance:	2.2K

Frequency Response

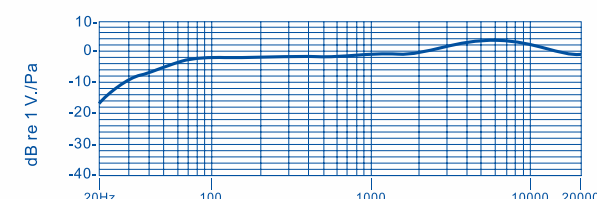



Features

Ideal for live stream, post-production keying and photography

Ultra-thin thick frames flat stand against a wall

4-color (green/blue and black/white)
1.5m x 4m Muslin background included


Quick to assemble

Collapses flat into a carry bag



The Q-drop is a 1.52m (5") width x 2.26m (7.4") height collapsible backdrop. The frame structure has an elastic cord that runs through it. It's complete can be assembled in minutes.

The flat stand and ultra-thin frame tube 27mm diameter to allow to be set up flat to lean against a wall. The chroma key blue / green screen just simply used the velcro straps posted on the fabric upright to the aluminum frame.



velcro straps mounting the fabric upright to the aluminum frame.



Technical Specs

Dimension	
Frame with background and backdrop Stand	2260mm x 1520mm x 2130mm
Frame without background and with backdrop Stand	2260mm x 1520mm x 360mm
Collapsed with carry bag	200mm(dia) x 1300mm
Frame tube diameter	27mm
Muslin background (Green/Blue & White/Black)	4000mm x 1500mm
Backdrop stand gasket	360mm x 77mmm

Weight

Total Package	6200g
Muslin background (Green/Blue + White/Black)	3200g
Backdrop frame + stand + stand gasket + stand screw	2500g
Carry Bag	500g




What's included

- Green / Blue Muslin background x 1
- Black / White Muslin background x 1
- Backdrop frame x 1
- Backdrop stand x 2
- Backdrop stand gasket x 2
- Backdrop stand screw x 2
- Carry bag x 1

Live Stream series

Phottix AR35 Boom Arm Stand

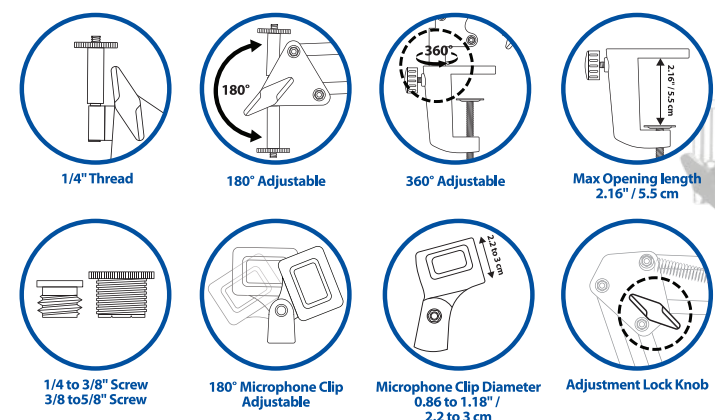

Phottix AR35 boom arm stand is designed for the mounting microphone, LED light and webcam which gears with 1/4" screw mount to a desk allowing for height and angles to be easily adjusted during recording, broadcasting, voice-over ASMR sound production and lighting up or video-graphing your work on the table.



The AR35 can be reached max. 74cm. It offers dual scissor arm extension springs so you can adjust the position how you like. Built-in 1/4" threaded screw which head rotated 180° as well as compatible camera and most shock mounts. The rugged steel arm with matt black coated that max. payload 1kg.



It includes ABS mic clip holder, table mounting clamp, 1pc of 3/8" to 5/8" screw and 1pc of 1/4 to 3/8" screw.



99930 Phottix AR35 Boom Arm Stand

Technical Specs

Maximum Height:	745mm (from table clamp to 1/4 thread)
Collapsed Dimension:	395mm x 120mm x 42mm (not included table clamp and accessories)
Weight:	353g (not included table clamp and accessories)
Loading:	1.5kg
Thread:	1/4" Thread

What's included

- AR35 Boom Arm Stand
- Table Mounting Clamp (max. 5.5cm)
- 3/8" to 5/8" Screw
- Mic Clip Holder (for mic dia 0.86" to 1.18")
- 1/4" to 3/8" Screw

Phottix® MT3 Mini Tripod 5-in-1 Kit Set

The MT3 mini tripod made of high-quality Metal legs solid construction. The non-slip rubber on the bottom of tripod legs ensures the stability.



Unique 5 in1 design, kit set included the Tripod MT-03 (1), ball head (2), Phone holder (3), GoPro adaptor (4), cold shoe (5) can be removed and installed on another tripod with 1/4" screws.

Extendable legs of tripod can be adjusted by pressing the button middle of leg. Working height from 13cm to 23cm. By rotating the 360° ball head, you can freely adjust the shooting angle you need. Folded height is only 24cm, 280g lightweight, allow Max Loading 2kg.

Height of Tripod only *



Footprint Diameters: 320mm, 260mm, 360mm

Standard 1/4" screw lock compatible with DSLR/mirrorless cameras, DV, action cameras, LED video lights, projector, webcam, GoPro devices, Hot shoe flash light, Smartphone and Microphone.



Pocketable design, foldable and portable, easy for storage, you can carry it anywhere. Perfect for travel. More such as for video recording, still photography, on-location shooting and live stream.




MT3 Mini Tripod 5-in-1 Kit Set

Technical Specs:

Closed Length:	24cm
Max Height:	23cm
Min Height:	13cm
Max Loading:	2kg
Weight:	280g

*Pictures are reference only

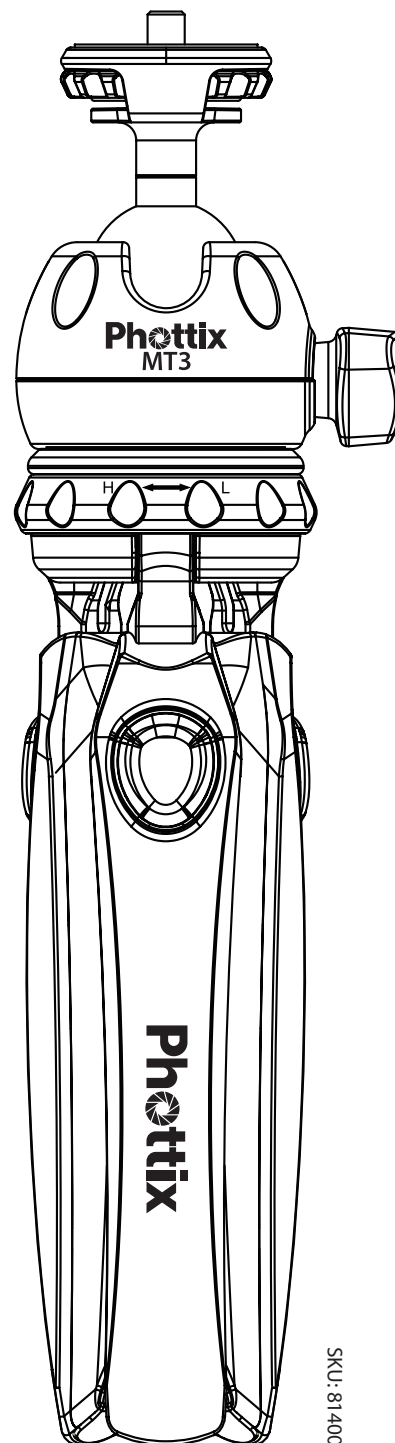

SKU: 81400

Phottix® MT-one SmartPhone Tripod Kit Set

Special Features:



Hemisphere
Tilt Head Design



360 Degree
Rotating




Fits Devices from
2.2 to 3.5"



Phone clip with
Cold Shoe Mount

Part of the Smartphone Holder

- Hemisphere tilt head design can adjust to tilt back angle
- 360 degree rotating phone holder for portrait mode (vertical) or landscape mode (horizontal) photo shoots
- Fits Devices from 2.2" to 3.5"
- Phone clip with cold shoe mount
- Universal 1/4" thread tripod mount
- Compatible with the most tripod and other accessories



Tripod stand
for Selfie Stick



Tripod stand
for Stabilizer




Pocketable Grip



Light-Weight
only 95g

Part of the Handheld Tripod

- Tripod stand for selfie Stick - tripod will turn to a comfy handle when you folding it together
- Tripod for stabilizer - can stand on the table or floor
- Multi-functional Tripod Use - flexible switch from tripod into handle, easy to be fold up or tear down for portable
- Pocket-size and Lightweights only 95g suitable for all kinds occasions like live streaming, traveling, interviewing etc.

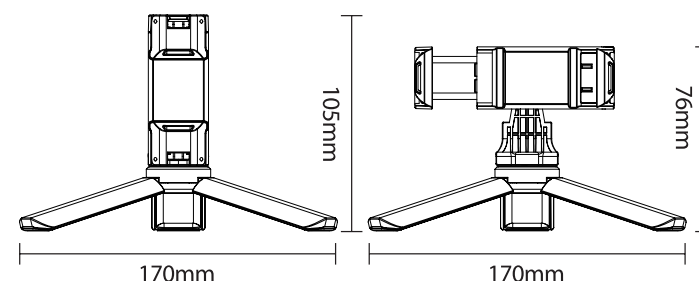


Tripod Stabilizer for
Vlogger and Live Streaming



Tripod Selfie Stick for
Interviewing and Live Streaming



99913 MT-one Smartphone Tripod Kit Set

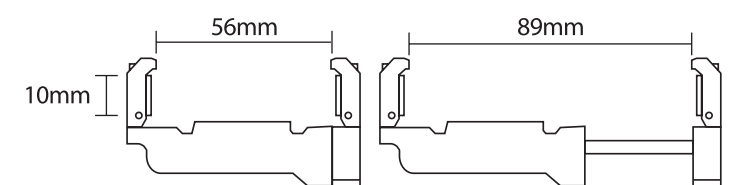



Phottix Odin Z Operating System

Lighting from A to Z

From day one, we have had several goals, the first being to make working with light as simple and easy as possible for photographers at every level.

To make things more simple, more intuitive, our team has invested two years in developing the next generation of the Phottix products. The key to this simplicity is the new Odin Z Operating System.

Odin Z keeps the most-loved Phottix features and adds cutting-edge options and technologies. Best of all, it's available to all Phottix users through a firmware upgrade. We believe in moving forward while leaving no one behind.

The Odin Z System features:



Auto-Metering



Auto-Switching




Real-Time Power Control

- Auto-Switching - Every TTL system is built into every product
- Auto-Metering - Phottix products will tell you what power level to set
- Real-Time Displays - Power levels displayed on products and triggers
- Simplified - Software and hardware protocols have been upgraded and streamlined for easier use

Phottix's technology has evolved and we want to ensure our customers can use this technology to evolve their skills and advanced their hobby or career. No matter how challenging the image they set out to create, working with Phottix gear should be anything but challenging.

From hobbyists to seasoned professionals Phottix provides lighting solutions from A to Z.

Phottix®

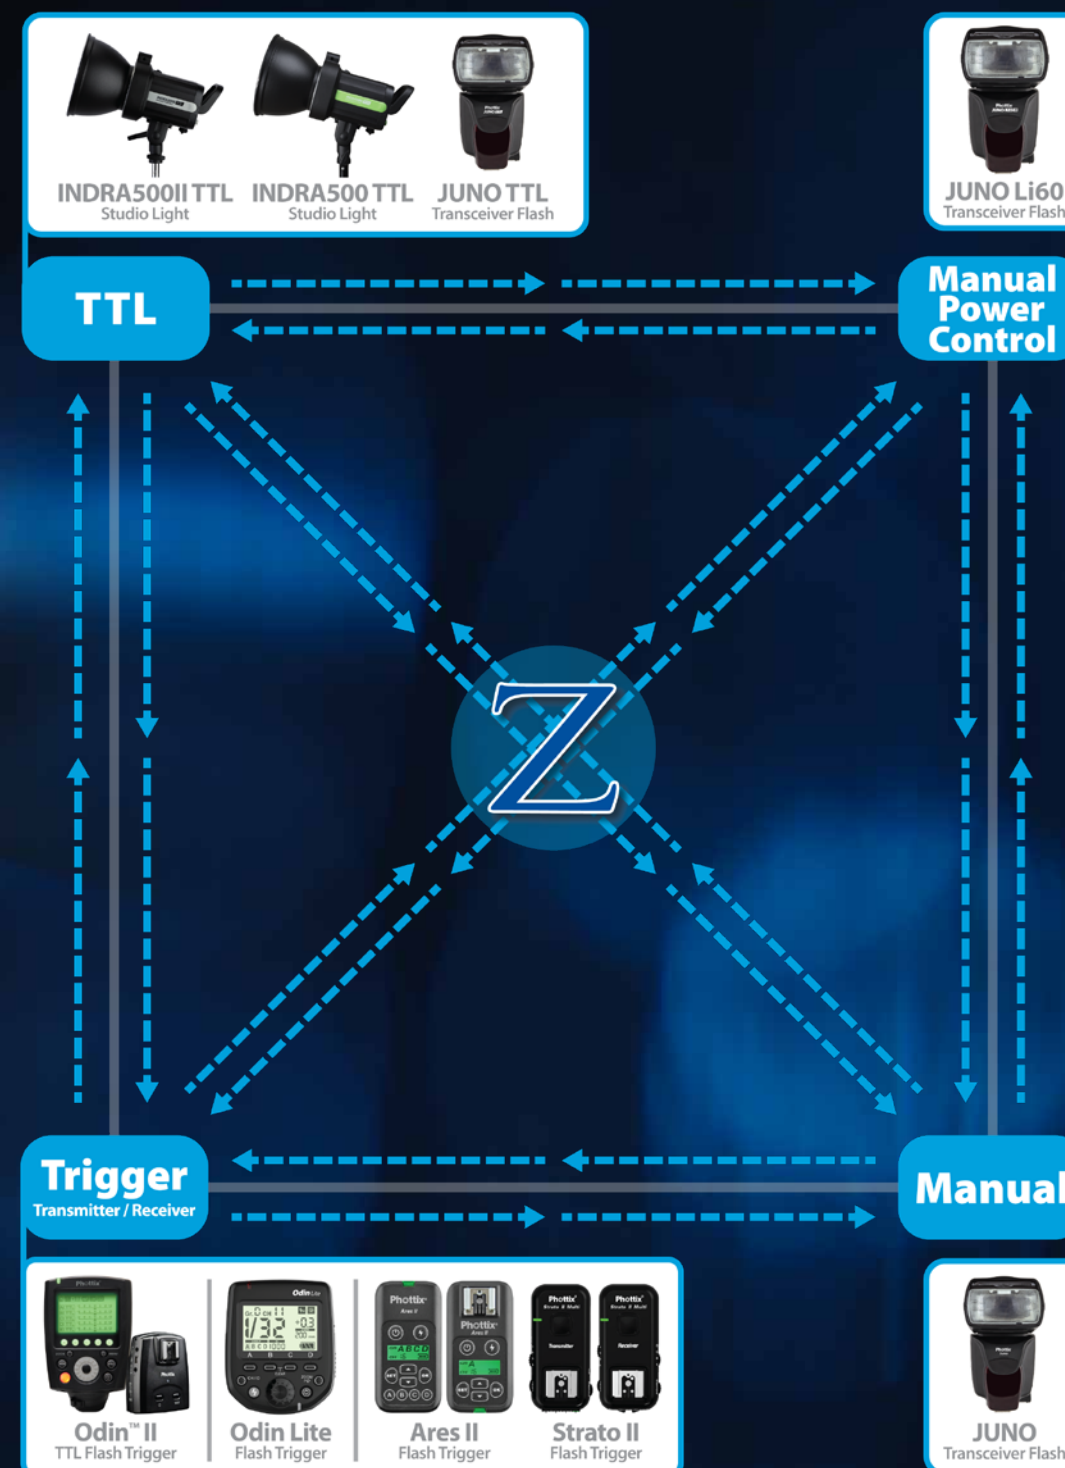



INDRA500II TTL

Studio Light

Powered by Odin Z



Phottix's landmark 500 Watt TTL Studio Light has been the "go-to" location and studio light for serious photographers. Phottix is proud to present the Phottix Indra500II TTL- the next generation featuring Odin Z OS functions.

The Phottix Indra500II TTL bring new features to the table:

- Improved battery technology. Get 500 full power shots per charge - a 20% increase over the original Indra500 TTL.
- Upgraded hardware
- Odin Z OS Built-in

SKU:00341 Phottix Indra500 II TTL Studio Light and Battery Pack Kit (EU&UK)
SKU:00342 Phottix Indra500 II TTL Studio Light and Battery Pack Kit USA
SKU:00343 Phottix Indra500 II TTL Studio Light and Battery Pack Kit AU
SKU:00344 Phottix Indra500 II TTL Studio Light and Battery Pack Kit TW
SKU: 00306 Phottix Indra500 TTL Studio Light and Battery Pack Kit (EU&UK)
SKU: 00307 Phottix Indra500 TTL Studio Light and Battery Pack Kit USA
SKU: 00309 Phottix Indra500 TTL Studio Light and Battery Pack Kit AU
SKU: 00303 Phottix Indra500 TTL Studio Light and Battery Pack Kit TW

With the Odin Z Operating System, the Indra500II TTL gets the same great feature set as other Phottix products including:

- All-in-one Auto Switching. TTL systems for Canon, Nikon, Sony and Pentax built-in. The Indra500II will automatically adjust to the system being used*
- Auto-Metering. Can be used on as a light meter*
- Real-time manual power display*



When used with the Phottix Odin II TTL Flash Trigger for Canon, Nikon, Sony or Pentax you have the ultimate in control. Eight stops of power adjustment - from full power to 1/128 in Manual Mode and +/- 3 EV in TTL mode, with High Speed Sync shutter speeds up to 1/8000s.


Manual only shooters can use the new Phottix Odin Lite to control the Indra500II TTL from any camera system. Perfect for photographers that switch between formats and systems.

* On compatible cameras, when used with the Odin II and Odin Z Operating System.



INDRA 500 LC

Powered by
Phottix Laso TTL
for Canon only



The Indra500LC gives photographers 500W/s of TTL power, opening up new possibilities and allowing photographers to shoot in shutter and aperture priority modes with incredible power.

In manual mode the Indra500LC offers 8 stops of power adjustments - from full power to 1/128 in 1/3rd stop increments. With Stroboscopic Mode, the Phottix Indra can be used for special effect and creative shooting with flash frequency of 1-100Hz and flash counts of 1-100 times.

The Phottix Indra500LC TTL has the power and control of the Canon RT and Phottix Laso triggering systems built-in. Switch between TTL and Manual modes, adjust EV and manual power levels and use high speed sync, all from the Canon ST-E3, compatible Canon RT Speedlites and the Phottix Laso Transmitter - no extra hardware is needed

SKU: 00336 Phottix Indra500LC TTL Studio Light and Battery Pack Kit (EU & UK)
SKU: 00337 Phottix Indra500LC TTL Studio Light and Battery Pack Kit (USA)
SKU: 00339 Phottix Indra500LC TTL Studio Light and Battery Pack Kit (AU)

Laso

Compatible with the
Phottix Indra500LC, Canon radio and non-radio
ETTL flashes



Laso Transmitter

The Phottix Laso Transmitter can control and trigger 5 groups (15 units) of Canon-compatible radio-enabled flashes. The Laso Transmitter can also control and trigger the Phottix Indra500LC Studio Light.



Features :

- 5 Groups: A, B, C, D, E* • 2.4 GHz frequency • 100m range
- 15 channels with Digital ID • AF Assist Light
- High Speed Sync-1/8000
- Controls and Triggers Canon-compatible radio-enabled flash
- Support Multiple Flash Modes and shooting approaches including E-TTL II/E-TTL, Manual, MULTI, Ext.A and Linked Shooting

SKU: 89091 Phottix Laso TTL Flash Trigger Receiver For Canon
SKU: 89092 Phottix Laso TTL Flash Trigger Transmitter For Canon



Odin™ II

TTL Flash Trigger Transmitter

Powered by Odin Z



The Phottix Odin II TTL Flash Trigger remains the world's best triggering system, boasting new features and technologies from the Phottix Odin Z Operating System.

Fast and easy to use, the Odin II now features auto-metering and auto-switching features when used with compatible Phottix products.

SKU: 89074 Phottix Odin™ II TTL Flash Trigger Transmitter For Canon
SKU: 89069 Phottix Odin™ II TTL Flash Trigger Transmitter For Nikon
SKU: 89079 Phottix Odin™ II TTL Flash Trigger Transmitter For Sony
SKU: 89080 Phottix Odin™ II TTL Flash Trigger Transmitter For Pentax
SKU: 89072 Phottix Odin™ II TTL Flash Trigger Receiver For Canon
SKU: 89067 Phottix Odin™ II TTL Flash Trigger Receiver For Nikon

Phottix Odin II Receivers are available separately for Canon and Nikon.

Receivers are not available for the Odin II for Sony or Pentax transmitters.

Features:

- 5 groups A, B, C, D, E, , 32 Channels
- Programmable Digital ID Code
- Group buttons and control dial for fast changes
- TTL Power Control +/- 3EV
- Manual Power Control 1/1 to 1/128
- High Speed Sync*, Second Curtain Sync (Nikon, Sony only)
- AF Assist Light
- Compatible with Phottix Odin Z Operating System.
- Controls compatible Phottix products in Manual and TTL modes.



Odin II TTL Flash Trigger Receiver



Odin II TTL Flash Trigger Transmitter



JUNO TTL

Transceiver Flash

Powered by Odin Z



The Juno TTL has everything you expect from a TTL hot shoe flash – a Guide Number of 60 with TTL, Manual and Stroboscopic modes, and an adjustable flash head that can zoom to 200mm.

Beyond hot shoe flash function, the Phottix Juno TTL Flash is a powerful partner for the professional photographer.

Features:

- All-in-one Auto-Switching. TTL systems for Canon, Nikon, Sony and Pentax built-in into every Juno TTL. The flash will automatically adjust to the system being used.*
- Auto-Metering. Can be used on or off camera as a light meter. The Juno TTL will tell you which power level to set.
- Real time manual power display*
- Can be used to control other compatible products in the Phottix ecosystem.

* When used compatible Phottix Odin II Transmitters

**Rx Mode compatible with Elinchrom EL-Skyport Transmitters: Transmitter PRO, Transmitter PLUS and Transmitter Speed



The Juno TTL is the perfect flash for wedding and event photographers that need flexibility of Auto-Switching for second shooters using a different camera system. Also great for educators in a classroom setting.

For those new to lighting, the Juno TTL Auto-Metering functions makes it super-easy to get started using flash.

Phottix JUNO TTL Transceiver Flash Tech Specs

Guide No:	GN60 at 200mm zoom
Wireless range:	not less than 100m
Wireless Mode:	OdinII Tx, OdinII Rx, AresII Rx, SKYPORT Rx, OP Tx, OP Rx, S1 Rx
Battery power:	AA (LR6) x 4
Recycling time:	@ Full power: <4sec
Rotation:	180 degree left and right ; Up, Down: -7 to 90 degree
Dimensions:	79 x 60 x 193mm
Weight:	430g (not include battery)

Pre-production specifications.

SKU: 80100 Phottix Juno TTL Transceiver Flash (For Canon)



Odin Lite Flash Trigger



The Odin Lite Flash Trigger is the latest in the Phottix line-up of flash triggers and provides a link between Phottix's TTL and Manual families of products.

The Phottix Odin Lite is an all-in-one manual trigger, giving users the ability to control compatible Phottix products from any camera system.

Features:

- Real-time remote power control and triggering with compatible Phottix lighting products*
- Works with any camera system
- 4 Groups and 32 channels

Using more than one camera system? Phottix has you covered. The Odin Lite allows photographers to control their lights from any camera.

Featuring 4 control groups, 32 channels and Phottix's Digital ID System, the Phottix Odin Lite is a cutting-edge solution for photographers using multiple systems in their workflow.

Odin Lite Flash Trigger Technical Specs:

Frequency:	2.4 GHz
Range:	100+m
Channels:	32 channels
Groups:	4 groups- A, B, C, D
Batteries:	2 x AA Alkaline batteries / 2 x NI-MH batteries
Max. sync speed:	Sync speed of your camera (Please refer to camera manual)
Dimension:	84.1 x 68.3 x 58.5 mm (L x W x H)
Weight:	115g without batteries

* with compatible Phottix lighting products

SKU: 89090 Phottix Odin Lite Flash Trigger Transmitter

Photo: Nikos Pekridis
Photopek.com

JUNO Li60

Transceiver Flash
Powered by Odin Z

Light all day and night



Odin Z OS



ARES II
Receiver



HSS
SUPPORT



LITHIUM
BATTERY



REMOTE
POWER-CONTROL

The new Juno Li60 Flash packs Professional power and super-fast recycle times in a manual flash.

With a 3200mAh li-ion battery, the Phottix Juno Li60 with serious power for serious professionals, super-charged with Phottix's new Odin Z Operating System.

Features:

- Long-lasting Lithium-Ion Battery
- Fast recycle times
- Pair with Phottix Odin Lite for the ultimate in manual control on any camera system
- Real time manual power display
- Compatible with other Phottix Ecosystem products*

* Built-in power control with Phottix Odin II or Odin Lite, triggering only with Phottix Ares II or Strato II Triggers



SKU: 80310 Phottix Juno Li60 Transceiver Flash

When paired with the Phottix Odin Lite controller, the Juno Li60 can be controlled and triggered from any camera system. Perfect for photographers shooting with different camera bodies, trigger with Odin II for HSS.

This Odin Lite and Li60 combo is the perfect travel companion for photographers on the road. Shoot all day and night and never worry about missing a shot. Power, Speed and Control – the busy location photographers new workhorse.

Juno Li60 Transceiver Flash Technical Specs:

Guide No:	GN60 at 200mm zoom
Wireless range:	not less than 100m
Wireless Mode:	OdinII TX, OdinII RX, AresII RX, S1/S2 RX
Battery power:	Li-ion battery 7.4V 3200mAh
Battery life:	Up to 800 cycles @ full power
Recycling time:	Up to 1.5 Seconds @ full power
Rotation:	180 degree left and right ; Up, Down: -7 to 90 degree
Dimensions:	79 x 60 x 193mm
Weight:	410g (not include battery)

Pre-production specifications.



Ares™ II
Flash Trigger

Odin Z OS STRATO II RECEIVER 16 CHANNELS 4 GROUPS 150 METERS RANGE

16 Channels of Awesomeness

Phottix's budget-friendly flash trigger system – the Phottix Ares II, boasts the latest technology and is perfect for manual shooting with studio lights or hot shoe flashes.

Features:

- Transmitter and Receiver with LCD display
- 16 Channels (Strato II compatibility on channels 1-4)
- 4 Groups, A-D
- User programmable Digital ID Code
- Compatible with other Phottix products*

SKU: 89550 Phottix Ares II Flash Trigger Set
SKU: 89552 Phottix Ares II Flash Trigger Transmitter
SKU: 89553 Phottix Ares II Flash Trigger Receiver



Ares II Flash Trigger Transmitter



Ares II Flash Trigger Receiver



Juno Transceiver Flash



Your new favorite "old school" chum

Phottix has spent a lot of time focused on being cutting-edge with the newest and most innovative technologies. We focused this innovative mindset on a powerful yet easy-to-use manual hot shoe flash.

The result: The Phottix Juno.

Features:

- GN 58 Manual Hot Shoe Flash
- Adjustable over 8 stops, in 1/3 stop increments
- Compatible with most major camera systems
- Built-in Phottix Ares II Transmitter and Receiver
- 1/4" x20 Mounting Lug

SKU: 80363 Phottix Juno Transceiver Flash SKU: 80365 Phottix Juno Ares II Combo
SKU: 80364 Phottix Juno "Ready to Go" Kit SKU: 80366 Phottix Juno Ares II Double Pack



Phottix®

8 SIZES and STYLES

G-Capsule

MultiFunction EZ-Up MODIFIER
with Magnetic Gel Filter Set

FEATURES

- The world's first all-in-one panorama softbox
- 8 sizes and styles
- Shoot-through umbrella combined with softbox and grid allows for many uses
- Integrated Magnetic Gel Filter Holder with 4 Color Gel Filter
- Uses Phottix's Heat resistant SL Tech material
- "ONE Push Release" Unlock Button for easy take-down
- 4 / 16 Fiberglass Ribs with white interior
- Swappable speed rings for popular lighting brands
- Supports speedlites, strobes, monolights, continuous lights and LEDs
- Travel Bag included

What is "G"



The innovative and patented gel filter holder fitted out with magnetic mechanism at both sides allows the change of color gel filter in seconds. Use the gels to create a special mood at your shooting set up.

Innovation never stops. Following the success of the worldwide popular Raja softbox, Phottix is proud to announce the new series G-Capsule Multifunction EZ-up modifiers.

G-Capsule series is the world's first All-in-One panorama light softbox with patents that featuress four modes: Softbox, Grid, Beauty Dish and Lantern.




The G-Capsule series has black exterior, white interior surface, 4 and 16 fiberglass ribs structure. The fiberglass ribs are light yet robust and durable, and can be easily folded to save on storage space. The softbox comes with a carrying bag.

The G-Capsule series comes in eight sizes, and shapes such as parabolic deep, rectangular strip, and round-shaped. It is equipped with a popular Bowens Mount that is compatible with all-time popular Bowens-type mount accessories for Strobe, Flash or LED lights. Swappable mount for Elinchrom and Profoto are available too and sold separately.

How to used lantern mode?

Shoot-Through Umbrella and softbox can be easily combined with Velcro on the edges of both, you can also use them separately for other light shaping purposes.

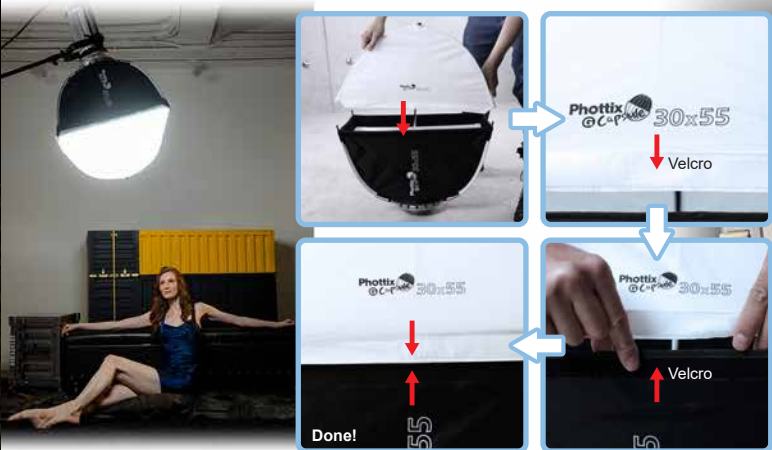

"ONE Push Release" Unlock Button system

Strengthened Unlock Button system, most Innovative "ONE Push Release" folds up Unlock Button – easy folding set up non-assemble design let you save disassemble time and improve shooting efficiency.



1 Phottix G-Capsule Deep Softbox

40cm (16") - SKU 83720

Specifications:

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 400mm x 660mm
Unfold Dimension (Softbox):	dia 400mm x 410mm
Unfold Dimension (Umbrella):	dia 400mm x 250mm
Collapsed Dimension (Softbox):	dia 180mm x 440mm
Collapsed Dimension (Umbrella):	370mm x 170mm x 80mm
Weight:	
Softbox with Bowens mount:	1,135g
Umbrella:	346g
Softbox with Bowens mount + Umbrella:	1,481g

2 Phottix G-Capsule Deep Softbox

85cm (33") - SKU 83724

Specifications:

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 850mm x 940mm
Unfold Dimension (Softbox):	dia 850mm x 560mm
Unfold Dimension (Umbrella):	dia 850mm x 380mm
Collapsed Dimension (Softbox):	dia 180mm x 720mm
Collapsed Dimension (Umbrella):	610mm x 290mm x 120mm
Weight:	
Softbox with Bowens mount:	1,570g
Umbrella:	491g
Softbox with Bowens mount + Umbrella:	2,061g

3 Phottix G-Capsule Softbox

65cm (26") - SKU 83721

Specifications:

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 650mm x 690mm
Unfold Dimension (Softbox):	dia 650mm x 340mm
Unfold Dimension (Umbrella):	dia 650mm x 350mm
Collapsed Dimension (Softbox):	dia 180mm x 460mm
Collapsed Dimension (Umbrella):	530mm x 220mm x 100mm
Weight:	
Softbox with Bowens mount:	1,156g
Umbrella:	438g
Softbox with Bowens mount + Umbrella:	1,594g

4 Phottix G-Capsule Softbox

85cm (33") - SKU 83722

Specifications:

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 850mm x 740mm
Unfold Dimension (Softbox):	dia 850mm x 380mm
Unfold Dimension (Umbrella):	dia 850mm x 360mm
Collapsed Dimension (Softbox):	dia 180mm x 560mm
Collapsed Dimension (Umbrella):	610mm x 280mm x 120mm
Weight:	
Softbox with Bowens mount:	1,344g
Umbrella:	505g
Softbox with Bowens mount + Umbrella:	1,849g

5 Phottix G-Capsule Softbox

105cm (41") - SKU 83723

Specifications:

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 1050mm x 900mm
Unfold Dimension (Softbox):	dia 1050mm x 460mm
Unfold Dimension (Umbrella):	dia 1050mm x 440mm
Collapsed Dimension (Softbox):	dia 180mm x 650mm
Collapsed Dimension (Umbrella):	700mm x 300mm x 120mm
Weight:	
Softbox with Bowens mount:	1,589g
Umbrella:	642g
Softbox with Bowens mount + Umbrella:	2,231g

6 Phottix G-Capsule Softbox

30x55cm (12"x22") - SKU 83725

Specifications:

Shape:	Rectangular
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	300mm x 550mm x 660mm
Unfold Dimension (Softbox):	300mm x 550mm x 370mm
Unfold Dimension (Umbrella):	300mm x 550mm x 290mm
Collapsed Dimension (Softbox):	dia 180mm x 470mm
Collapsed Dimension (Umbrella):	440mm x 150mm x 80mm
Weight:	
Softbox with Bowens mount:	824g
Umbrella:	262g
Softbox with Bowens mount + Umbrella:	1,086g

7 Phottix G-Capsule Softbox

60x90cm (24"x35") - SKU 83726

Specifications:

Shape:	Rectangular
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	600mm x 900mm x 980mm
Unfold Dimension (Softbox):	600mm x 900mm x 520mm
Unfold Dimension (Umbrella):	600mm x 900mm x 460mm
Collapsed Dimension (Softbox):	dia 180mm x 700mm
Collapsed Dimension (Umbrella):	840mm x 160mm x 70mm
Weight:	
Softbox with Bowens mount:	1,114g
Umbrella:	386g
Softbox with Bowens mount + Umbrella:	1500g

8 Phottix G-Capsule Softbox

30x140cm (12"x55") - SKU 83727

Specifications:

Shape:	Strip
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	300mm x 1400mm x 940mm
Unfold Dimension (Softbox):	300mm x 1400mm x 550mm
Unfold Dimension (Umbrella):	300mm x 1400mm x 390mm
Collapsed Dimension (Softbox):	dia 180mm x 890mm
Collapsed Dimension (Umbrella):	840mm x 140mm x 120mm
Weight:	
Softbox with Bowens mount:	1,268g
Umbrella:	495g
Softbox with Bowens mount + Umbrella:	1,763g

What's Included

Phottix G-Capsule Softbox • Phottix G-Capsule Shoot-Through Umbrellas • S-mount • Inner baffle (Reflective) • Inner baffle (Shoot-Through) Outer diffuser • Fabric grid • Gel Filter Holder • 4 Color Gel Filter : Red, Yellow, Green, Blue • Carrying bag



Raja Quick-Folding Softbox

The Phottix Raja series opens simple like an umbrella and is ready to use in seconds. Pop it open, add the baffle, diffuser and grid – mount on your studio light, you're ready to shoot.

The Phottix Raja / Raja Deep series features:

- Heavy-duty construction
- Uses Phottix's Heat resistant SL Tech material
- Easy to assemble
- 12 sizes and styles
- Swapable speed rings for popular lighting brands
- Travel Bag included



Raja Deep Quick-Folding Softbox

Why Deep?

Deep Softboxes are loved by professional photographers - and for good reason: They produce a more directional light with greater contrast than traditional softboxes – with more even illumination. They are versatile – offering different looks by adding or subtracting the baffle and or diffuser.

Phottix Speed Ring Inserts for Raja Series

82584 Phottix Speed Ring - Inner Ring For Elinchrom (144mm)
82585 Phottix Speed Ring - Inner Ring For Balcar (144mm)
82588 Phottix Speed Ring - Inner Ring For Profoto (144mm)

12 sizes and styles of Phottix Raja Softboxes Models

- | | |
|-------------------------------|---|
| 1.) 82723 Raja Deep 60cm(24") | 7.) 82727 Raja 150cm(59") |
| 2.) 82724 Raja Deep 80cm(32") | 8.) 82720 Raja 60x90cm (24"x35")* |
| 3.) 82721 Raja 65cm (26") | 9.) 82726 Raja 80x120cm (32"x47")* |
| 4.) 82728 Raja 85cm (33") | 10.) 82731 Raja Oval 50x120cm(20"x47") |
| 5.) 82722 Raja 105cm (41") | 11.) 82733 Raja Mouse 60x120cm(24"x47") |
| 6.) 82729 Raja 120cm (47") | 12.) 82725 Raja Strip 30x140cm (12"x55")* |

Licensed under U.S. Patent No. 6,733,145

What's included

Phottix Raja / Raja Deep Quick-Folding Softbox • Metal Disk (*Not Included)
S-mount • Inner baffle • Outer diffuser • Carrying bag
Fabric grid (Raja 120 and 150 NOT included*)

Premio


Parabolic Umbrellas Series

The Premio Series feature innovative enhancements, making them both a durable and premium "go-to" lighting modifier.

The umbrellas feature heavy-duty construction, made with fiberglass spokes for cleaner catch-lights and enhanced durability - that will stand up to the rigors of on-location work. The locking mechanism has been redesigned, making it stronger and easier-to-use.

White diffusers are available for the Phottix Premio Reflective models - easily turning them into a large softbox. A black, reflective backing is available for the shoot-through models - helping to better control light spill, as well as putting more light on target.

Phottix Premio Shoot-Through Umbrella Series

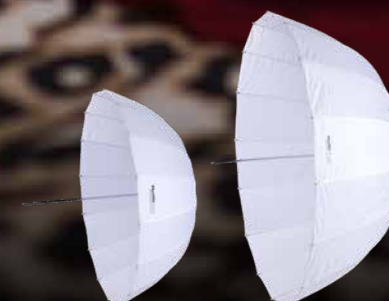


SKU: 85382 Phottix Premio Shoot-Through Umbrella (85cm/33")
SKU: 85383 Phottix Premio Shoot-Through Umbrella (120cm/47")

Phottix Premio Black Backing for Shoot-Through Umbrellas



SKU: 85385 Phottix Premio Black Backing (for 85cm/33")
SKU: 85386 Phottix Premio Black Backing (for 120cm/47")

Phottix Premio Reflective Umbrella Series

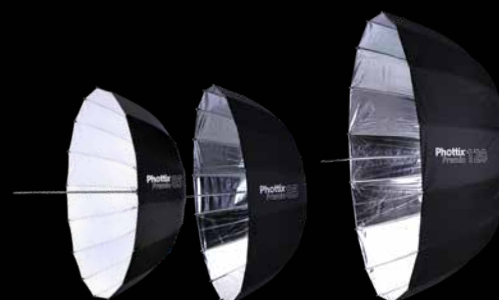

SKU: 85372 Phottix Premio Reflective Umbrella (85cm/33") - Silver and Black
SKU: 85373 Phottix Premio Reflective Umbrella (120cm/47") - Silver and Black
SKU: 85377 Phottix Premio Reflective Umbrella (85cm/33") - White and Black

Phottix Premio Diffuser for Reflective Umbrella



SKU: 85375 Phottix Premio Diffuser (for 85cm/33" Reflective Umbrella)
SKU: 85376 Phottix Premio Diffuser (for 120cm/47" Reflective Umbrella)

Umbrellas Series



Two Layers Detachable Reflective/Shoot-through Umbrella

The best of both worlds. This white shoot-through umbrella has a black cover that turns it into black/white reflective umbrella. Two very different effects from one umbrella.

SKU: 85420 101cm (40")



Reflective Studio Umbrella

It is black outside and silver inside, producing beautiful light with more contrast than a white umbrella.

SKU: 85330 84cm (33")
SKU: 85340 101cm (40")



Double-Small Folding Reflective Umbrella

Super-compact double-folding reflective umbrella—perfect for the on-the-go photographer. Black exterior, silver interior.

SKU: 85341 91cm (36")



Reflective Studio Umbrella

Black Exterior, white interior for softer light.

SKU: 85370 101cm (40")



Double-Small Folding Shoot-Through Umbrella

Super-compact double-folding shoot-through Umbrella – perfect for the on-the-go photographer. White exterior, interior.

SKU: 85361 91cm (36")



White Photo Studio Diffuser Umbrella

White exterior and interior - the essential standard studio umbrella.

SKU: 85350 84cm (33")
SKU: 85360 101cm (40")



Shoot-Through Softbox Studio Umbrella

A shoot-through umbrellas with an attached black backing. Limit light spills and more efficient light use.

SKU: 85380 101cm (40")



Reflective Softbox Studio Umbrella

An easy to use umbrella softbox. This umbrella opens into a 101cm circular softbox. Easy to transport and store.

SKU: 85390 101cm (40")

Studio Pro

Light Stand / Boom Stand Series


Made of advanced stainless steel, firm and durable, suitable for professional studios, advertising agencies, television and film crew.

Studio Pro


Light Stand / Boom Stand Series

Introducing the new Phottix Studio Pro Light Stand & Boom Stand series to better serve the expanding filmmaking and studio photography industries all of the Phottix Studio Pro products are heavy-duty and ready to serve the needs and demands of serious professionals.

All products were created with feedback from international creative professionals. Like all Phottix products, the Studio Pro series offers dependable and affordable solutions.

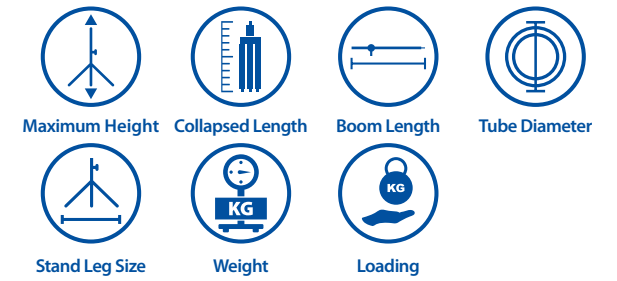


Studio Pro series features

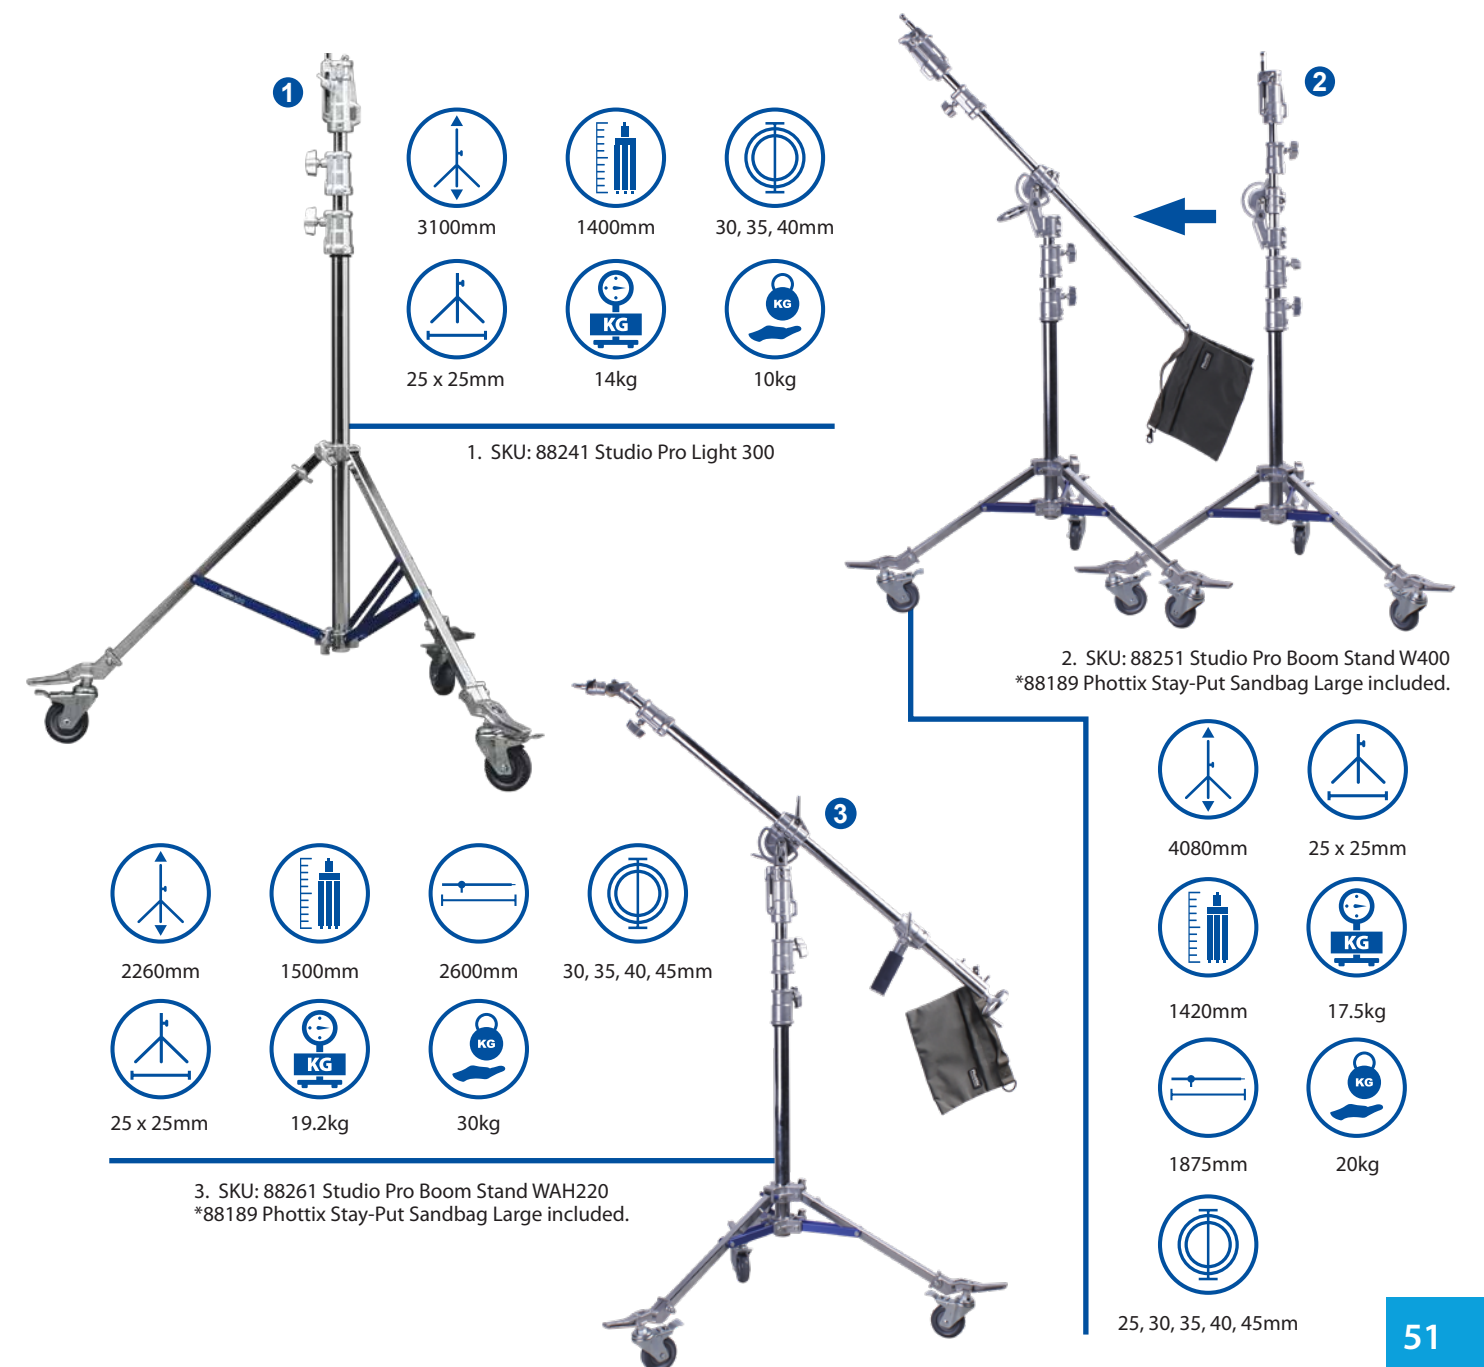



Padat Carbon 198

Carbon Fiber Compact Light Stand



The Phottix Padat Carbon Fiber Compact Light Stand (198cm/78") is the world's lightest light stand weighing in at a remarkable 596 grams*! When collapsed, the 19-inch Padat Carbon 198 Light Stand fits in any carry-on luggage or gear bag.


While compact, the Phottix Padat Carbon Fiber rises to any occasion, extending to 6.5 feet when fully extended, topped with a 1.4" threaded mount.

The flat-folding Phottix Padat Carbon Fiber is perfect to location and traveling photographers. It folds flat making it easy to pack and its weight barely making a dent in your luggage allowance.

Padat 198 features:

- Light-weighs in a 600g - the same as a bottle of water.
- Packs Flat
- Great for location work
- Perfect for hot shoe flashes

88218 Phottix Padat Carbon Fiber Compact Light Stand (198cm/78")*
Patent Number: ZL 201730228322.6



1980mm



495mm x 66mm x 38mm



490-495mm



1.5kg



596g*



Padat 300

Compact Light Stand

Phottix Padat Compact Light Stand (300cm/118") featuring an innovative Fast Assembly Mortise Module (FAMM), the stand can be bought together or separately. Connect them according to your needs for a made-to-measure piece of equipment; an innovative space-saving feature.

Practical as well as clever, its compact design easily fits into your bag so you'll always be ready for those demanding outdoor shoots. Slot everything neatly into a more compact case to keep things neat at the studio.

Padat 300 features:

- Extends to 3m
- Space-Saving design of FAMM can slot together for complete portability
- Flat foot base reduce environmental limitations by setting the light source
- Air cushion design protects gear and fingers



Padat 300 FAMM - Middle Lock




Padat 300 FAMM - Leg Lock



Fast Assembly mortise module
Middle Lock


88217 Phottix Padat Compact Light Stand (300cm/118")



3000mm



800 mm x 80 mm x 70 mm



880mm



5kg



2100g



Phottix®
Saldo

Photo: Krish Nagar
ig@krishnagarphotography

Saldo


Light Stand Series

Unique a Head-Turning Two-Tone
Chrome and Black look




Saldo Light Stands Series

Featuring a head-turning two-tone chrome and black look. The Saldo series offer the same great durability and affordability that have become Phottix trademarks.




SKU: 88208
Saldo 62 Light Stand (62cm/24")

1




SKU: 88207
Saldo 200 Compact Light Stand (200cm/79")

2




SKU: 88209
Saldo 240 Light Stand (240cm/94")

3




SKU: 88211
Saldo 280 Air Cushion Light Stand (280cm/110")

4



*Sandbag included
SKU: 88221
Saldo Studio Boom Light Stand (395cm/156")

5



*Sandbag included
SKU: 88197
Saldo 160 Light Stand Boom Arm (160cm/63")

6



7

SKU: 83431
Saldo Backdrop Stand Kit (2.8x3.2m)
• Support muslin and paper backdrop up to 3m wide
• 2 x Saldo 280 Air Cushion Light Stand (280cm/110")
• Comes with carrying Bag
• 4 sections removable horizontal bar (80cm each)



Phottix®

F-180 Light Stand (H/180cm/71")



The Phottix F-180 Light Stand (H/180cm/71") may be the world's shortest light stand height at 46cm when collapsed, easily transported from one location to another, adjustable for many lighting situations.

While compact, It is designed with reverse fold back structure design for simple storage and transport, at making it easy to pack and its weight barely making a dent in your luggage allowance. Quick Release Flip-Locks saving much of your time for your lighting setup best than twist-lock type.




Quick Release Flip-Locks



Reverse fold Design

F-180 is extending to 5.9 feet when fully extended, topped with a 1.4" threaded mount widely used as a support system for most of photographic equipment such as different lights of strobe/flash light and light-weight LED light (Nuada Ring 60, Nuada S/P, Kali150, M180, M200R).

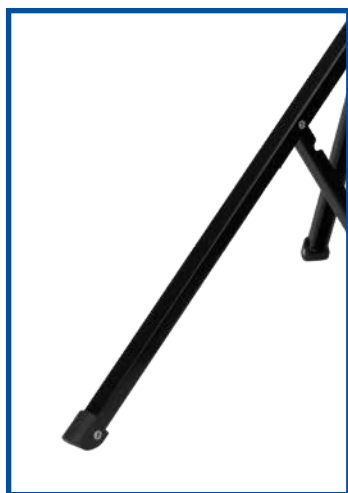

99911 Phottix F-180 Light Stand (H/180cm/71")

Phottix®

F-160 Light Stand (H/155cm/61")

Phottix F-160 Light Stand (H/155cm/61") is the ideal solution for the user looking for a baby lightweight and quick setup. This is extendable height from min. 46.5cm/18.3" to max.155cm/61" closed length 46.5cm for storage and lightweight 555grams. The compact design makes it portable to carry around. It is five column sections and quick release flip-lock that easy to set up in seconds.

Features

Top Of The Light Stand With Multi Angle Adjustment

- Vertical 360 Adjustment Knob
- Horizontal 180 Degree Angle Adjustable

Compact And Shortest Collapsed Height 46.5cm

Light-weight 555g Only

Quick Release Flip-locks

Vertical 360 Degree Rotatable Via Adjustment Knob



Flexible head with 1/4" screw provide vertical 360 degree rotation via Adjustment knob and horizontal 180-degree rotation angle for the smartphone to get different best shooting position. It comes with a universal phone clamp with cold shoe mount and packing bag.



Horizontal 180 Degree Angle Adjustable



The phone clamp (packing included) is spring-loaded and extends up to 4" wide, it is compatible with almost all smartphones with or without a case.



Good match with Phottix lightings and microphone like Nuada Ring 10, Nuada S/P, M180 or M200R for live streaming, selfie photos, video recording, tutorial video, vlogging etc...

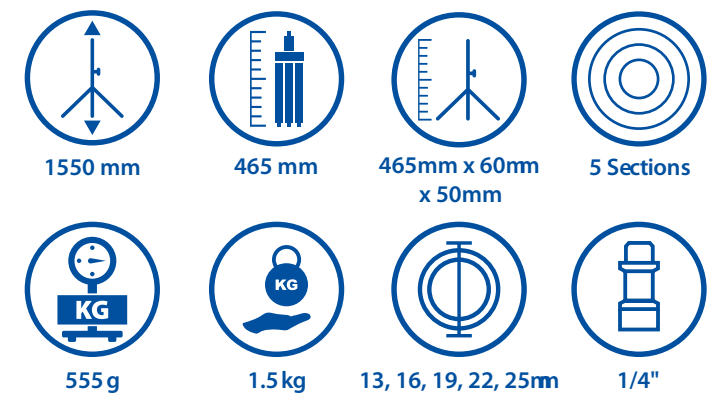

Quick Release Flip-locks



99905 Phottix F-160 Light Stand (H/155cm/61")



Features

- Rugged and durable Die-cast steel tube
- Frosting technology of light stand tube surface
- The top of the three-pronged design of the light stand, it is firmly locked with the extra large screw and the light stand legs to provides more stable loading
- Base of the light stand adopts a sturdy load-bearing structure
- Stylish and streamlined corner design
- Engineering grade plastic material knob light stand section lock
- Each part of the light stand adopts galvanized thickened screws to effectively prevent rust
- There is an anti-collision soft rubber ring between the tube sections of the light stand, which acts as a buffer when the tube suddenly drops when unlocked, and protects the lamp holder and photographic equipment.

Technical Specs:

Extended height	2,000mm (PX-200, PX-200W) 2,800mm (PX-280W)
Collapsed height	700mm (PX-200, PX-200W) 950mm (PX-280W)
Sections	3
Tube diameters	25.4, 22.2, 19, 16 mm (PX-200, PX-200W) 31.7, 28.6, 25.4, 22.4 mm (PX-280W)
Footprint diameters	770mm (PX-200, PX-200W) 1,200mm (PX-280W)
Weight	1 kg (PX-200, PX-200W) / 2 kg (PX-280W)
Supports	5 kg (PX-200, PX-200W) / 15 kg (PX-280W)
Thread	1/4" Thread (PX-200, PX-200W, PX-280W)
Color	White (PX-200W, PX-280W), Black (PX-200)



MT5 Light Stand Adapter Ball Head Kit Specification

Light Stand Adapter		Ball Head	
Upper screw :	1/4 inch	Swivel head :	360°Rotation 90° Tilting Rotating
Upper diameter :	44mm	Upper screw :	1/4 inch
Bottom diameter :	26mm	Bottom thread :	1/4 inch
Bottom Inner diameter :	16mm	Height :	74mm
Height :	51mm	Weight :	110g
Weight :	85g		

What's included

- Ball head
- Smartphone Clip
- Light Stand adaptor
- Cold shoe



Photo: Ali G
Aligstudios.com



Varos Pro

Multi-Function Flash Shoe Umbrella Holder

The Varos Pro series is 300% stronger than previous versions and features Aluminum alloy body with a metal coldshoe, 3/8" and 1/4" female threaded insert, male 3/8" and 1/4"s crews included.

The Teardrop-shaped umbrella mount accepts umbrella with shafts 7-10mm and the 8 degrees slanted umbrella mount allows more light to hit the center of the umbrella. The Patented umbrella clamp has been redesigned to offer 300% more locking force while keeping umbrella shafts more secure and damage free.



The Phottix Varos Pro Family Technical Specs:

Model:	S	M	BG
SKUs:	87200	87199	87198
Material:	Aluminum alloy body with metal flash cold shoe		
Mount:	Metal cold shoe 5/8" (16 mm) with 3/8"-16 and 1/4"-20" threaded female insert 5/8" (16 mm) with 3/8"-16 and 1/4"-20" threaded male insert		
Load Capacity:	25 kg (55 lb)	28 kg (62 lb)	30 kg (66 lb)

SKU: 87200 Varos Pro S Multi-Function Flash Shoe Umbrella Holder
SKU: 87199 Varos Pro M Multi-Function Flash Shoe Umbrella Holder
SKU: 87198 Varos Pro BG Multi-Function Flash Shoe Umbrella Holder

Phottix®
Phottix.com



PhottixPPA @phottixjournal @Phottix PhottixHQ

Unit 1 & 13, 8/F., Block B, Hoi Luen Ind. Centre, 55 Hoi Yuen Rd, Kwun Tong, Kln, Hong Kong, China.
Tel: +852 2575 0739 | Fax: +852 2572 8207 Sales@phottix.com | Tech@phottix.com