



**Phottix®**  
**broffix®**



We are living in an extreme age of content creation and sharing.

Around the world, millions of photographers, videographers, content creators, and livestreamers are all creating a huge variety of content while doing everything they can to get their work noticed.

On top of that, millions more people are now working and studying at home with videoconferences becoming the de-facto way for people in business and in school to communicate.

Being seen, heard and noticed has become increasingly challenging as billions of new creations are shared each day.

That's where we come in.

At Phottix, we believe that **"creators"** should spend much less time worrying about or figuring out their gear, and much more time being creative with their gear.

**We believe gear shouldn't get in the way. It should clear the way.**

We believe that the creative process shouldn't be a process; at least when it comes to your gear.

The present times are challenging. SO, we have challenged ourselves to expand to meet the changing needs of our diverse community of Creators with gear that is adaptable, affordable and ultimately, makes it easier to create whatever it is they need to create. With over 40 patents, numerous awards and a team of passionate engineers and designers, we offer a range of LEDs, Studio Lights, Shoe-Mount Flashes, Softboxes, Light Stands, and Wireless Remotes.

Our commitment is simple:  
no matter what story you want to tell, you'll have the right gear at hand.







## Phottix Academy


Established for promotes photography arts and culture in Hong Kong, Over 1,000 sq ft, our studio is equipped with professional shooting equipment, Suitable for product shoots, high-end portraits, pets, fashions, commercials, chroma key and videos etc.

We also can be set flexibly change to a workshop space, events or lecture format functions.

We are provide comprehensive support for All community groups and organizations, artists and tutors.

### FULLY EQUIPPED

- Phottix professional flash and LED lighting system
- 18 plus 3m wide background colors
- Independent dressing room
- Separate toilet
- Spacious reception room
- 65-inch ultra HD LED TV
- Free Wi-Fi
- Wireless microphone and audio system
- Podium
- Projector and projection screen

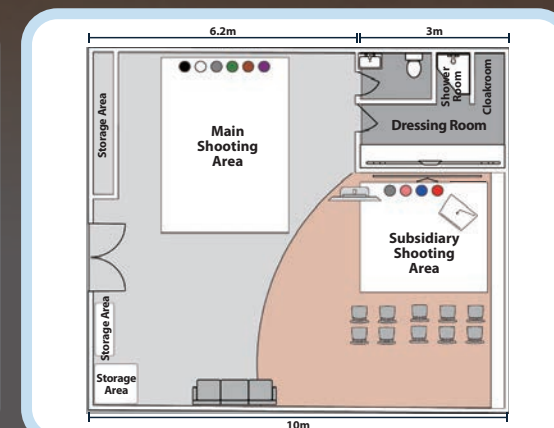

### Commodious space

- Dual shooting area can be shot at the same time
- Over 1,000 sq ft of practical space can accommodate a large number of guest

### Superior location

- Located in Kwun Tong
- Near to MTR
- Convenient transportation





# Phottix X600

COB DAYLIGHT LED

## UNLEASH THE ULTIMATE POWER

- DAYLIGHT COB LED
- EXTERNAL CONTROL BOX
- 500 W
- CRI 95+
- 99 CHANNELS
- POWER CONTROL
- CCT
- 5600K
- 5 SCENARIO EFFECTS
- V MOUNT BATTERY
- AC POWER
- 2.4G REMOTE CONTROL
- SUPPORT DMX 512
- SUPPORT BOWENS MOUNT

The new Phottix X600 COB Daylight LED creates a new trend of LED continuous lighting that broadens the limits of classic flash strobe lighting. The X600 COB Daylight LED light has a ultimate output power of 500W brightness and provides excellent light quality within 5600K daylight.

The Phottix X600 LED light is equipped with a Bowens mount making it possible to be used with a wide range of popular light modifiers. The brightness in lumens is up to 28000lux@2m with the standard reflector.

The X600 LED light features a separate external controller with an LCD display where you can adjust the brightness, using the built-in 5 scenario effects modes, DMX mode. The X600 LED light can also be controlled from a 2.4G Remote control with 99 channels. This light can be powered by AC power or V-mount lithium battery.

SKU of Phottix X600 COB Daylight LED Light  
• 81456 (EU) • 81457 (US) • 81458 (UK) • 81459 (AU)

### Features

- 500W of flattering light
- Excellent color rendering – CRI 95+ (TLCI 97+)
- Separate design of LED body and controller box
- Color temperature 5600K
- Build-in super-silent cooling module
- Digital brightness control
- 5 Scenario effects
- 2.4G Remote control with 99 channels
- Support DMX 512
- V-Mount battery and AC Power
- Support Bowens mount light modifiers
- Durable Carry Bag



### What's included



X600 Light • X600 Control box • Remote control • Standard reflector  
Connection cable • AC power cable • Carrying bag

### Ultra-Quiet Cooling Module

Build-in Ultra-quiet cooling module, it's including 2 quiet cooling fan and dense beehive pattern vents, it can prevent the LED light from over-heating and extend the life of the LED.

### 3 ways remote control methods



### Technical Spec

Color Temperature:	5600K
Brightness Range:	0% – 100%
Max. Brightness / Illuminance:	28000Lux @ 2m / 5600K (with standard reflector)
Max. Power:	With AC input: 500W @ full power With batteries or DC input: 300W @ full power
Led Type:	COB
Color Rendering Index:	95+ / TLCI 97+
Input Power AC/DC Adaptor Operation Voltage:	100-240VAC
Dc Power Operation:	36VDC 10A
Battery Operation:	14.8V / 180W min. V-Mount battery x 4
Dmx Sockets:	RJ-45
Dimension:	LED Light – 183 x 140 x 340mm Control box – 264 x 156 x 245mm
Weight:	LED Light – 2700g, Control box – 2950g





# Phottix X160

## Bi-COLOR LED

Meet the new X160 COB Bi-Color LED light by Phottix.

The new Phottix X160 LED creates a new trend of LED continuous lighting that broadens the limits of classic flash strobe lighting.

The X160 LED light has a strong output power of 150W brightness and provides excellent light quality within 2800-6800K range of colour temperature. The Phottix X160 LED light is equipped with a Bowens mount making it possible to be used with a wide range of popular light modifiers. The brightness in lumens is up to 37000lux@1m with the standard reflector.

The X160 LED light features a separate external controller with an LCD display where you can adjust the brightness and colour temperature, using the built-in 5 scenario effects modes, DMX mode. The X160 LED light can also be controlled from a smartphone app via Bluetooth connection available for Android and IOS. This light can be powered by AC power or V-mount lithium battery.

SKU of Phottix X160 COB Bi-Color LED Light  
81451 (EU) 81452 (US) 81453 (UK) 81454 (AU)

BI-COLOR COB LED

EXTERNAL CONTROL BOX

MAX. POWER 150W

CRI 96+

6 GROUPS

19 CHANNELS

POWER CONTROL

CCT

WIDE RANGE 2800K-6800K

5 SCENARIO EFFECTS

BLUETOOTH REMOTE CONTROL

APPS FOR ANDROID / IOS

V MOUNT BATTERY

AC POWER

SUPPORT DMX 512

SUPPORT BOWENS MOUNT

### Features

- 150W of flattering light
- Excellent color rendering – CRI 96+ (TLCI 98+)
- Separate design of LED body and controller box
- Wide range of color temperature 2800K – 6800K
- Smartphone APP bluetooth remote control with 6 groups and 19 channels
- Support DMX 512
- Digital brightness control
- 5 Scenario effects
- V-Mount battery and AC Power
- Support Bowens mount light modifiers
- Build-in super-silent cooling module
- Durable Carry Bag
- Apps for Android and iOS



To use V-mount Battery



Using AC Power



Pull and hold fasten release lever for Install & remove light modifiers

### What's included



X160 Light • X160 Control box • Standard reflector • Connection cable  
AC/DC adaptor • AC power cable • Control Box bracket • Carrying bag

### Ultra-Quiet Cooling Module

Build-in Ultra-quiet cooling module including quiet cooling fan and vents, it can prevent the LED light from over-heating and extend the life of the LED.

### Wide Range Of Color Temperature



2800K



5500K



6800K

Color temperature photo are reference only\*


### 3 ways remote control methods



Remote Control Box



Mobile APP Control



DMX networks Control

### Technical Specs

Color temperature:	2800K - 6800K
Brightness range:	0% - 100%
Max. brightness / illuminance:	37000Lux @ 1m / 5600K (with standard reflector)
Max. Power:	150W @ full power
LED type:	COB
Color rendering index:	96+ / TLCI 98+
Input power AC/DC adaptor operation voltage:	100-240VAC
Battery operation:	V-Mount battery
Dimension:	342 x 193 x 183mm
Weight:	1770g (not included battery)







Photo: HKDI | Students Project: 伙記 (Waiter)

\*Image composed with two sets of lights.  
Package contains one set.


# HOT ONES

## PROFESSIONAL PHOTOGRAPHER



Rainbow Effect Lens

Sunset Effect Lens

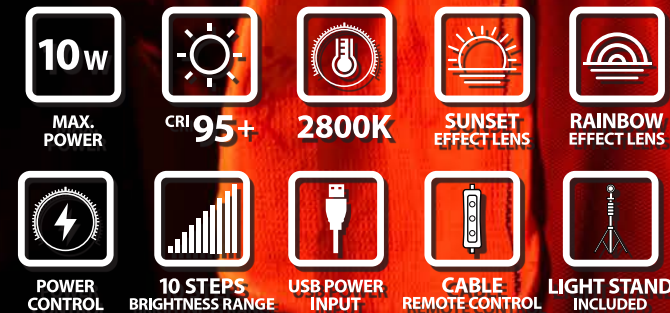

Input Power via Powerbank  
(M200R NOT included\*)

81300 Phottix Solar BG Magic Light Kit Set

## Phottix Solar BG MAGIC LIGHT Kit Set

Just install the effect lens that comes with the package, connect to the USB power supply, then you can enjoy the magic light.

It is suitable for any occasion, whether indoor or outdoor. which is completely DIY to freely set the projection light at different distances and any angles, that it's can create an infinitely changeable, creative and romantic lighting atmosphere for a boring space.

If two effect lenses are used at the same time, an additional set can be purchased for use together to create a richer, even more unexpected lighting atmosphere.

\*Image composed with two sets of lights.  
Package contains one set.

### Features

- Portable available only 340g
- Inter-changeable lens with Sunset Effect and Rainbow Effect
- Magic light head can be rotated 180 degrees
- Easy to use via Cable Remote Control
- 10 steps Brightness range
- Power supply from USB-C input
- Magic Light bottom 1/4" screw hole to light stand
- Light Stand included



USB-C power Cable with Remote Control

### What's included


Solar BG Magic Light x 1, Sunset Effect Lens x 1, Rainbow Effect Lens x 1, USB-C power Cable with Remote Control x 1, Light Stand x 1



180 Degrees Rotatable Head



Power supply from USB-C input



### Technical Specs

Projection angle:	84°
Brightness range:	10 steps
Max. brightness:	180Lux @ 1m (Sunset) 340Lux @ 1m (Rainbow)
Max. power:	10W
Input power:	5V 2.5A USB-C
Color temperature:	2800K (without lens)
Color rendering index:	95+ (without lens)
Dimension:	Ø85mm x 56mm x 126mm
Weight:	340g

### Light Stand for Solar BG Magic Light

Sections	5
Extended Height:	1415 mm
Collapsed Height:	345 mm
Stand Weight:	450 g
Tube Diameters:	25, 22.5, 19.5, 16.5, 13mm
Thread:	1/4" Thread





## Nuada R4 II LED light

### Features

Softlight design for 70W of flattering light

Excellent color - CRI rating of 96+/TLCI 98+


Phottix LED Ecosystem (ECO1) via 2.4G remote control with 3 groups and 40 channels

Digital Power and Temperature Control

Battery and AC Powered

Compact size – 12mm thick

Anti-scratch surface panel

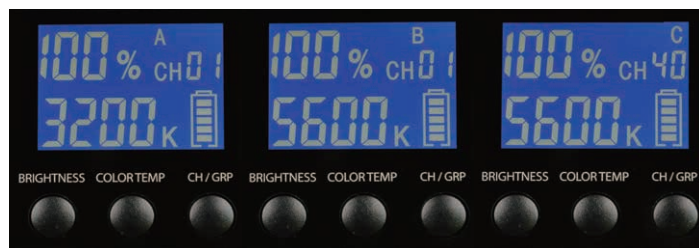

3200K-5600K color temp., Channels ( 1-40 ) and grouping (3 Group A/B/C)

Nuada R4 II LED light series is a large circular soft light built-in **Phottix LED Ecosystem (ECO1)** with 180 warm color and 180 cool color LED bulbs (3200K-5600K), ultra bright 70W full power output, mounted on the edge of the light body frame. **Phottix LED Ecosystem (ECO1)** easy to setup the lighting only via one 2.4G wireless remote control and control panel with 3 groups and 40 channels.



Our build-in diffuser and uses the latest in flicker-free LED technology to provide a uniformly illuminated area light which is soft and glareless. It's suitable for both novice and professional photographers, videographers, Youtuber and vlogger etc.



Nuada R4 II runs on Sony-compatible V-mount battery (not included) which can be used for on-location work.



### What's included

Nuada R4II LED Panel • Remote control • AC Adapter • AC Power Cable • AC Adapter Hanging Bag • Carrying Bag

### Phottix Nuada LED Family:

Nuada R4 II LED Light \* :  
81481 (EU) 81482 (US)  
81483 (UK) 81484 (AU)

81428 Nuada R3 II LED Light Twin Kit \*

81429 Nuada R3 II LED Light \*

81422 Nuada S3 II LED Light \*\*

81423 Nuada S3 II LED Light Twin Kit \*\*

81430 Nuada P LED Light

Nuada Ring60 LED Light

81461 (EU) 81462 (US)

81463 (UK) 81464 (AU)

Nuada Ring60C LED Light \*\*\*  
81501 (EU) 81502 (US)  
81503 (UK) 81504 (AU)

Nuada Ring40C LED Light \*\*\*

81491 (EU) 81492 (US)

81493 (UK) 81494 (AU)

81470 Nuada Ring10 LED Light Go Kit

**Compatible with Phottix LED Ecosystem:**

ECO1 - 2.4G Remote \*

ECO3 - 2.4G Remote \*\*

ECO2 - IR Remote \*\*\*



## Nuada R3 II LED Light & Twin Kit Set

Build-in Phottix LED Ecosystem (ECO1)

The new Nuada R3 II LED features the remote control and remains committed to the flicker-free technology and leading colour high accuracy of CRI96+ (TLCI 98+). The upgraded power is 50W, soft light in 12mm thick ultra-thin circular panel as well as scratch-resistant illuminated diffusion.

### Features

Softlight design for 50W of flattering light

Excellent color - CRI rating of 96+/TLCI 98+

Phottix LED Ecosystem (ECO1) via 2.4G remote control with 3 groups and 40 channels

Digital Power and Temperature Control

AC adapter and 2 x Sony NP Series battery (not included battery)


Compact size – 12mm thick

Anti-scratch surface panel



The AC adapter for indoor use, or 2 pieces of Sony NP-F type battery (NP-F750 or NP-F970) for on-location use.

\*Batteries not included.

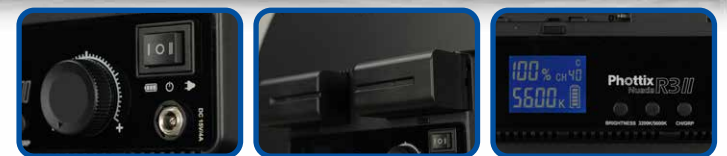

### What's included

Nuada R3II LED Panel x 2 • Remote control x 1 • AC Adapter x 2 • UK plug x 2  
US plug x 2 • EU plug x 2 • SAA plug x 2 • P-220 Light Stand x 2 • Carrying Bag • User manual



Nuada R3 II Twin Pack Kit Dimensions:  
800mm x 400mm x 130mm

Nuada R3 II Twin Pack Kit Weight :  
9430g (not include battery)

### Nuada LED Light series Technical Specs:

Model:	Phottix Nuada Ring 60	Phottix Nuada R4 II	Phottix Nuada R3 II	Phottix Nuada S3 II	Phottix Nuada P
Color rendering index (CRI / TLCI):	CRI 96+	CRI 96+ / TLCI 98+	CRI 96+ / TLCI 98+	CRI 96+ / TLCI 98+	CRI 96+
Color Temp. (adjustable):	3200K~5600K	3200K~5600K	3200K~5600K	2500K~8500K	3300K~5600K
Max Brightness:	1200Lux @ 1m	1800Lux @ 1m	1400Lux @ 1m	1000Lux @ 1m	830Lux @ 0.5m
Power:	60W with USB 5V2A output	70W	50W	40W	16.2W
Battery:	NP Series	V-mount	NP Series	NP Series	NP Series
Battery Life: 5600K at Max Power	2 x NP-F750 75min 2 x NP-F970 120min	-	2 x NP-F750 70min 2 x NP-F970 90min	2 x NP-F750 110min 2 x NP-F970 175min	1 x NP-F750 225min 1 x NP-F970 320min
AC/DC adaptor:	100-240VAC	100-240VAC	100-240VAC	100-240VAC	100-240VAC
Dimensions:	dia 487mm x 47mm	548 x 539 x 38mm	430 x 433 x 32mm	376 x 266 x 25mm	255 x 100 x 30mm
Weight (not include battery):	1250g	3300g	2140g	1170g	290g

Battery Type: 20500 NP-F550 (7.4V 2000mAh) | 20502 NP-F750 (7.4V 4400mAh) | 20503 NP-F970 (7.4V 6600mAh)

Battery life data are reference only.\*






## Phottix Kali 50R RGB LED LIGHT Twin Pack Kit

Wide Range  
Color Temperatures  
2500K - 8500K



Wide Range Color Temperature 2500K-8500K

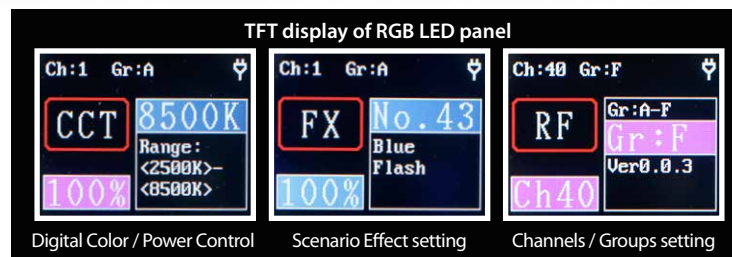

Digital Color / Power Control

Scenario Effect setting

Channels / Groups setting

### Features

- 40W power RGB LED panel
- Excellent color rendering - CRI 96+/TLCI 98+
- 0-360° full color and saturation adjustment (HSI)
- 43 Scenario effect
- Digital Color Control: 2500K – 8500K
- Remote control with 40 Channels / 6 groups (A-F)
- Remote ECO4 can be compatible with ECO1 & ECO3 products
- 2.4G remote control with OLED display
- TFT display of RGB LED panel
- Digital Power Control
- 2 Sony NP-F compatible batteries or AC Adapter
- Durable aviation-grade Aluminum shell
- 4-leaf metal Barn Door

### What's included

Kali50R RGB LED Panel x 2 • Remote control • AC Adapter x 2  
EU plug, US plug, UK plug, SAA plug x 2 • F-180 Light Stand x 2  
Carrying Bag • User manual

SKU: 81446 Phottix Kali50R RGB LED Twin Kit  
SKU: 81445 Phottix Kali50R RGB LED

### Technical Specs

#### Kali50R RGB LED

Color temperature:	2500K - 8500K
Brightness range:	01% - 100%
Max. brightness / illuminance:	1000Lux @ 1m
Max.Power:	40W
Color rendering index / TLCI	96+ / 98+
Input power AC/DC adaptor operation voltage:	100-240VAC
Battery operation:	2 x NP-F750 or NP-F960 battery
Battery Life:	2 x NP-F750 (7.4V 4600mAh) 70 min 2 x NP-F960 (7.4V 6600mAh) 90 min
LED quantity:	100pcs Cool + 100pcs Warm + 108pcs RGB
Dimension:	274mm x 64mm x 259mm
Weight:	1128g (not include battery)
Kali50R Twin Kit carry bag Dimension:	525mm x 525mm x 175mm
Kali50R Twin Kit carry bag Weight:	7700 g (not include battery)

#### Remote Control ECO4

Remote Control:	40 channels 2.4G wireless remote control
Remote Control Range:	<50m
Remote Control Battery operation:	AAA x 2


Remote Control  
ECO4 with  
OLED display



Digital Color /  
Power Control



0-360° full color (HSI)



Scenario Effect



Channels / Groups  
setting



## Phottix Nuada S3 II LED LIGHT Twin Pack Kit



Wide Range  
Color Temperatures  
2500K - 8500K

### Features

Softlight design for 40W of flattering light

Excellent color – CRI rating of 96+/TLCI 98+

Phottix LED Ecosystem (ECO3) via 2.4G remote control  
with 3 groups and 40 channels

Wide range color temperature 2500K-8500K

Digital brightness and temperature control panel

AC adapter and NP batteries operation (not included battery)

Compact size – 25mm thick




Channels ( 1-40 ) and grouping(3 Group A/B/C)

### Phottix Nuada S3 II LED

### Technical Specs

Color temperature	2500K - 8500K
Brightness range	01% - 100%
Max. brightness / illuminance	1000Lux @ 1m
Max.Power	40W @ full power
Color rendering index / TLCI	96+ / 98+
AC/DC adaptor operation voltage:	100-240VAC
Battery operation	2 x NP-F750 or NP-F960 battery
Battery Life:	2 x NP-F750 (7.4V 4600mAh) 110 min 2 x NP-F970 (7.4V 6600mAh) 175 min
LED numbers	144 Pcs Cool color 144 Pcs Warm color
Dimension	376mm x 266mm x 25mm
Weight	1170 g (not include battery)
Nuada S3 II Twin Kit carry bag Dimension	525mm x 525mm x 175mm
Nuada S3 II Twin Kit carry bag Weight	6200 g (not include battery)

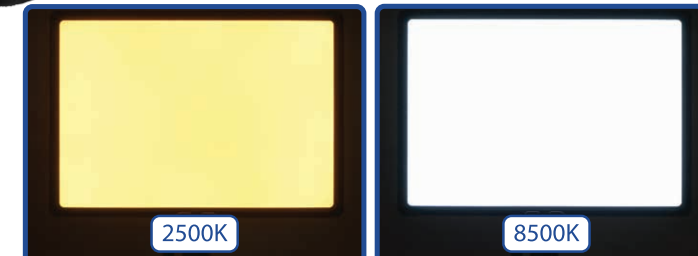

Wide range color temperature 2500K-8500K



### What's included


Nuada S3 II LED Panel x 2 • Remote control ECO3 • AC Adapter x 2 • UK plug x 2  
US plug x 2 • EU plug x 2 • SAA plug x 2 • F-180 Light Stand x 2 • Carrying Bag  
Mounting bracket x 2 • User manual

### ECO3 Remote Control

Remote Control	40 channels 2.4G wireless remote control
Remote Control Range	<50m
Remote battery operation	AAA x 2

### Technical Specs

81422 Phottix Nuada S3 II LED Light  
81423 Phottix Nuada S3 II LED Light Twin Kit Set

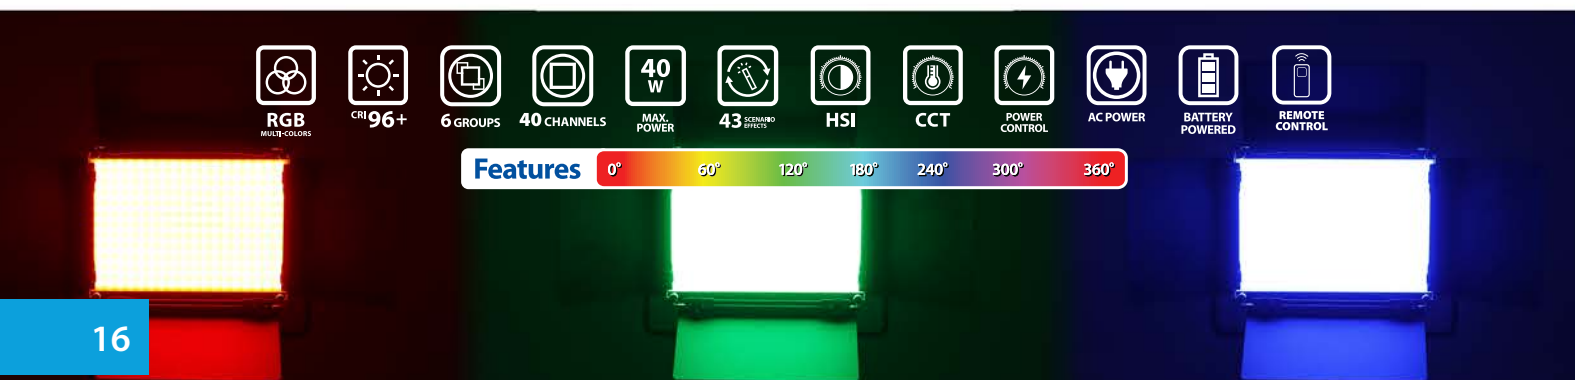





# Phottix Nuada Ring 10 LED LIGHT Go Kit

81470 Phottix Nuada Ring10 LED Light Go Kit

## Features:

- Softlight design for 10W of flattering light
- Excellent color - CRI rating of 96+
- Handy portable 10inch dia sizes
- Easy "Touch & Slide" brightness and color temp. control
- Foldable 90°/180° compact design
- Micro USB 5V2.1A Power input
- MT-one mini tripod easy for outdoor or flexible live stream

**CRI 96+** Phottix Nuada Ring 10 is a perfect light for live streaming, photography, videography, beauty makeup and smartphone content creation. The Ring dia. 10 inches (25.4cm) as a lightweight, portable and dimmable LED that satisfying different environmental shooting needs.



## 180 DEGREE FOLDABLE DESIGN

Phottix Nuada Ring 10 unique 90°/180° foldable design. This is a space-saving feature.

Furthermore, lighting up 2 users face-to-face online meeting in different cameras.



- TOUCH & SLIDE CONTROL**
- POWER CONTROL**
- COLOR TEMPERATURE CONTROL**

The control panel is "Touch & Slide" bar that easily finger touch from left to right turning the brightness and color temperature.

It can assemble Phottix MT-One mini tripod with cold shoes mount for selfie and video recording with an external microphone. One micro USB power input port that allows you making the content everywhere with power-bank.



## Phottix Nuada Ring10 LED Light Technical Specs:

Color Rendering Index:	96+
Color Temperature:	2600K - 5800K
Max. Brightness / Illuminance:	450Lux @ 0.5m (@5800K)
Power Consumption:	10W @ LED full power
Input Power Operation Voltage:	DC 5V 2.1A
LED Number:	5800K cool color 60 PCS 2600K warm color 60 PCS
Dimension:	dia 260mm x 15mm (without stand)
Weight:	217g (without stand)



# Phottix Nuada Ring 60

- CRI 96+**
- COLOR TEMPERATURE CONTROL**
- POWER CONTROL**
- AC POWER**
- BATTERY POWERED**
- USB POWER OUTPUT**

The 19 inch(49cm) ring design of the Phottix Nuada Ring 60 LED is made up of 216 pieces of 5600K cool color LED beads and 216 pieces and 3200K warm color LED beads, with a total output of 48W.

It is the perfect light setup for photography, videography, Makeup Artists, livestream shooting and smartphone content creation.



## Features


- Softlight design for 48W of flattering light
- Excellent color - CRI rating of 96+
- Easy Brightness and Color Temperature Control from front and rear
- USB 5V2.1A output for recharge smartphone
- Battery and AC adapter Modes
- 5 cold shoe mounts for smartphone, mic, etc
- Camera bracket easy for youtuber / live steaming

The Phottix Nuada Ring 60 includes a Light-weight collapsible light stand and a carry bag for easy travel and on-location setup.

The LED body has 5 cold-shoe mounts, which includes a camera Bracket and a smartphone clip. The back panel also has 1 x USB output which can provide power to a smartphone or a camera.



The Nuada Ring 60 runs on Two Sony-compatible NP-F750/960 batteries (not included), which makes it perfect for on-location work. An AC adapter is also included.

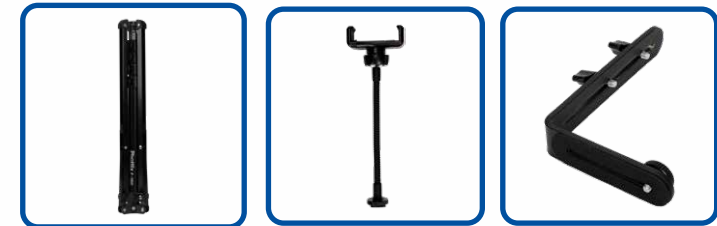

## What's included


- Nuada Ring 60 LED Panel • Light stand • Camera Bracket • Smartphone clip
- AC Adapter • AC Power Cable • Carrying Bag
- 81461 Nuada Ring60 LED Light (EU)
- 81462 Nuada Ring60 LED Light (US)





- Features**
- Flicker-free LED technology
  - Warm color and Cool color operation by Independent LED light bulb
  - Excellent color rendering - CRI 96+ (TLCI 98+)
  - Phottix LED Ecosystem (ECO2) via IR wireless remote control with 3 channels
  - Adjusting Brightness and Temperature Control
  - 3 x Cold shoe mount and 2 x USB power output
  - Compact size – 20mm thick
  - Smartphone bluetooth shutter with the Remote Control
  - Aluminium alloy rotary adjustment knob

Technical Specs		
Model:	Nuada Ring40C	Nuada Ring60C
Color rendering index:	CRI 96+ / TLCI 98+	CRI 96+ / TLCI 98+
Color temperature:	3200K - 5600K	3200K - 5600K
Brightness range:	0% - 100%	0% - 100%
Max. brightness / illuminance:	700Lux @ 1m (@5600K)	900Lux @ 1m (@5600K)
LED Power:	30W	40W
Power Consumption:	42W @ LED full power with USB	52W @ LED full power with USB
USB output:	5V2.4A output	5V2.4A output
Input power AC/DC adaptor operation voltage:	5V 2.4A x 1 / 5V 1.2A x 2	5V 2.4A x 1 / 5V 1.2A x 2
LED number:	5600K cool color 96PCS 3200K warm color 96PCS	5600K cool color 128PCS 3200K warm color 128PCS
Dimension:	dia 380mm x 20mm	dia 458mm x 20mm
Weight:	575g	760g
Remote Control:	IR wireless remote control with 3 channels	
Bluetooth remote:	camera shutter for Android and IOS smartphone	
Remote distance:	5m	
Remote battery operation:	AAA x 2	

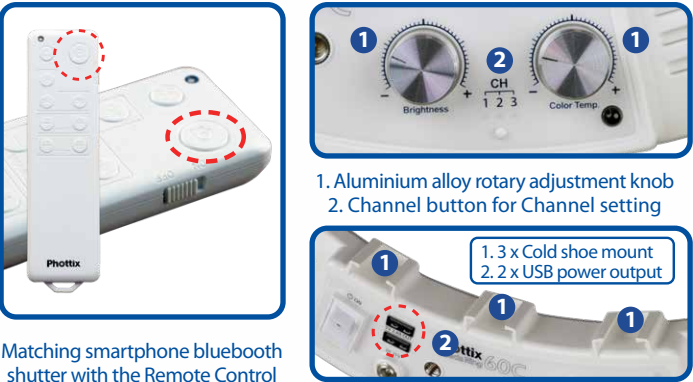


Matching smartphone bluetooth shutter with the Remote Control



- What's included**
- LED Panel • IR remote control • Smartphone clip • AC/DC Adapter  
AC Power Cable • F-180 Light stand
- Phottix Nuada Ring40C LED Light 81491 (EU) 81492 (US) 81493 (UK) 81494 (AU)  
Phottix Nuada Ring60C LED Light 81501 (EU) 81502 (US) 81503 (UK) 81504 (AU)



- Phottix M200R RGB Light Technical Specs:**
- Color temperature: 3200K - 5600K  
Color model: 0-360° full color control (HSI)  
Brightness range: 1% - 100%  
Max. brightness / illuminance: 1200 Lux @ 0.5m (5600K)  
Max. Power: 10W  
Color rendering index: 96+  
Battery Capacity: 3.7V 4000mAh  
Charging / Input power: 5V 2A USB-C  
External Output power: 5V 2A USB  
Dimension: 151 x 80 x 11.5mm  
Weight: 200g

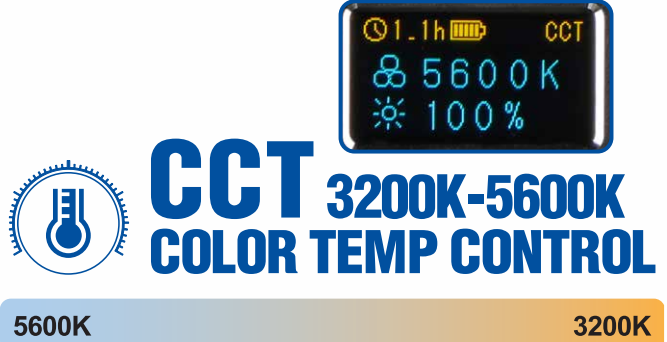

\*Product images are for reference only and may differ from the actual product.



81467 T200R RGB Tube Light

Wide Range  
Color Temperatures  
2500K - 9500K

Phottix T200R RGB TUBE LIGHT

HSI  
H: 360° S: 100%  
S: 100%

**T200R RGB TUBE LIGHT**

CRI 96+ MAX. POWER 10W MAGNETIC DESIGN RGB MULTI-COLORS 21 SCENARIO EFFECTS HSI

WIDE COLOR RANGE 2500K - 9500K CCT POWER CONTROL 72 WARM COLOR BULB 72 COLD COLOR BULB 36 RGB COLOR BULB

### Features

- Excellent color rendering – CRI 96+ (TLCI 98+)
- Built-in enhance mounting magnets
- Runtime is 115 minutes at full power @ 9500K color
- Full 0-360° color hue and saturation adjustment
- CCT Color: 2500-9500K
- 21 preset scenario effects
- Long-life, low-heat LEDs
- Long-life built-in battery
- Adjustable brightness and color temperature
- LED display
- Included the mini stand for handheld or stabilizer
- Dual standard 1/4" threaded mounting lug (top and bottom of tube body)
- Allows install with a multi-lamp splicing special accessories (Not Included)



### What's included

1. T200R RGB Tube Light premium unit
2. USB-C recharge cable
3. Mini stand
4. RGB label
5. Printed user manual

Full 0-360° Color Hue & Saturation Adjustment

2500K - 9500K Color Temperature

21 Present Scenario Effects

Combined with each other using mutual magnetic force

81469 Phottix MT 2 Light Coupler Connector  
\*SOLD SEPARATELY

### Technical Specs

Color temperature:	2500K - 9500K
Color model:	0-360° full color control (HSI)
Brightness range:	1% - 100%
Max. brightness / illuminance:	830Lux @ 0.5m (5600K)
Max. Power:	10W
Color rendering index:	CRI 96+
Battery Capacity:	3.7V 5200mAh
Battery Life:	about 115min with 100% power @ 9500K color
Recharging power:	5V 2A USB-C
Recharge time:	about 4hrs (5V 2A)
Dimension:	323 x 36 x 36mm
Weight:	270g

### Features

- Mount Multiple T200R Together
- 1/4"-20 male threads of the each surface
- Each connector has a twist lock
- The surface of each connector is 45mm, which makes the T200R more tightly and firmly installed in it.



Perfect fit for install to Dual 1/4" threaded mounting lug



81469 Phottix MT2 Light Coupler Connector

### Specification

Dimensions:	45mm (Diameter), 25.2mm (Height)
Thread:	1/4"-20 male x 2
Net Weight:	50g



1:1 Scale actual size

## MT2 LIGHT COUPLER CONNECTOR for T200R RGB TUBE LIGHT

The Phottix MT2 Light Coupler Connector tailor-made for T200R RGB Tube Light (81467), it has 1/4"-20 male threads at each end to connect multiple T200R together for increased brightness.



MOBILE

RGB LED Family

Phottix

RGB LIGHT M100R

Wide Range Color Temperatures 2500K - 8000K

RGB MULTI-COLORS

CRI 96+

30 WARM COLOR BULB

30 COLD COLOR BULB

36 RGB COLOR BULB

6.5 W MAX. POWER

21 SCENARIO EFFECTS

HSI

CCT

POWER CONTROL

Features 0° 60° 120° 180° 240° 300° 360°

## Features

- Excellent color rendering - CRI 96+ (TLCI 98+)
- Full 0-360° color hue and saturation adjustment
- 21 present scenario effects
- Wide range of color temperature 2500K – 8000K
- Pocket size – 110 x 61 x 11.5mm thick
- Adjustable brightness and color temperature
- Long-life, Low-Heat LEDs
- Long-Life Built-In Battery




## What's included

M100R LED Panel unit • USB-C recharge cable • Cold shoe adaptor • Mini stand Smartphone Clip • Printed user manual • RGB round label

## Technical Specs

SKU / Model	81439 M1000R	81438 M500R	81419 M200R	81418 M100R
Color temperature:	3200K - 5600K			2500K - 8000K
Color model:	0-360° full color control (HSI)			
Brightness range:	1% - 100%			
Max. brightness / illuminance:	3200Lux @ 0.5m (5600K) 750Lux @ 1m (5600K)	2000Lux @ 0.5m (5600K) 550Lux @ 1m (5600K)	1250 Lux @ 0.5m (5600K) 300Lux @ 1m (5600K)	600 Lux @ 0.5m (5600K) 160Lux @ 1m (5600K)
Max. Power:	24W	18.5W	10W	6.5W
Color rendering index:	CRI 96+ / TLCI 98+			
Battery Capacity:	3.7V 20000mAh	3.7V 10000mAh	3.7V 4000mAh	3.7V 1500mAh
Battery Life: (with 100% power @ 5600K)	about 200min	about 120min	about 90min	about 55min
Recharging power:	5V 3A USB-C	5V 2A USB-C	5V 2A USB-C	5V 1.3A USB-C
Recharge time:	about 8hrs (5V 2.4A)	about 8hrs (5V 2A)	about 4hrs (5V 2A)	about 2hrs (5V 1.3A)
External Output power:	5V 3A (Max) USB / USB-C	5V 2A USB	5V 2A USB	-
Dimension:	280 x 180 x 13.7mm	200 x 121 x 13.7mm	151 x 80 x 11.5mm	110 x 61 x 11.5mm
Weight:	992g	508g	200g	117g



TINY but POWERFUL

CRI 90+

50 COLD COLOR BULB

3.5 W MAX. POWER

Actual Size (1:1)

81401 Phottix M5 LED Light

Actual Size (1:1)




## Features

- Tiny size - 72 x 41 x 10.5mm
- Light-weight - 44g
- 5 steps Brightness range
- Color temperature - 6600K (±500K)
- Monitor clip compatible for Notebook and Mobile Phone
- 1/4" screw mounting



## How to mount the Notebook monitor clip

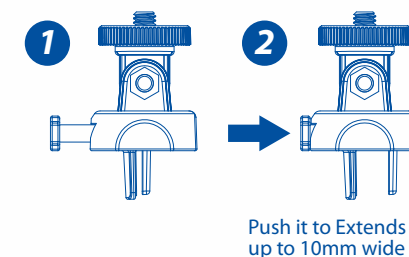

## Technical Specs

Color temperature:	6600K (±500K)
Brightness range:	5 steps
Max. brightness / illuminance:	440 Lux @ 0.5m
Max. Power:	3.5W
Color rendering index:	90+
Battery Capacity:	3.7V 500mAh
Charging / Input power:	5V 500mA Micro USB
Dimension:	72 x 41 x 10.5mm
Weight:	44g

## What's included

M5 LED Panel unit • Micro USB recharge cable • Cold shoe adaptor • Notebook monitor clip (installed on M5 unit)



# Phottix PE98

## Table LED



CRI 97




Your Study Lighting  
Right Choice

## PE98 Table LED Features

- CRI 97
- Reducing the effects of blue light
- Uses the latest in Flicker-Free LED technology
- 5 presets color temperature
- Brightness Control
- Wireless charger for smartphone
- USB power output
- Foldable lamp head

### Why Need High Color Rendering Index (CRI)?

Color rendering index (CRI) demonstrates a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with an ideal or natural light source. Light sources with a higher CRI are more desirable to human eyes for comfortness and vision protection.

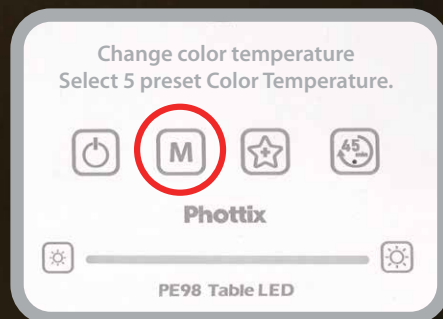

### Specification

Color Rendering Index :	97
5 preset Color Temperature :	4000K > 3500K > 4500K > 3000K > 5500K
Max. Brightness :	800lm
Power Consumption :	24W
LED numbers :	48PCS LED
Wireless charger :	10W
USB power output :	5VDC 1A
AC / DC adaptor operation voltage :	100-240VAC
Unit size :	520 x 133 x 65mm
Weight :	1210g

### What's included

PE98 Table LED Lamp • AC / DC adaptor • User manual  
SKU: 81601 (EU) 81602 (US) 81603 (UK) 81604 (AU)



## Live Stream series



99944 Phottix PC-60 4K Ultra HD Webcam

## Phottix PC60

### 4K ULTRA HD WEBCAM



### Features

4K UHD resolution 3840x2160p 30fps

Auto Focus

Auto Exposure

Auto White Balance

Build-in Microphone

Privacy Cover

USB plug & play no driver needed

360 Degree Rotation

Webcam Stand Included

1/4" thread Mount

Support Windows / Mac OS



Mount on laptop



Mount on monitor



Mount on Phottix AR35 boom arm stand  
SKU 99930 (Sold Separate)



Slide the lens Cover  
keep close for privacy



Forward & Backward Adjustment  
of the webcam head



Build-in Microphone  
for Voice Pickup



USB plug & play



1.4" threaded mount



Webcam Head  
360 degrees rotatable

### Technical Specs

#### PC60 4K Ultra HD Webcam

Resolution:	3840x2160 / 2592x1944 / 2160x1440 / 1920x1080 / 1280x720 / 640x480
Sensor:	1/3.2" with 8 Megapixel CMOS
Frame rate:	30fps
Field of view:	80 degrees
Focus:	Auto focus
Minimum focusing distance:	2mm
Microphone:	Omnidirectional
Connection:	USB 2.0
Video Encoding:	MJPEG
Systems support:	Windows XP SP2 / 7 / 8 / 10 / 11 or above; Mac OSx10.6 or above
USB cable length:	1.5m
Unit dimension:	90 x 56 x 54mm
Weight:	110g

#### Webcam Stand

Stand Base dia	114mm
Height: (only stand)	178mm - 252mm (Maximum)
Height: (webcam with stand)	220mm - 295mm (Maximum)
Weight:	310g

### What's included

1. PC60 4K Ultra HD Webcam
2. Webcam Stand
3. Instruction Manual





## Live Stream series

# Phottix MC20 Kit

Universal Cardioid



99918 Phottix MC-20 Kits

### What's included

MC-20 Micphone • Shock mount • Sponge Mic muff • Furry windshield muff  
TRS cable (for camera) • TRRS cable (for smartphone) • Storage pouch



The MC20 Kits included cardioid microphone, MT-one smartphone tripod with an anti-fall wrist lanyard, which specially designs to improve the sound quality of smartphone or camera of the built-in microphones.

With both TRS cable and TRRS output cable included is compatible with Smartphones, cameras, camcorders, audio recorders, PCs, and other audio/video recording devices.



### Features

Cardioid microphone with smartphone tripod

No batteries required for camera or smart phone

Support both TRS and TRRS system

Furry windshield and Sponge Mic muff for reduce the wind noise

Anti-shock mount reduce unwanted vibration and noise

Fast rotate switching between camera / selfie mode

Cold shoe & 1/4" screw mounting

The MC20 comes out in compact size and light-weight with rugged ABS structure, it will not be a heavy burden while shooting. Plug and play design, no need to worry about battery status.





Included an shock mount, which can effectively reduce unwanted vibration, cable and handling noise. Also included a furry windshield muff and Sponge Mic muff is designed to minimize the wind noise when recording in high wind conditions.

### Technical Specs

Polar Pattern:	Cardioid
Frequency Response:	50Hz-20KHz
Sensitivity:	-34dB ±2dB (0dB = 1V / Pa @ 1kHz)
Signal to Noise Ratio:	>70dB
Maximum SPL:	110dB
Output impedance:	0.68K
Weight:	50g
Dimensions:	21x 88mm

### Frequency Response

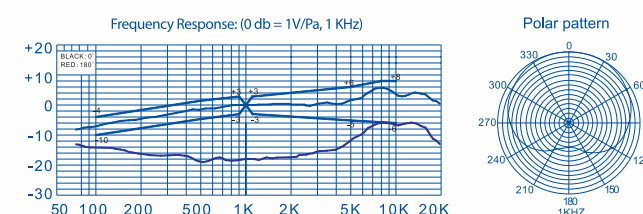

## Live Stream series

# Phottix MC10

Omnidirectional Lavalier



99916 Phottix MC-10 lavalier microphone



The Phottix MC-10 is an omnidirectional condenser lavalier microphone for wide range applications. The MC-10 is compatible with camera and smartphone.

It is designed for most recording devices with 3.5mm Jack TRS or TRRS microphone input, applied to video recording, live streaming, vloggers, podcasting, garageband, Interviews, online tutorial, video meeting and more.

### Features

Superior audio quality

Plug and play no drivers needed for camera or smart phone

Support both TRS and TRRS system

Built-in noise reduction circuit

No batteries required



Adopts good-performance pickups with high sensitivity and wide frequency response, omnidirectional acoustic technology design and acoustic signals collection Performs significantly better than the majority of the built-in microphones.

Features with superior protection from interference ability, free windshield together and Built-in noise reduction circuit design to effectively suppress environmentally noise. Besides, the windscreen eliminates unwanted breath and wind noises. Camera / Phone function switching used for which device switch to the icon position.




NO BATTERIES REQUIRED with Plug and play will allow you to use whenever and wherever.

\*For Apple lighting to 3.5mm adapter is NOT INCLUDED with MC-10

### Technical Specs

Element:	Back Electret Condenser
Polar Pattern:	Omni-Directional
Microphone Connector:	3.5mm (TRS / TRRS)
Frequency Response:	30Hz-20KHz
Sensitivity:	-32dB ±3dB (0dB = 1V / Pa @ 1kHz)
Equivalent noise level:	22dBA
Maximum SPL:	130dB
Output impedance:	2.2K

### Frequency Response

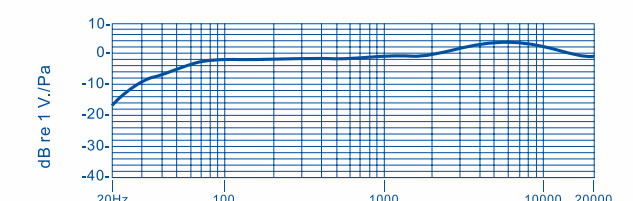





## Features

Ideal for live stream, post-production keying and photography

Ultra-thin thick frames flat stand against a wall

4-color (green/blue and black/white)  
1.5m x 4m Muslin background included


Quick to assemble

Collapses flat into a carry bag



The Q-drop is a 1.52m (5") width x 2.26m (7.4") height collapsible backdrop. The frame structure has an elastic cord that runs through it. It's complete can be assembled in minutes.

The flat stand and ultra-thin frame tube 27mm diameter to allow to be set up flat to lean against a wall. The chroma key blue / green screen just simply used the velcro straps posted on the fabric upright to the aluminum frame.



velcro straps mounting the fabric upright to the aluminum frame.



## Technical Specs

Dimension	
Frame with background and backdrop Stand	2260mm x 1520mm x 2130mm
Frame without background and with backdrop Stand	2260mm x 1520mm x 360mm
Collapsed with carry bag	200mm(dia) x 1300mm
Frame tube diameter	27mm
Muslin background (Green/Blue & White/Black)	4000mm x 1500mm
Backdrop stand gasket	360mm x 77mmm

## Weight

Total Package	6200g
Muslin background (Green/Blue + White/Black)	3200g
Backdrop frame + stand + stand gasket + stand screw	2500g
Carry Bag	500g




## What's included

- Green / Blue Muslin background x 1
- Black / White Muslin background x 1
- Backdrop frame x 1
- Backdrop stand x 2
- Backdrop stand gasket x 2
- Backdrop stand screw x 2
- Carry bag x 1

# Live Stream series

## Phottix AR35 Boom Arm Stand

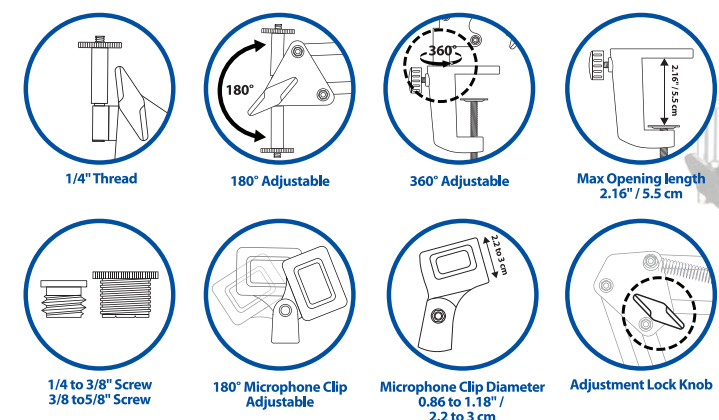

Phottix AR35 boom arm stand is designed for the mounting microphone, LED light and webcam which gears with 1/4" screw mount to a desk allowing for height and angles to be easily adjusted during recording, broadcasting, voice-over ASMR sound production and lighting up or video-graphing your work on the table.



The AR35 can be reached max. 74cm. It offers dual scissor arm extension springs so you can adjust the position how you like. Built-in 1/4" threaded screw which head rotated 180° as well as compatible camera and most shock mounts. The rugged steel arm with matt black coated that max. payload 1kg.



It includes ABS mic clip holder, table mounting clamp, 1pc of 3/8" to 5/8" screw and 1pc of 1/4 to 3/8" screw.



99930 Phottix AR35 Boom Arm Stand

## Technical Specs

Maximum Height:	745mm ( from table clamp to 1/4 thread )
Collapsed Dimension:	395mm x 120mm x 42mm (not included table clamp and accessories)
Weight:	353g (not included table clamp and accessories)
Loading:	1.5kg
Thread:	1/4" Thread

## What's included

- AR35 Boom Arm Stand
- Table Mounting Clamp (max. 5.5cm)
- 3/8" to 5/8" Screw
- Mic Clip Holder (for mic dia 0.86" to 1.18")
- 1/4" to 3/8" Screw



# Phottix® MT3 Mini Tripod 5-in-1 Kit Set

The MT3 mini tripod made of high-quality Metal legs solid construction. The non-slip rubber on the bottom of tripod legs ensures the stability.



Unique 5 in1 design, kit set included the Tripod MT-03 (1), ball head (2), Phone holder (3), GoPro adaptor (4), cold shoe (5) can be removed and installed on another tripod with 1/4" screws.

Extendable legs of tripod can be adjusted by pressing the button middle of leg. Working height from 13cm to 23cm. By rotating the 360° ball head, you can freely adjust the shooting angle you need. Folded height is only 24cm, 280g lightweight, allow Max Loading 2kg.

Height of Tripod only \*



Standard 1/4" screw lock compatible with DSLR/mirrorless cameras, DV, action cameras, LED video lights, projector, webcam, GoPro devices, Hot shoe flash light, Smartphone and Microphone.



Pocketable design, foldable and portable, easy for storage, you can carry it anywhere. Perfect for travel. More such as for video recording, still photography, on-location shooting and live stream.




## MT3 Mini Tripod 5-in-1 Kit Set

Technical Specs:

Closed Length:	24cm
Max Height:	23cm
Min Height:	13cm
Max Loading:	2kg
Weight:	280g

\*Pictures are reference only

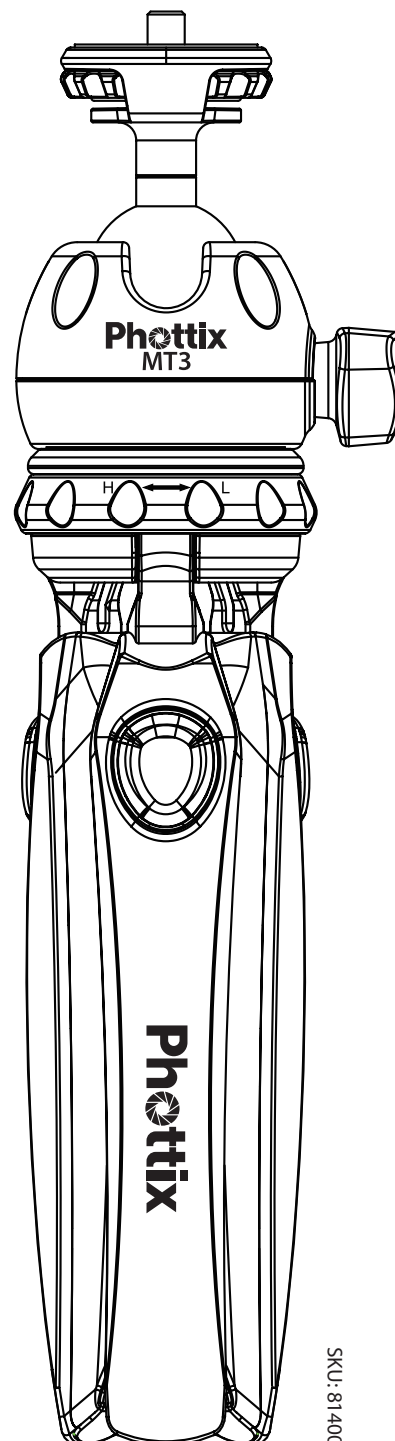

SKU: 81400

# Phottix® MT-one SmartPhone Tripod Kit Set

## Special Features:



Hemisphere  
Tilt Head Design



360 Degree  
Rotating




Fits Devices from  
2.2 to 3.5"



Phone clip with  
Cold Shoe Mount

## Part of the Smartphone Holder

- Hemisphere tilt head design can adjust to tilt back angle
- 360 degree rotating phone holder for portrait mode (vertical) or landscape mode (horizontal) photo shoots
- Fits Devices from 2.2" to 3.5"
- Phone clip with cold shoe mount
- Universal 1/4" thread tripod mount
- Compatible with the most tripod and other accessories



Tripod stand  
for Selfie Stick



Tripod stand  
for Stabilizer




Pocketable Grip



Light-Weight  
only 95g

## Part of the Handheld Tripod

- Tripod stand for selfie Stick - tripod will turn to a comfy handle when you folding it together
- Tripod for stabilizer - can stand on the table or floor
- Multi-functional Tripod Use - flexible switch from tripod into handle, easy to be fold up or tear down for portable
- Pocket-size and Lightweights only 95g suitable for all kinds occasions like live streaming, traveling, interviewing etc.

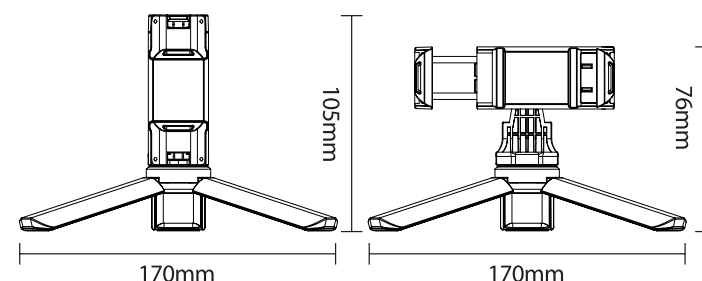


Tripod Stabilizer for  
Vlogger and Live Streaming



Tripod Selfie Stick for  
Interviewing and Live Streaming



99913 MT-one Smartphone Tripod Kit Set

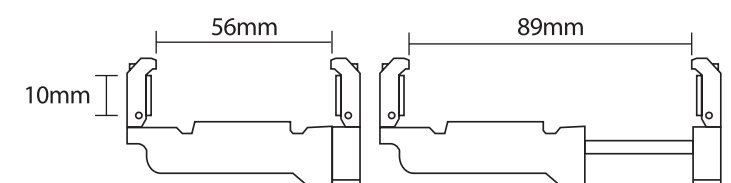





## Phottix Odin Z Operating System

### Lighting from A to Z

From day one, we have had several goals, the first being to make working with light as simple and easy as possible for photographers at every level.

To make things more simple, more intuitive, our team has invested two years in developing the next generation of the Phottix products. The key to this simplicity is the new Odin Z Operating System.

Odin Z keeps the most-loved Phottix features and adds cutting-edge options and technologies. Best of all, it's available to all Phottix users through a firmware upgrade. We believe in moving forward while leaving no one behind.

#### The Odin Z System features:



Auto-Metering



Auto-Switching




Real-Time Power Control

- Auto-Switching - Every TTL system is built into every product
- Auto-Metering - Phottix products will tell you what power level to set
- Real-Time Displays - Power levels displayed on products and triggers
- Simplified - Software and hardware protocols have been upgraded and streamlined for easier use

Phottix's technology has evolved and we want to ensure our customers can use this technology to evolve their skills and advanced their hobby or career. No matter how challenging the image they set out to create, working with Phottix gear should be anything but challenging.

From hobbyists to seasoned professionals Phottix provides lighting solutions from A to Z.

# Phottix®

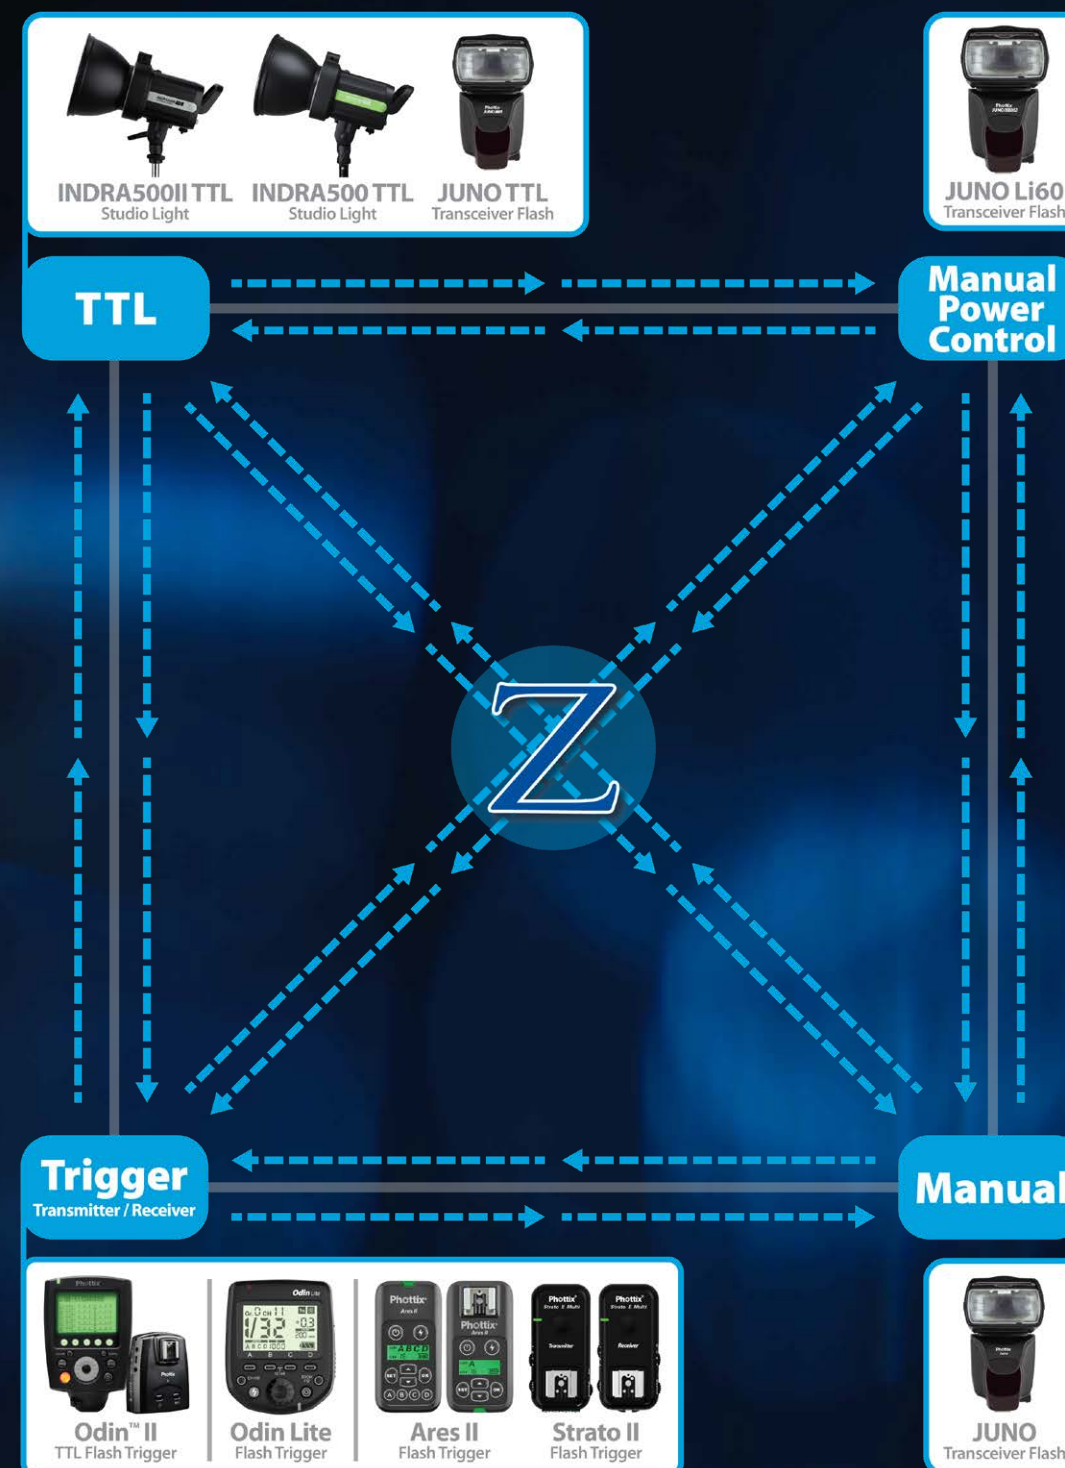





# INDRA500II TTL

## Studio Light

Powered by Odin Z



Auto-Metering



Auto-Switching



Real-Time Power Control



1/8000s  
SYNC  
SPEED



1/1 to 1/128  
8 STOPS ADJUSTMENT

Phottix's landmark 500 Watt TTL Studio Light has been the "go-to" location and studio light for serious photographers. Phottix is proud to present the Phottix Indra500II TTL- the next generation featuring Odin Z OS functions.

The Phottix Indra500II TTL bring new features to the table:

- Improved battery technology. Get 500 full power shots per charge - a 20% increase over the original Indra500 TTL.
- Upgraded hardware
- Odin Z OS Built-in

SKU:00341 Phottix Indra500 II TTL Studio Light and Battery Pack Kit (EU&UK)  
SKU:00342 Phottix Indra500 II TTL Studio Light and Battery Pack Kit USA  
SKU:00343 Phottix Indra500 II TTL Studio Light and Battery Pack Kit AU  
SKU:00344 Phottix Indra500 II TTL Studio Light and Battery Pack Kit TW  
SKU: 00306 Phottix Indra500 TTL Studio Light and Battery Pack Kit (EU&UK)  
SKU: 00307 Phottix Indra500 TTL Studio Light and Battery Pack Kit USA  
SKU: 00309 Phottix Indra500 TTL Studio Light and Battery Pack Kit AU  
SKU: 00303 Phottix Indra500 TTL Studio Light and Battery Pack Kit TW

With the Odin Z Operating System, the Indra500II TTL gets the same great feature set as other Phottix products including:

- All-in-one Auto Switching. TTL systems for Canon, Nikon, Sony and Pentax built-in. The Indra500II will automatically adjust to the system being used\*
- Auto-Metering. Can be used on as a light meter\*
- Real-time manual power display\*



When used with the Phottix Odin II TTL Flash Trigger for Canon, Nikon, Sony or Pentax you have the ultimate in control. Eight stops of power adjustment - from full power to 1/128 in Manual Mode and +/- 3 EV in TTL mode, with High Speed Sync shutter speeds up to 1/8000s.

Manual only shooters can use the new Phottix Odin Lite to control the Indra500II TTL from any camera system. Perfect for photographers that switch between formats and systems.

\* On compatible cameras, when used with the Odin II and Odin Z Operating System.



# INDRA 500 LC

Powered by  
Phottix Laso TTL  
for Canon only



100  
METERS  
RANGE



1/8000s  
SYNC  
SPEED



15  
CHANNELS



5  
GROUPS

The Indra500LC gives photographers 500W/s of TTL power, opening up new possibilities and allowing photographers to shoot in shutter and aperture priority modes with incredible power.

In manual mode the Indra500LC offers 8 stops of power adjustments - from full power to 1/128 in 1/3rd stop increments. With Stroboscopic Mode, the Phottix Indra can be used for special effect and creative shooting with flash frequency of 1-100Hz and flash counts of 1-100 times.

The Phottix Indra500LC TTL has the power and control of the Canon RT and Phottix Laso triggering systems built-in. Switch between TTL and Manual modes, adjust EV and manual power levels and use high speed sync, all from the Canon ST-E3, compatible Canon RT Speedlites and the Phottix Laso Transmitter - no extra hardware is needed

SKU: 00336 Phottix Indra500LC TTL Studio Light and Battery Pack Kit (EU & UK)  
SKU: 00337 Phottix Indra500LC TTL Studio Light and Battery Pack Kit (USA)  
SKU: 00339 Phottix Indra500LC TTL Studio Light and Battery Pack Kit (AU)

# Laso

Compatible with the  
Phottix Indra500LC, Canon radio and non-radio  
ETTL flashes



100  
METERS  
RANGE



1/8000s  
SYNC  
SPEED



15  
CHANNELS



5  
GROUPS

Laso Transmitter

The Phottix Laso Transmitter can control and trigger 5 groups (15 units) of Canon-compatible radio-enabled flashes. The Laso Transmitter can also control and trigger the Phottix Indra500LC Studio Light.



Features :

- 5 Groups: A, B, C, D, E\* • 2.4 GHz frequency • 100m range
- 15 channels with Digital ID • AF Assist Light
- High Speed Sync-1/8000
- Controls and Triggers Canon-compatible radio-enabled flash
- Support Multiple Flash Modes and shooting approaches including E-TTL II/E-TTL, Manual, MULTI, Ext.A and Linked Shooting

SKU: 89091 Phottix Laso TTL Flash Trigger Receiver For Canon  
SKU: 89092 Phottix Laso TTL Flash Trigger Transmitter For Canon





## Odin™ II

### TTL Flash Trigger Transmitter

#### Powered by Odin Z



The Phottix Odin II TTL Flash Trigger remains the world's best triggering system, boasting new features and technologies from the Phottix Odin Z Operating System.

Fast and easy to use, the Odin II now features auto-metering and auto-switching features when used with compatible Phottix products.

SKU: 89074 Phottix Odin™ II TTL Flash Trigger Transmitter For Canon  
SKU: 89069 Phottix Odin™ II TTL Flash Trigger Transmitter For Nikon  
SKU: 89079 Phottix Odin™ II TTL Flash Trigger Transmitter For Sony  
SKU: 89080 Phottix Odin™ II TTL Flash Trigger Transmitter For Pentax  
SKU: 89072 Phottix Odin™ II TTL Flash Trigger Receiver For Canon  
SKU: 89067 Phottix Odin™ II TTL Flash Trigger Receiver For Nikon

Phottix Odin II Receivers are available separately for Canon and Nikon.

Receivers are not available for the Odin II for Sony or Pentax transmitters.

#### Features:

- 5 groups A, B, C, D, E, , 32 Channels
- Programmable Digital ID Code
- Group buttons and control dial for fast changes
- TTL Power Control +/- 3EV
- Manual Power Control 1/1 to 1/128
- High Speed Sync\*, Second Curtain Sync (Nikon, Sony only)
- AF Assist Light
- Compatible with Phottix Odin Z Operating System.
- Controls compatible Phottix products in Manual and TTL modes.

Odin II TTL Flash Trigger Receiver

Odin II TTL Flash Trigger Transmitter



## JUNO TTL

### Transceiver Flash

#### Powered by Odin Z



The Juno TTL has everything you expect from a TTL hot shoe flash – a Guide Number of 60 with TTL, Manual and Stroboscopic modes, and an adjustable flash head that can zoom to 200mm.

Beyond hot shoe flash function, the Phottix Juno TTL Flash is a powerful partner for the professional photographer.

#### Features:

- All-in-one Auto-Switching. TTL systems for Canon, Nikon, Sony and Pentax built-in into every Juno TTL. The flash will automatically adjust to the system being used.\*
- Auto-Metering. Can be used on or off camera as a light meter. The Juno TTL will tell you which power level to set.
- Real time manual power display\*
- Can be used to control other compatible products in the Phottix ecosystem.

\* When used compatible Phottix Odin II Transmitters

\*\*Rx Mode compatible with Elinchrom EL-Skyport Transmitters: Transmitter PRO, Transmitter PLUS and Transmitter Speed



The Juno TTL is the perfect flash for wedding and event photographers that need flexibility of Auto-Switching for second shooters using a different camera system. Also great for educators in a classroom setting.

For those new to lighting, the Juno TTL Auto-Metering functions makes it super-easy to get started using flash.

#### Phottix JUNO TTL Transceiver Flash Tech Specs

Guide No:	GN60 at 200mm zoom
Wireless range:	not less than 100m
Wireless Mode:	OdinII Tx, OdinII Rx, AresII Rx, SKYPORT Rx, OP Tx, OP Rx, S1 Rx
Battery power:	AA (LR6) x 4
Recycling time:	@ Full power: <4sec
Rotation:	180 degree left and right ; Up, Down: -7 to 90 degree
Dimensions:	79 x 60 x 193mm
Weight:	430g (not include battery)

Pre-production specifications.

SKU: 80100 Phottix Juno TTL Transceiver Flash (For Canon)





## Odin Lite Flash Trigger



The Odin Lite Flash Trigger is the latest in the Phottix line-up of flash triggers and provides a link between Phottix's TTL and Manual families of products.

The Phottix Odin Lite is an all-in-one manual trigger, giving users the ability to control compatible Phottix products from any camera system.

### Features:

- Real-time remote power control and triggering with compatible Phottix lighting products\*
- Works with any camera system
- 4 Groups and 32 channels

Using more than one camera system? Phottix has you covered. The Odin Lite allows photographers to control their lights from any camera.

Featuring 4 control groups, 32 channels and Phottix's Digital ID System, the Phottix Odin Lite is a cutting-edge solution for photographers using multiple systems in their workflow.

### Odin Lite Flash Trigger Technical Specs:

Frequency:	2.4 GHz
Range:	100+m
Channels:	32 channels
Groups:	4 groups- A, B, C, D
Batteries:	2 x AA Alkaline batteries / 2 x NI-MH batteries
Max. sync speed:	Sync speed of your camera (Please refer to camera manual)
Dimension:	84.1 x 68.3 x 58.5 mm (L x W x H)
Weight:	115g without batteries

\* with compatible Phottix lighting products

SKU: 89090 Phottix Odin Lite Flash Trigger Transmitter

Photo: Nikos Pekridis  
Photopek.com

## JUNO Li60

Transceiver Flash  
Powered by Odin Z

Light all day and night



Odin Z OS



ARES II  
Receiver



HSS  
SUPPORT



LITHIUM  
BATTERY



REMOTE  
POWER-CONTROL

The new Juno Li60 Flash packs Professional power and super-fast recycle times in a manual flash.

With a 3200mAh li-ion battery, the Phottix Juno Li60 with serious power for serious professionals, super-charged with Phottix's new Odin Z Operating System.

### Features:

- Long-lasting Lithium-Ion Battery
- Fast recycle times
- Pair with Phottix Odin Lite for the ultimate in manual control on any camera system
- Real time manual power display
- Compatible with other Phottix Ecosystem products\*

\* Built-in power control with Phottix Odin II or Odin Lite, triggering only with Phottix Ares II or Strato II Triggers



SKU: 80310 Phottix Juno Li60 Transceiver Flash

When paired with the Phottix Odin Lite controller, the Juno Li60 can be controlled and triggered from any camera system. Perfect for photographers shooting with different camera bodies, trigger with Odin II for HSS.

This Odin Lite and Li60 combo is the perfect travel companion for photographers on the road. Shoot all day and night and never worry about missing a shot. Power, Speed and Control – the busy location photographers new workhorse.

### Juno Li60 Transceiver Flash Technical Specs:

Guide No:	GN60 at 200mm zoom
Wireless range:	not less than 100m
Wireless Mode:	OdinII TX, OdinII RX, AresII RX, S1/S2 RX
Battery power:	Li-ion battery 7.4V 3200mAh
Battery life:	Up to 800 cycles @ full power
Recycling time:	Up to 1.5 Seconds @ full power
Rotation:	180 degree left and right ; Up, Down: -7 to 90 degree
Dimensions:	79 x 60 x 193mm
Weight:	410g (not include battery)

Pre-production specifications.





**Ares™ II**  
Flash Trigger

Odin Z OS STRATO II RECEIVER 16 CHANNELS 4 GROUPS 150 METERS RANGE

## 16 Channels of Awesomeness

Phottix's budget-friendly flash trigger system – the Phottix Ares II, boasts the latest technology and is perfect for manual shooting with studio lights or hot shoe flashes.

### Features:

- Transmitter and Receiver with LCD display
- 16 Channels (Strato II compatibility on channels 1-4)
- 4 Groups, A-D
- User programmable Digital ID Code
- Compatible with other Phottix products\*

SKU: 89550 Phottix Ares II Flash Trigger Set  
SKU: 89552 Phottix Ares II Flash Trigger Transmitter  
SKU: 89553 Phottix Ares II Flash Trigger Receiver



Ares II Flash Trigger Transmitter



Ares II Flash Trigger Receiver



## Juno Transceiver Flash



## Your new favorite "old school" chum

Phottix has spent a lot of time focused on being cutting-edge with the newest and most innovative technologies. We focused this innovative mindset on a powerful yet easy-to-use manual hot shoe flash.

**The result: The Phottix Juno.**

### Features:

- GN 58 Manual Hot Shoe Flash
- Adjustable over 8 stops, in 1/3 stop increments
- Compatible with most major camera systems
- Built-in Phottix Ares II Transmitter and Receiver
- 1/4" x20 Mounting Lug



SKU: 80363 Phottix Juno Transceiver Flash SKU: 80365 Phottix Juno Ares II Combo  
SKU: 80364 Phottix Juno "Ready to Go" Kit SKU: 80366 Phottix Juno Ares II Double Pack



# Phottix®

## 8 SIZES and STYLES

### G-Capsule

MultiFunction EZ-Up MODIFIER  
with Magnetic Gel Filter Set

## FEATURES

- The world's first all-in-one panorama softbox
- 8 sizes and styles
- Shoot-through umbrella combined with softbox and grid allows for many uses
- Integrated Magnetic Gel Filter Holder with 4 Color Gel Filter
- Uses Phottix's Heat resistant SL Tech material
- "ONE Push Release" Unlock Button for easy take-down
- 4 / 16 Fiberglass Ribs with white interior
- Swappable speed rings for popular lighting brands
- Supports speedlites, strobes, monolights, continuous lights and LEDs
- Travel Bag included

## What is "G"



The innovative and patented gel filter holder fitted out with magnetic mechanism at both sides allows the change of color gel filter in seconds. Use the gels to create a special mood at your shooting set up.

Innovation never stops. Following the success of the worldwide popular Raja softbox, Phottix is proud to announce the new series G-Capsule Multifunction EZ-up modifiers.

G-Capsule series is the world's first All-in-One panorama light softbox with patents that features four modes: Softbox, Grid, Beauty Dish and Lantern.




The G-Capsule series has black exterior, white interior surface, 4 and 16 fiberglass ribs structure. The fiberglass ribs are light yet robust and durable, and can be easily folded to save on storage space. The softbox comes with a carrying bag.

The G-Capsule series comes in eight sizes, and shapes such as parabolic deep, rectangular strip, and round-shaped. It is equipped with a popular Bowens Mount that is compatible with all-time popular Bowens-type mount accessories for Strobe, Flash or LED lights. Swappable mount for Elinchrom and Profoto are available too and sold separately.

## How to used lantern mode?

Shoot-Through Umbrella and softbox can be easily combined with Velcro on the edges of both, you can also use them separately for other light shaping purposes.

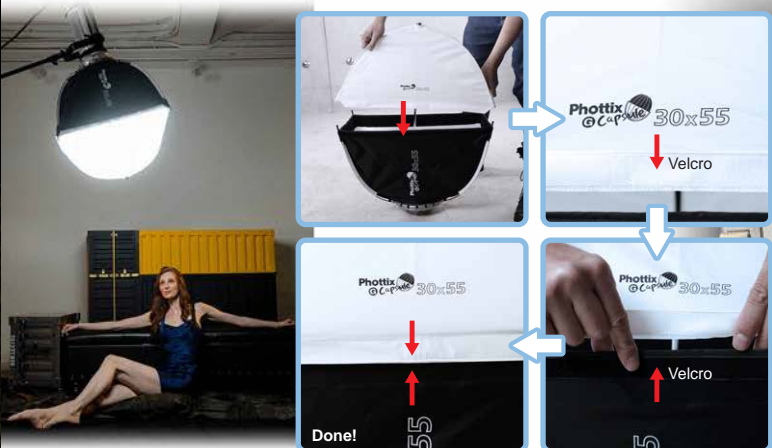

## "ONE Push Release" Unlock Button system

Strengthened Unlock Button system, most Innovative "ONE Push Release" folds up Unlock Button – easy folding set up non-assemble design let you save disassemble time and improve shooting efficiency.



### 1 Phottix G-Capsule Deep Softbox

40cm (16") - SKU 83720

**Specifications:**

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 400mm x 660mm
Unfold Dimension (Softbox):	dia 400mm x 410mm
Unfold Dimension (Umbrella):	dia 400mm x 250mm
Collapsed Dimension (Softbox):	dia 180mm x 440mm
Collapsed Dimension (Umbrella):	370mm x 170mm x 80mm
Weight:	
Softbox with Bowens mount:	1,135g
Umbrella:	346g
Softbox with Bowens mount + Umbrella:	1,481g

### 2 Phottix G-Capsule Deep Softbox

85cm (33") - SKU 83724

**Specifications:**

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 850mm x 940mm
Unfold Dimension (Softbox):	dia 850mm x 560mm
Unfold Dimension (Umbrella):	dia 850mm x 380mm
Collapsed Dimension (Softbox):	dia 180mm x 720mm
Collapsed Dimension (Umbrella):	610mm x 290mm x 120mm
Weight:	
Softbox with Bowens mount:	1,570g
Umbrella:	491g
Softbox with Bowens mount + Umbrella:	2,061g

### 3 Phottix G-Capsule Softbox

65cm (26") - SKU 83721

**Specifications:**

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 650mm x 690mm
Unfold Dimension (Softbox):	dia 650mm x 340mm
Unfold Dimension (Umbrella):	dia 650mm x 350mm
Collapsed Dimension (Softbox):	dia 180mm x 460mm
Collapsed Dimension (Umbrella):	530mm x 220mm x 100mm
Weight:	
Softbox with Bowens mount:	1,156g
Umbrella:	438g
Softbox with Bowens mount + Umbrella:	1,594g

### 4 Phottix G-Capsule Softbox

85cm (33") - SKU 83722

**Specifications:**

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 850mm x 740mm
Unfold Dimension (Softbox):	dia 850mm x 380mm
Unfold Dimension (Umbrella):	dia 850mm x 360mm
Collapsed Dimension (Softbox):	dia 180mm x 560mm
Collapsed Dimension (Umbrella):	610mm x 280mm x 120mm
Weight:	
Softbox with Bowens mount:	1,344g
Umbrella:	505g
Softbox with Bowens mount + Umbrella:	1,849g

### 5 Phottix G-Capsule Softbox

105cm (41") - SKU 83723

**Specifications:**

Shape:	Octagonal
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	dia 1050mm x 900mm
Unfold Dimension (Softbox):	dia 1050mm x 460mm
Unfold Dimension (Umbrella):	dia 1050mm x 440mm
Collapsed Dimension (Softbox):	dia 180mm x 650mm
Collapsed Dimension (Umbrella):	700mm x 300mm x 120mm
Weight:	
Softbox with Bowens mount:	1,589g
Umbrella:	642g
Softbox with Bowens mount + Umbrella:	2,231g

### 6 Phottix G-Capsule Softbox

30x55cm (12"x22") - SKU 83725

**Specifications:**

Shape:	Rectangular
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	300mm x 550mm x 660mm
Unfold Dimension (Softbox):	300mm x 550mm x 370mm
Unfold Dimension (Umbrella):	300mm x 550mm x 290mm
Collapsed Dimension (Softbox):	dia 180mm x 470mm
Collapsed Dimension (Umbrella):	440mm x 150mm x 80mm
Weight:	
Softbox with Bowens mount:	824g
Umbrella:	262g
Softbox with Bowens mount + Umbrella:	1,086g

### 7 Phottix G-Capsule Softbox

60x90cm (24"x35") - SKU 83726

**Specifications:**

Shape:	Rectangular
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	600mm x 900mm x 980mm
Unfold Dimension (Softbox):	600mm x 900mm x 520mm
Unfold Dimension (Umbrella):	600mm x 900mm x 460mm
Collapsed Dimension (Softbox):	dia 180mm x 700mm
Collapsed Dimension (Umbrella):	840mm x 160mm x 70mm
Weight:	
Softbox with Bowens mount:	1,114g
Umbrella:	386g
Softbox with Bowens mount + Umbrella:	1500g

### 8 Phottix G-Capsule Softbox

30x140cm (12"x55") - SKU 83727

**Specifications:**

Shape:	Strip
Interior:	White
Dimension:	
Unfold Dimension (Softbox + Umbrella):	300mm x 1400mm x 940mm
Unfold Dimension (Softbox):	300mm x 1400mm x 550mm
Unfold Dimension (Umbrella):	300mm x 1400mm x 390mm
Collapsed Dimension (Softbox):	dia 180mm x 890mm
Collapsed Dimension (Umbrella):	840mm x 140mm x 120mm
Weight:	
Softbox with Bowens mount:	1,268g
Umbrella:	495g
Softbox with Bowens mount + Umbrella:	1,763g

## What's Included

Phottix G-Capsule Softbox • Phottix G-Capsule Shoot-Through Umbrellas • S-mount • Inner baffle (Reflective) • Inner baffle (Shoot-Through) Outer diffuser • Fabric grid • Gel Filter Holder • 4 Color Gel Filter : Red, Yellow, Green, Blue • Carrying bag






## Raja Quick-Folding Softbox

The Phottix Raja series opens simple like an umbrella and is ready to use in seconds. Pop it open, add the baffle, diffuser and grid – mount on your studio light, you're ready to shoot.

### The Phottix Raja / Raja Deep series features:

- Heavy-duty construction
- Uses Phottix's Heat resistant SL Tech material
- Easy to assemble
- 10 sizes and styles
- Swapable speed rings for popular lighting brands
- Travel Bag included

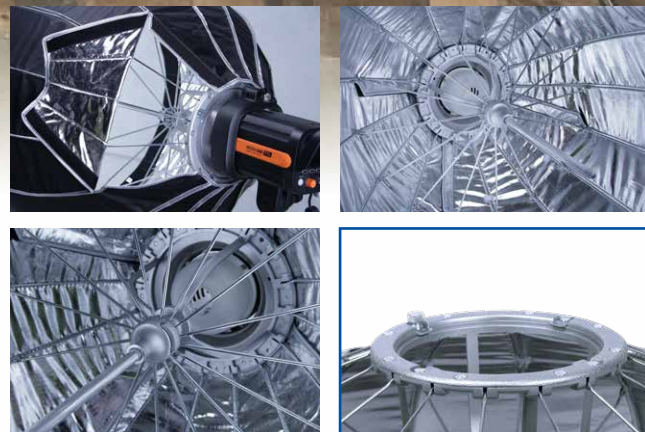

## Raja Deep Quick-Folding Softbox

### Why Deep?

Deep Softboxes are loved by professional photographers - and for good reason: They produce a more directional light with greater contrast than traditional softboxes – with more even illumination. They are versatile – offering different looks by adding or subtracting the baffle and or diffuser.

### Phottix Speed Ring Inserts for Raja Series

82584 Phottix Speed Ring - Inner Ring For Elinchrom (144mm)  
82585 Phottix Speed Ring - Inner Ring For Balcar (144mm)  
82588 Phottix Speed Ring - Inner Ring For Profoto (144mm)

### 10 sizes and styles of Phottix Raja Softboxes Models

- |                                |   |
|--------------------------------|---|
| 1.) 82723 Raja Deep 60cm (24") | 6.) 82729 Raja 120cm (47")                |
| 2.) 82724 Raja Deep 80cm (32") | 7.) 82727 Raja 150cm (59")                |
| 3.) 82721 Raja 65cm (26")      | 8.) 82720 Raja 60x90cm (24"x35")*         |
| 4.) 82728 Raja 85cm (33")      | 9.) 82726 Raja 80x120cm (32"x47")*        |
| 5.) 82722 Raja 105cm (41")     | 10.) 82725 Raja Strip 30x140cm (12"x55")* |

Licensed under U.S. Patent No. 6,733,145

### What's included

Phottix Raja / Raja Deep Quick-Folding Softbox • Metal Disk (\*Not Included)  
S-mount • Inner baffle • Outer diffuser • Carrying bag  
Fabric grid (Raja 120 and 150 NOT included\*)





# Premio

## Parabolic Umbrellas Series


The Premio Series feature innovative enhancements, making them both a durable and premium "go-to" lighting modifier.

The Premio series reflective models and also come in shoot-through models with 85cm/33", 105cm/41", 120cm/47" and 165cm/65" (reflective models white Interior only\*) sizes.

The umbrellas feature heavy-duty construction, made with fiberglass spokes for cleaner catch-lights and enhanced durability that will stand up to the rigors of on location work as well as in the studio.

Phottix Premio Reflective Umbrella  
White Interior / Back Exterior

- SKU: 85377 (85cm/33")
- SKU: 85378 (105cm/41")
- SKU: 85379 (120cm/47")
- SKU: 85387 (165cm/65")

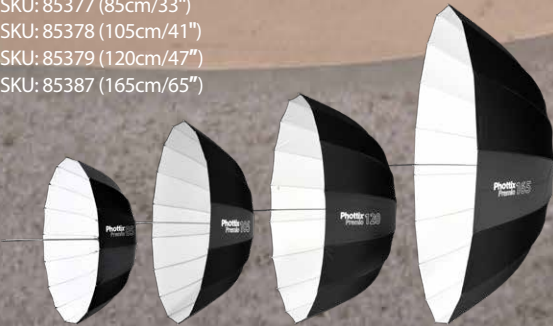


Phottix Premio Diffuser  
For Reflective Umbrella

- SKU: 85375 (85cm/33")
- SKU: 85374 (105cm/41")
- SKU: 85376 (120cm/47")
- SKU: 85388 (165cm/65")



Phottix Premio Reflective Umbrella  
Silver Interior / Back Exterior

- SKU: 85372 (85cm/33")
- SKU: 85371 (105cm/41")
- SKU: 85373 (120cm/47")

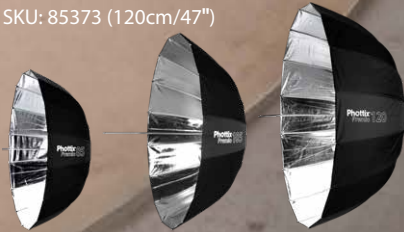

White diffusers are available for the Phottix Premio Reflective models - easily turning them into a large softbox.

A black, reflective backing is available for the shoot-through models – helping to better control light spill, as well as putting more light on target.

Phottix Premio Shoot-Through Umbrella

- SKU: 85382 (85cm/33")
- SKU: 85381 (105cm/41")
- SKU: 85383 (120cm/47")



Phottix Premio Black Backing  
For Shoot-Through Umbrella

- SKU: 85385 (85cm/33")
- SKU: 85384 (105cm/41")
- SKU: 85386 (120cm/47")



Technical Specs	Reflective Umbrella					Shoot-Through Umbrella			
	Unfold Dimensions:	Collapsed Length:	Unfold Depth:	Weight:	Colour:	Unfold Dimensions:	Collapsed Length:	Unfold Depth:	Weight:
<b>Phottix Premio 85</b>	85cm/33" 85cm/33"	70cm/27.5" 70cm/27.5"	35cm/13.8" 35cm/13.8"	540g 570g	S&B W&B	85cm/33"	70cm/27.5"	35cm/13.8"	490g
Diffuser / Black Backing	95cm/37.4"			250g		95cm/37.4"			230g
<b>Phottix Premio 105</b>	105cm/41" 105cm/41"	77cm/30.3" 77cm/30.3"	38cm/15" 38cm/15"	700g 730g	S&B W&B	105cm/41"	77cm/30.3"	38cm/15"	670g
Diffuser / Black Backing	112cm/44"			290g		112cm/44"			290g
<b>Phottix Premio 120</b>	120cm/47" 120cm/47"	89cm/35" 89cm/35"	50cm/19.7" 50cm/19.7"	940g 1020g	S&B W&B	120cm/47"	89cm/35"	50cm/19.7"	880g
Diffuser / Black Backing	130cm/51.2"			310g		130cm/51.2"			310g
<b>Phottix Premio 165</b>	165cm/65"	110cm/43.3"	60cm/23.6"	1350g	W&B				
Diffuser	177cm/70"			340g					





# Umbrellas Series



SKU: 85370  
black exterior, white interior.  
**Reflective Studio Umbrella - 101cm (40")**  
Producing beautiful light softer and more contrast.



SKU: 85340  
black exterior, silver interior.



SKU: 85341 (Reflective)  
black exterior, silver interior.  
**Double-Small Folding Umbrella - 91cm (36")**  
Super-compact double folding umbrella  
perfect for the on-the-go photographer.



SKU: 85361 (Shoot-Through)  
white exterior, white interior.



SKU: 85360 101cm (40")  
white exterior and white interior.  
**White Photo Studio Diffuser Umbrella**  
The essential standard studio umbrella



# Studio Pro

## Light Stand / Boom Stand Series


Made of advanced stainless steel, firm and durable, suitable for professional studios, advertising agencies, television and film crew.

# Studio Pro


## Light Stand / Boom Stand Series

Introducing the new Phottix Studio Pro Light Stand & Boom Stand series to better serve the expanding filmmaking and studio photography industries all of the Phottix Studio Pro products are heavy-duty and ready to serve the needs and demands of serious professionals.

All products were created with feedback from international creative professionals. Like all Phottix products, the Studio Pro series offers dependable and affordable solutions.

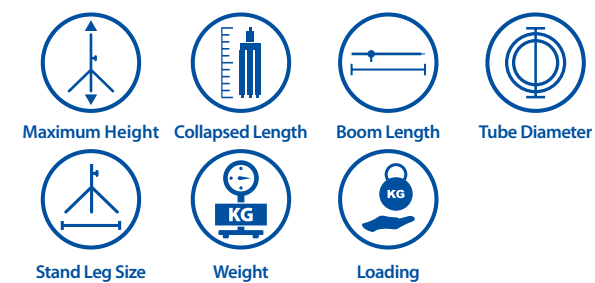

### Studio Pro series features

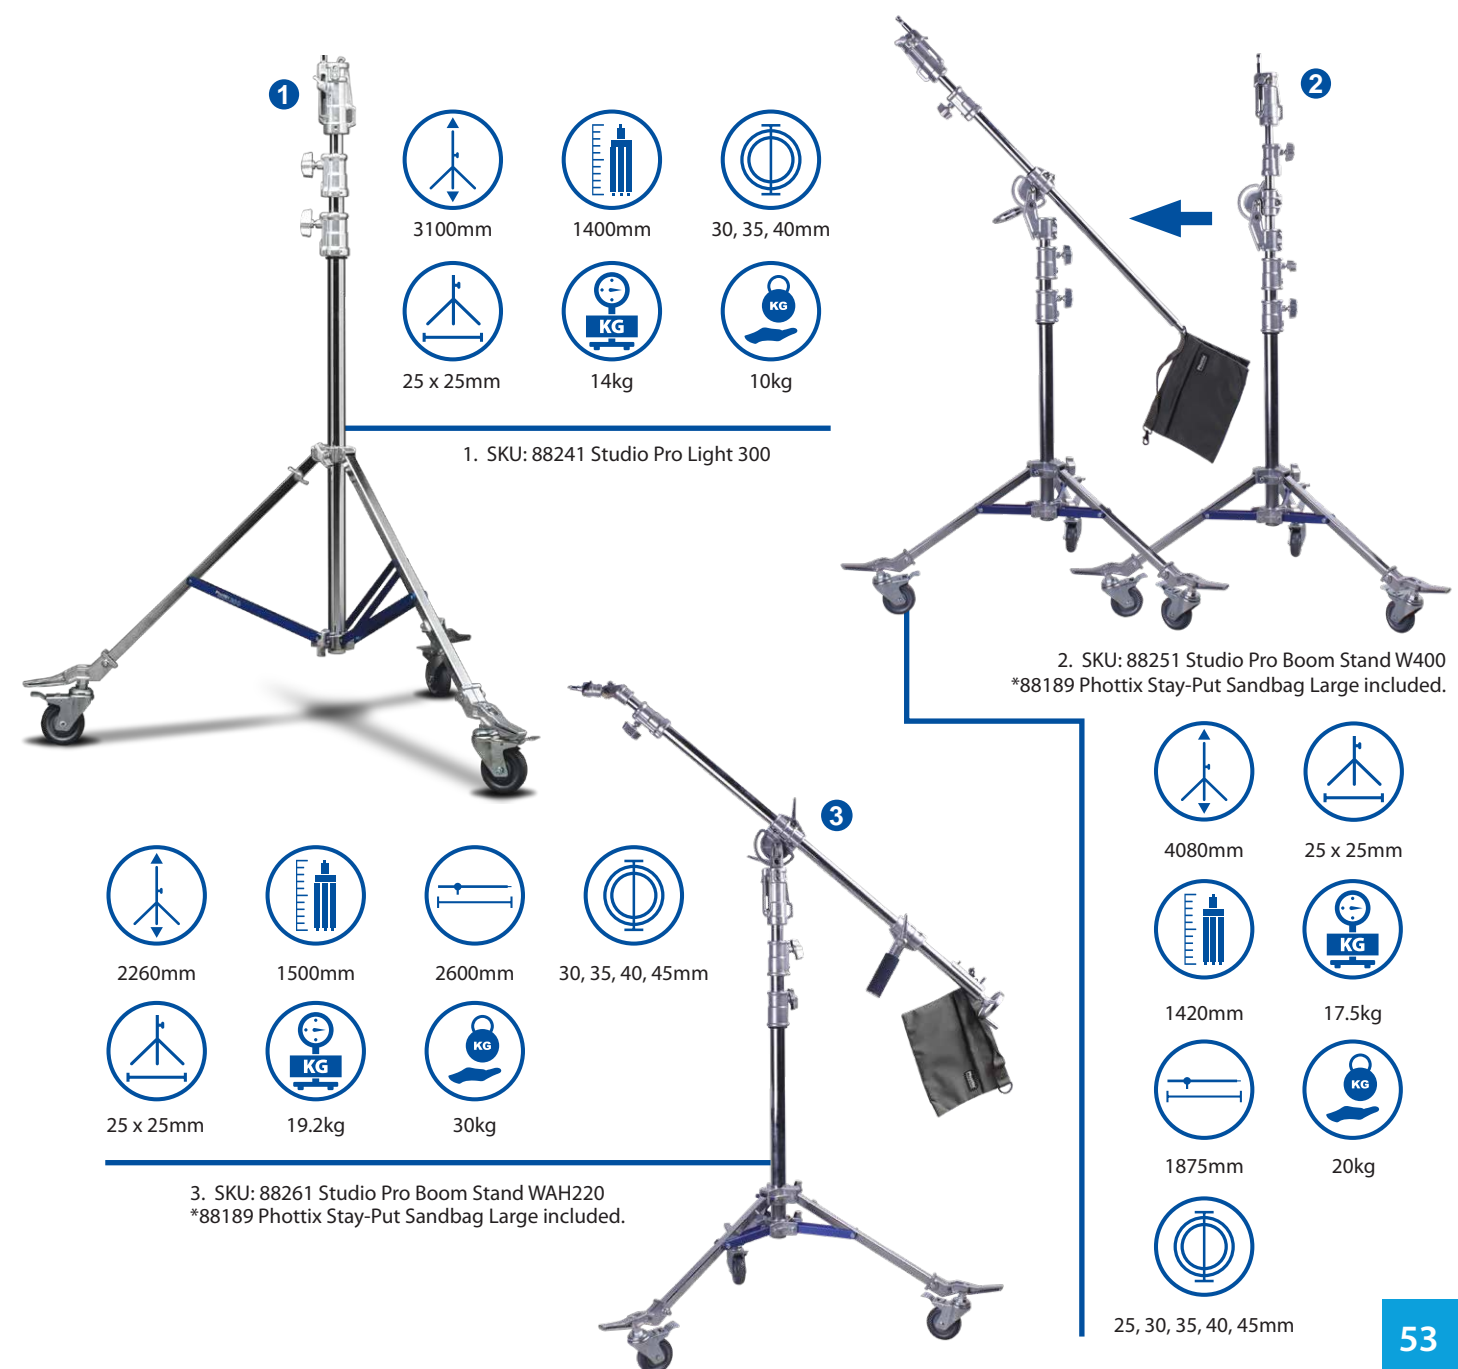





# Phottix C-Roller 210

Rolling C-Stand (H210cm/82")

## Features

- Steel construction.
- A Standard mount (16mm pin) top of the center column.
- The three sections center column detachable for transport.
- The center column comes with the rubber ring that provides protection to prevent the pole sudden fall down when the section lock is released.
- The center column cable collectors to organize and store all the cables.
- Comes with one grip arm and two grip heads.
- The rolling base risers with a standard 1-1/8" (28mm) junior stud.
- The compact foldable design of rolling Base.
- Wheels with locking brake included.



2100mm



990mm



1070mm



740mm



25, 30, 35mm



9.1kg



Maximum Height



Collapsed Length



Boom Length



Tube Diameter



FootPrint Width



Weight

88262 Phottix C-Roller 210 Rolling C-Stand (H210cm/82")  
88263 Phottix C-Stand adapter (H19cm/7.4")  
88264 Phottix Tray24 Light Stand Tray (L45 x W40cm)

## What's Included



The Center Column x 1 • Grip Arm x 1 • Grip Heads x 2 • Rolling Base x 1 • Wheels x 3

## Specification

Minimum Height:	990mm
Maximum Height:	2100mm
Footprint Diameter:	740mm
Stand Leg Size:	25x25
Number of Sections:	3
Column Tube Diameter:	25mm, 30mm, 35mm
Section Height:	990mm, 1530mm, 2100mm
Center Column Thread:	5/8" (16mm)
Rolling Base Stud size:	1-1/8" (28mm)
Rolling Base Height:	165mm
Rolling Base Folded size:	421x160mm
Grip Arm Length:	1070mm
Grip Arm Thread:	1/4" & 5/8" Thread
Grip Heads Compatible Diameter:	8/10/12/16mm
Net Weight:	9.1kg


# Phottix Tray 24

Light Stand Tray (L45 x W40cm)

88264 Phottix Tray24 Light Stand Tray (L45 x W40cm)



1. 5/8" Receiver
2. 1/4"-20 Female
3. 3/8"-16 Female



Rubber tray mat  
(45 x 39cm)

## Features

- 17 x 15" Laptop Platform
- Multiple mounting Options
- Raised Lips prevent place objects Movement
- Solid steel Construction
- Compatible with tripods and light stands
- 1/4"-20 and 3/8"-16 threaded sockets
- 5/8" receiver with locking knob
- Raised 0.8mm lips
- Arca-type base
- Included rubber tray mat (45 x 39cm)



It can be used as a mobile workbench in conjunction with C-Roller 210

\*Laptop, camera, smartphone and light stand are not included.




Suitable for Arca-type base ball head



5/8" receiver with lock install to the heavy duty light stand

Photo is for reference only\*  
Phottix C-Roller 210 Rolling C-Stand (H210cm/82") NOT included.

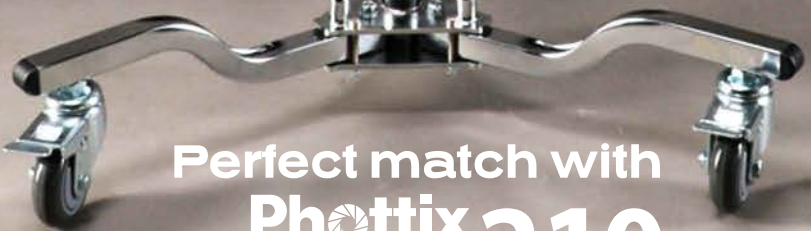

# Perfect match with Phottix C-Roller 210

Rolling C-Stand (H210cm/82")

88262 Phottix C-Roller 210 Rolling C-Stand (H210cm/82")  
88263 Phottix C-Stand adapter (H19cm/7.4")

## Specification

Dimensions:	450 x 400mm , 450 x 390mm ( Rubber tray mat )
Bottom Receiver:	1/4"-20 Female, 3/8"-16 Female, 5/8" Receiver
Material:	Steel
Net Weight:	1.65kg





# Phottix

## C-Stand Adapter (H19cm/7.4")

### Features

- Suitable for use to fit into:
  - ✓ Phottix C-Roller 210
  - ✓ Heavy duty light stands
  - ✓ Turtle base c-stands
- to mount standard studio flash or video lighting fixtures
- 1-1/8" (28mm) in Junior size stand adapter stud is 5/8" (16mm)
- Solid steel and chrome plated body

### Specification

Stud size :	1-1/8"(28mm) to 5/8"(16mm)
Weight :	0.62kg
Height :	190mm

88263 Phottix C-Stand adapter (H19cm/7.4")



Suitable for C-Roller 210 Rolling base risers with 1-1/8" (28mm) junior stud.



Suitable for use to the turtle base of a C-Stand



## Perfect match with Phottix C-Roller 210

Rolling C-Stand (H210cm/82")



88264 Phottix Tray24 Light Stand Tray (L45 x W40cm)  
88262 Phottix C-Roller 210 Rolling C-Stand (H210cm/82")

# Mini C-Stand

## H46cm / 18"

### Features

- Three Sections Design
- Multifunction and Portable
- Miniature Stainless Steel body
- Grip Heads build on mini C-Stand Body
- Boom Arm included a Ball Head and 1/4" Male Screw
- Dual Ball Head allow 360-degree rotation
- Maximum Height Of The Stand is 46.5 cm
- Telescopic height : 26, 36, 46.5cm
- Tabletop and handheld Applications

Ball Head with 1/4" Screw



Ball Head with 1/4" Screw

1/4" Screw



Grip Heads with 3/16" / 4.76mm Holes allow extend to 10mm



Miniature Stainless Steel Body

Suitable for


- Desktop Studio
- Photography
- Live Streaming
- Selfie Fill Light
- Product Shooting Fill Light
- Microphone Stand
- Mini Tripod
- more...

Sliding Leg (Top and Middle Leg)

3 Sections Telescopic height 26, 36, 46.5cm

88227 Phottix Mini C-Stand (H46cm/18")

### What's Included

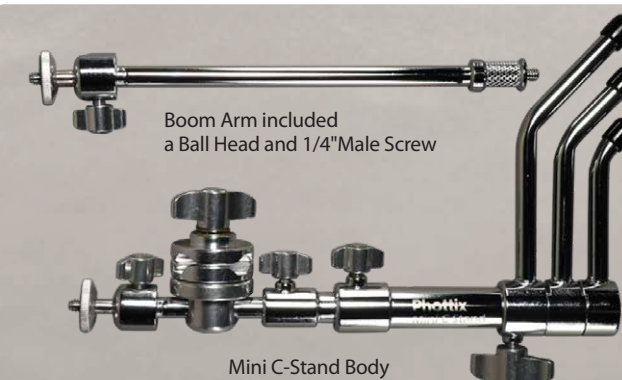

### Specification


Minimum Height:	260mm
Maximum Height:	465mm
Footprint Diameter:	280mm
Number of Sections:	3
Section Height:	260mm , 360mm , 465mm
Thread:	1/4"-20 male Thread (ball head & boom arm)
Net Weight:	980g





## Padat Carbon 198

### Carbon Fiber Compact Light Stand



The Phottix Padat Carbon Fiber Compact Light Stand (198cm/78") is the world's lightest light stand weighing in at a remarkable 596 grams\*! When collapsed, the 19-inch Padat Carbon 198 Light Stand fits in any carry-on luggage or gear bag.


While compact, the Phottix Padat Carbon Fiber rises to any occasion, extending to 6.5 feet when fully extended, topped with a 1.4" threaded mount.

The flat-folding Phottix Padat Carbon Fiber is perfect to location and traveling photographers. It folds flat making it easy to pack and its weight barely making a dent in your luggage allowance.

#### Padat 198 features:

- Light-weighs in a 600g - the same as a bottle of water.
- Packs Flat
- Great for location work
- Perfect for hot shoe flashes

88218 Phottix Padat Carbon Fiber Compact Light Stand (198cm/78")\*  
Patent Number: ZL 201730228322.6



1980mm



495mm x 66mm x 38mm



490-495mm



1.5kg



596g\*



## Padat 300

### Compact Light Stand

Phottix Padat Compact Light Stand (300cm/118") featuring an innovative Fast Assembly Mortise Module (FAMM), the stand can be bought together or separately. Connect them according to your needs for a made-to-measure piece of equipment; an innovative space-saving feature.

Practical as well as clever, its compact design easily fits into your bag so you'll always be ready for those demanding outdoor shoots. Slot everything neatly into a more compact case to keep things neat at the studio.

#### Padat 300 features:

- Extends to 3m
- Space-Saving design of FAMM can slot together for complete portability
- Flat foot base reduce environmental limitations by setting the light source
- Air cushion design protects gear and fingers



Padat 300 FAMM - Middle Lock




Padat 300 FAMM - Leg Lock



Fast Assembly mortise module  
Middle Lock

88217 Phottix Padat Compact Light Stand (300cm/118")



3000mm



800 mm x 80 mm x 70 mm



880mm



5kg



2100g





Phottix®  
Saldo®

Photo: Krish Nagar  
ig@krishnagarphotography

# Saldo


Light Stand Series

Unique a Head-Turning Two-Tone  
Chrome and Black look




## Saldo Light Stands Series

Featuring a head-turning two-tone chrome and black look. The Saldo series offer the same great durability and affordability that have become Phottix trademarks.



SKU: 88208  
Saldo 62 Light Stand (62cm/24")


1



\*Sandbag included

SKU: 88197  
Saldo 160 Light Stand Boom Arm (160cm/63")


2



SKU: 88222  
Saldo 245A Air Cushion Automatic Collapsible Light Stand (H245cm/96")


FOLD IT UP

OPEN UP



SKU: 88211  
Saldo 280 Air Cushion Light Stand (280cm/110")

4



\*Sandbag included

SKU: 88221  
Saldo Studio Boom Light Stand (395cm/156")

5

Wheel Diameter	75mm
Fitting Size	22mm (Round Leg)
Net Weight	2kg (3 wheels)



\*What's included  
• 3 x 22mm wheels • 3 x Metal fitting inserts

SKU: 88223  
Light Stand Wheel Set of 3 for Saldo280, Saldo395

6



7

SKU: 83431  
Saldo Backdrop Stand Kit (2.8x3.2m)  
• Support muslin and paper backdrop up to 3m wide  
• 2 x Saldo 280 Air Cushion Light Stand (280cm/110")  
• Comes with carrying Bag  
• 4 sections removable horizontal bar (80cm each)





# Phottix®

## F-180 Light Stand (H/180cm/71")



The Phottix F-180 Light Stand (H/180cm/71") may be the world's shortest light stand height at 46cm when collapsed, easily transported from one location to another, adjustable for many lighting situations.

While compact, It is designed with reverse fold back structure design for simple storage and transport, at making it easy to pack and its weight barely making a dent in your luggage allowance. Quick Release Flip-Locks saving much of your time for your lighting setup best than twist-lock type.



Quick Release Flip-Locks



Reverse fold Design

F-180 is extending to 5.9 feet when fully extended, topped with a 1.4" threaded mount widely used as a support system for most of photographic equipment such as different lights of strobe/flash light and light-weight LED light (Nuada Ring 60, Nuada S/P, Kali150, M180, M200R).



99911 Phottix F-180 Light Stand (H/180cm/71")

# Phottix®

## F-160 Light Stand (H/155cm/61")

Phottix F-160 Light Stand (H/155cm/61") is the ideal solution for the user looking for a baby lightweight and quick setup. This is extendable height from min. 46.5cm/18.3" to max.155cm/61" closed length 46.5cm for storage and lightweight 555grams. The compact design makes it portable to carry around. It is five column sections and quick release flip-lock that easy to set up in seconds.

### Features

Top Of The Light Stand With Multi Angle Adjustment

- Vertical 360 Adjustment Knob
- Horizontal 180 Degree Angle Adjustable

Compact And Shortest Collapsed Height 46.5cm

Light-weight 555g Only

Quick Release Flip-locks

Vertical 360 Degree Rotatable Via Adjustment Knob



Flexible head with 1/4" screw provide vertical 360 degree rotation via Adjustment knob and horizontal 180-degree rotation angle for the smartphone to get different best shooting position. It comes with a universal phone clamp with cold shoe mount and packing bag.


Horizontal 180 Degree Angle Adjustable



The phone clamp (packing included) is spring-loaded and extends up to 4" wide, it is compatible with almost all smartphones with or without a case.



Good match with Phottix lightings and microphone like Nuada Ring 10, Nuada S/P, M180 or M200R for live streaming, selfie photos, video recording, tutorial video, vlogging etc...

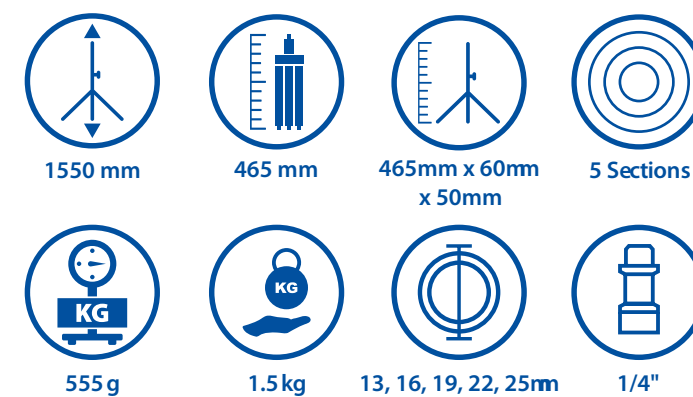

Quick Release Flip-locks



99905 Phottix F-160 Light Stand (H/155cm/61")



3 Sections

2,000 mm

700 mm

55mm x 50mm  
x 700mm

1,000 g

5 kg

16, 19, 22.2, 25.4 mm

1/4"

**PX 200**  
Light Stand (200cm/79 )  
Charcoal Black

**PX 200W**  
Light Stand (200cm/79 )  
Pearl White

3 Sections

2,800 mm

950 mm

80mm x 75mm  
x 950mm

2,000 g

15kg

22.4, 25.4, 28.6, 31.7 mm

1/4"

**PX 280W**  
Light Stand (280cm/110")  
Pearl White

## Features

- Rugged and durable Die-cast steel tube
- Frosting technology of light stand tube surface
- The top of the three-pronged design of the light stand, it is firmly locked with the extra large screw and the light stand legs to provides more stable loading
- Base of the light stand adopts a sturdy load-bearing structure
- Stylish and streamlined corner design
- Engineering grade plastic material knob light stand section lock
- Each part of the light stand adopts galvanized thickened screws to effectively prevent rust
- There is an anti-collision soft rubber ring between the tube sections of the light stand, which acts as a buffer when the tube suddenly drops when unlocked, and protects the lamp holder and photographic equipment.

## Technical Specs:

Extended height	2,000mm (PX-200, PX-200W) 2,800mm (PX-280W)
Collapsed height	700mm (PX-200, PX-200W) 950mm (PX-280W)
Sections	3
Tube diameters	25.4, 22.2, 19, 16 mm (PX-200, PX-200W) 31.7, 28.6, 25.4, 22.4 mm (PX-280W)
Footprint diameters	770mm (PX-200, PX-200W) 1,200mm (PX-280W)
Weight	1 kg (PX-200, PX-200W) / 2 kg (PX-280W)
Supports	5 kg (PX-200, PX-200W) / 15 kg (PX-280W)
Thread	1/4" Thread (PX-200, PX-200W, PX-280W)
Color	White (PX-200W, PX-280W), Black (PX-200)

**Phottix MT5**  
BALL HEAD KIT  
Light Stand Adapter

### Features

- Includes accessories that can be assembled with a light Stand adaptor
- Mount a tripod ball head or other tripod Head on any light stand
- Convert Baby 5/8" (16mm) stud or Junior 1-1/8" receiver into a 3/8"-16 thread
- Compatible and conveniently applied to light stands, C-Stands, boom arms stand or multi-clamps, etc...



## MT5 Light Stand Adapter Ball Head Kit Specification

Light Stand Adapter		Ball Head	
Upper screw :	1/4 inch	Swivel head :	360°Rotation
Upper diameter :	44mm		90° Tilting Rotating
Bottom diameter :	26mm	Upper screw :	1/4 inch
Bottom Inner diameter :	16mm	Bottom thread :	1/4 inch
Height :	51mm	Height :	74mm
Weight :	85g	Weight :	110g

## What's included

- Ball head
- Smartphone Clip
- Light Stand adaptor
- Cold shoe





Photo: Ali G  
Aligstudios.com



## Varos Pro

### Multi-Function Flash Shoe Umbrella Holder

The Varos Pro series is 300% stronger than previous versions and features Aluminum alloy body with a metal coldshoe, 3/8" and 1/4" female threaded insert, male 3/8" and 1/4"s crews included.

The Teardrop-shaped umbrella mount accepts umbrella with shafts 7-10mm and the 8 degrees slanted umbrella mount allows more light to hit the center of the umbrella. The Patented umbrella clamp has been redesigned to offer 300% more locking force while keeping umbrella shafts more secure and damage free.



The Phottix Varos Pro Family Technical Specs:

Model:	S	M	BG
SKUs:	87200	87199	87198
Material:	Aluminum alloy body with metal flash cold shoe		
Mount:	Metal cold shoe 5/8" (16 mm) with 3/8"-16 and 1/4"-20" threaded female insert 5/8" (16 mm) with 3/8"-16 and 1/4"-20" threaded male insert		
Load Capacity:	25 kg (55 lb)	28 kg (62 lb)	30 kg (66 lb)

SKU: 87200 Varos Pro S Multi-Function Flash Shoe Umbrella Holder  
SKU: 87199 Varos Pro M Multi-Function Flash Shoe Umbrella Holder  
SKU: 87198 Varos Pro BG Multi-Function Flash Shoe Umbrella Holder

**Phottix®**  
Phottix.com



PhottixPPA @phottixjournal @Phottix PhottixHQ

Unit 1 & 13, 8/F., Block B, Hoi Luen Ind. Centre, 55 Hoi Yuen Rd, Kwun Tong, Kln, Hong Kong, China.  
Tel: +852 2575 0739 | Fax: +852 2572 8207 Sales@phottix.com | Tech@phottix.com